

2019-2020

Industrial


PRODUCT GUIDE



 **RUST-OLEUM**
CANADA

**CHANGE
THE WAY
YOU SEE
THINGS**

**TAP INTO
THE POTENTIAL**

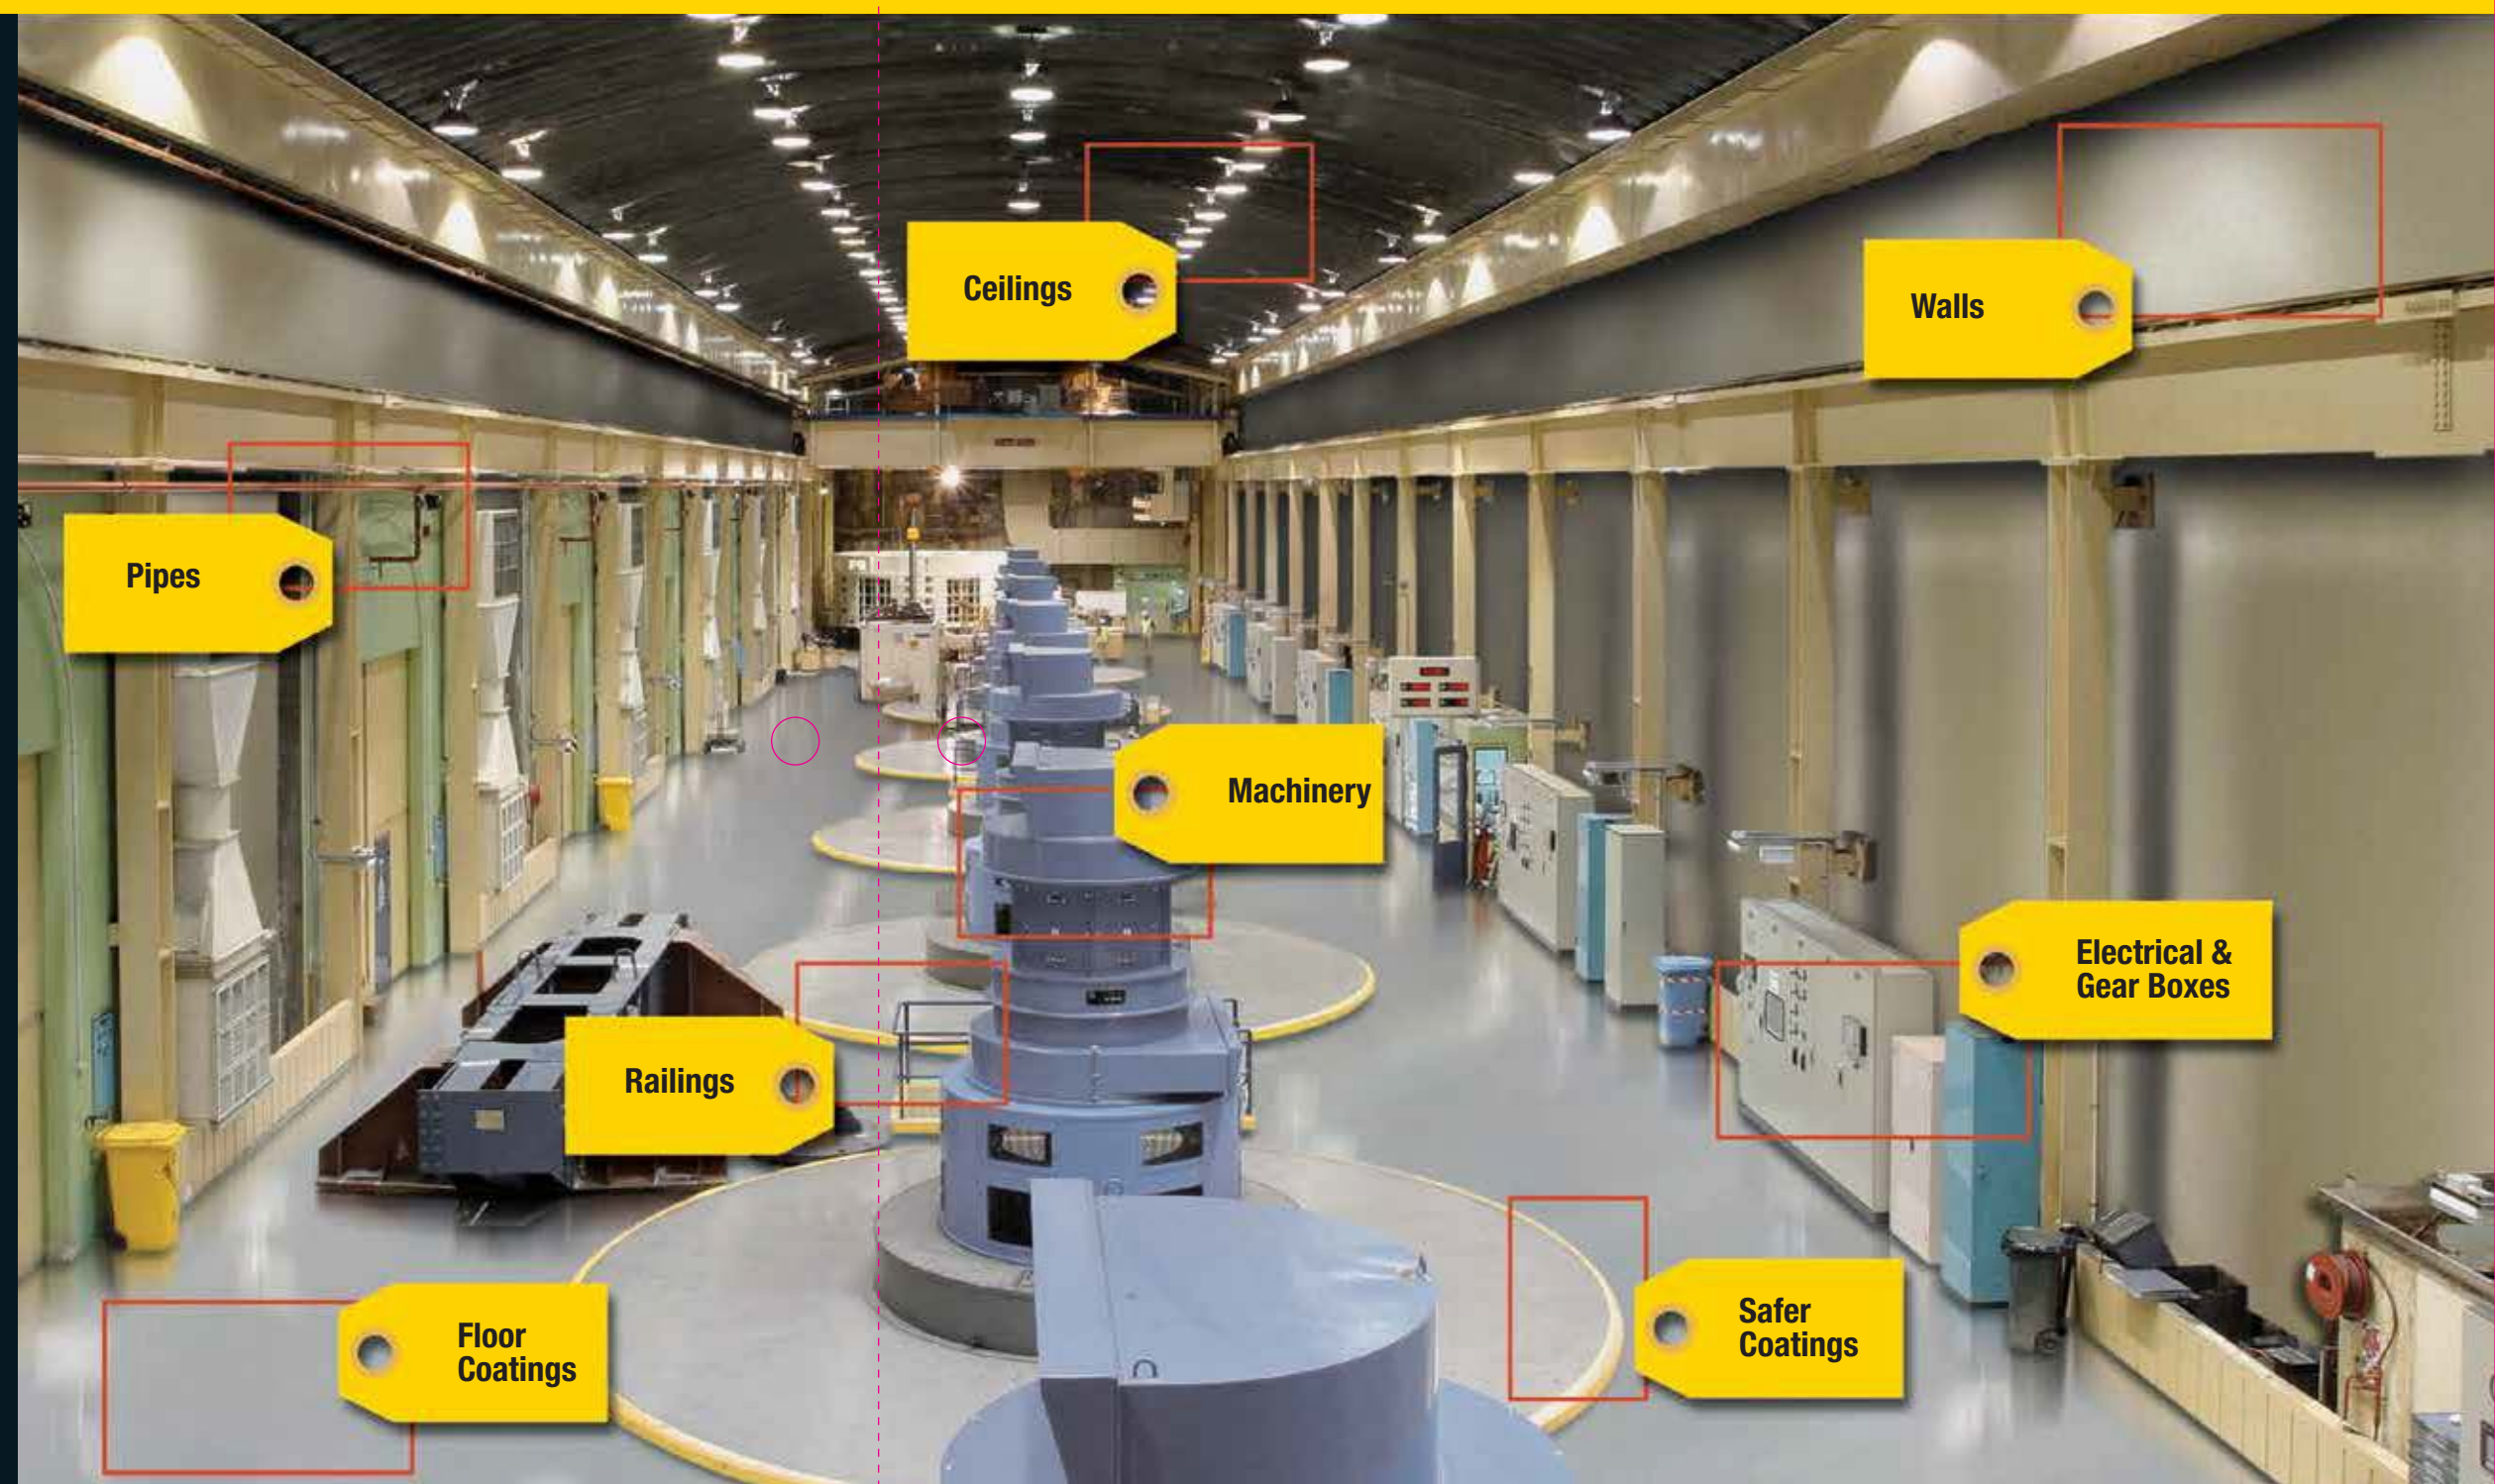

QUALITY PRODUCTS ARE JUST THE BEGINNING

Since 1921...

Rust-Oleum Corporation was founded on the principle of producing the highest quality labour saving coatings; and for nearly 100 years, Rust-Oleum has been the trusted name for superior solutions that promises long-lasting protection and superior coverage. Today, Rust-Oleum Corporation, backed by the resources of its parent company, RPM International Inc., is a worldwide leader in protective paints, coatings and value added products for both the home and industry.

Products That Work As Hard As You Do®

Rust-Oleum Industrial Brands is dedicated specifically to meeting the diverse needs of the industrial and commercial markets and provide solutions to problems caused by rust, heat, abrasion, chemicals and corrosive environments. This Product Guide showcases our distinct brands of protective paints, floor coatings and cleaners.



Products accompanied by this symbol carry a **TWO-YEAR RUST-PROOF GUARANTEE with maximum corrosion protection.**

• TRUSTED QUALITY SINCE 1921 •

RUST-OLEUM®

INDUSTRIAL COATINGS

HIGH PERFORMANCE

The ultimate protection for industrial environments. Formulated with the highest quality pigments and resins, the High Performance brand of coatings has the highest paint solids in the industry. These proprietary formulations are designed for severe industrial environments and are backed by a Rust-Proof Guarantee. The High Performance brand is the foundation of Rust-Oleum Corporation.

STRIPING & MARKING PAINT

Rust-Oleum offers a vast assortment of striping and marking paints for any job. From precision markings for utility locating or bold markings for a construction job, our marking paint selection is the most complete in the industry. When it comes to striping parking lots, athletic fields or walkways, our collection of trusted striping paints go the distance with long-lasting results you can count on every time.

COMMERCIAL

Don't let rust ruin your reputation. Sometimes looks are everything. Protect your company's assets with Rust-Oleum Commercial Coatings. Rust-Oleum Commercial Coatings are the perfect solution for all types of commercial environments. From light duty to the most demanding, Rust-Oleum coatings provide long-lasting rust protection, a professional, high gloss finish and no sags, drips or runs. For that first impression and lasting reputation, demand the durability of Rust-Oleum Commercial Coatings.

SIERRA PERFORMANCE COATINGS

The only industrial strength epoxies and acrylics that have little solvent odour, low VOCs or hazardous air pollutants. These coatings dry fast and contain low solvents, letting you paint wherever you want, whenever you want. Sierra Performance coatings are ideal for mild to moderate industrial environments. Offered to you by Rust-Oleum, you can trust that they are also durable as they are safe.

CONCRETE PREP, PATCH & REPAIR

Rust-Oleum's expertise in surface protection doesn't stop at metal. Our complete selection of concrete prep, patch and repair products are formulated to deliver contractor-grade protection and are easy to apply using in-house maintenance crews. Our concrete repair products cure fast to minimize downtime and provide lasting durability for long-term protection.

FLOOR COATINGS

Rust-Oleum's diverse product offering provides a cost effective, durable solution for every industry and every environment. Our range of products include Concrete Saver and Sierra Performance brands for application using in-house crews, to Concrete Protection Systems coatings and toppings for professional contractors. Whatever the floor coating project, Rust-Oleum has the right solution for you.

ROOFING

Rust-Oleum LeakSeal has innovated quality products that repair and beautify commercial and residential spaces. Rust-Oleum LeakSeal is proud to introduce its new roofing program complete with Roof Coatings, Patch & Repair, and Cleaners for commercial and residential roofs. Use on low and steep slope roofs, including commercial and residential properties, RVs, campers, porch awnings, barns, sheds & more.

DRIVEWAY

For high-performance coatings that excel on the most demanding surfaces — with one coat coverage and outstanding durability — look to Rust-Oleum®, the #1 trusted brand for protection.

JAN/SAN



Rust-Oleum manufactures a diverse arsenal of cost-effective and high-performance products for all cleaning needs. The Rust-Oleum product range includes Cleaners and Degreasers, Mould Remediation, Disinfectants, Rust Removers, Drain, Septic and more. Whatever the cleaning challenge, Rust-Oleum has the right solution for your janitorial and sanitation needs.

PRIMERS

Rust-Oleum Primers have a solution for every problem. From mould and mildew, to stains and protection, our wide range of high-performance Primers makes it easy to resolve common issues. Professional quality, fast-drying formulas make problem solving simple.

MIRACLE SEALANTS®

The leader in professional-grade care and maintenance products for tile, grout, natural stone, brick and masonry surfaces. Premium-quality products rated #1 in performance and quality.

WOODCARE

Rust-Oleum's diverse products are cost effective, durable and provide protection to any project. The unique formulas for interior and exterior wood projects and floor finishes outperform the competition for scratch and stain resistance. In addition, they provide the best protection for heavy foot traffic and weather durability. Varathane products offer a quality finish and superior protection — so don't just finish it, Varathane it!

PRODUCT GUIDE CONTENTS

HIGH PERFORMANCE		9
SYSTEM	DESCRIPTION	PAGE
V2100 System	Rust-Preventive Enamel	10
V7400 System	DTM Alkyd Enamel	11
3800 System	DTM Acrylic Enamel	12
3100 System	Speedy-Dry DTM Acrylic Enamel	13
Noxyde®	Heavy-Duty Elastomeric Acrylic Coating	13
9100 System	DTM Epoxy Mastic	14
9200 System	Low Temperature Epoxy	15
C9578 System	Coal Tar Epoxy	16
5300 System	Water-Based Epoxy	16
9800 System	DTM Urethane Mastic	17
9700 System	Acrylic Polyester Urethane	17
V2100 System	Galvanizing Compound	18
V2100 System	Rust Reformer	18
Steel-Tech™	Stainless Steel Coating	19
High Heat	High Heat Coatings	20
5100 System	Acrylic Dryfall Coating	21
7000 System	Cold Galvanizing Compound	21
V8400 System	Food & Beverage Alkyd Enamel	22
Pool and Fountain Paint	Acrylic Pool and Fountain Paint	22
Pool and Fountain Paint	Epoxy Pool and Fountain Paint	23
Meta Prime	Meta Prime Epoxy Primer	23
Thinners	150 Xylene Thinner	24
Thinners	160 Epoxy Thinner	24
Thinners	190 Urethane Thinner	24
Thinners	633 Mineral Spirits Thinner	24
Thinners	641 Naphtha Thinner	25
Thinners	165 Water Immersion Thinner	25
Thinners	140 High Heat Thinner	25
Thinners	Compliant Thinner	25
Technical Data		26-27

STRIPING & MARKING PAINT		29
SYSTEM	DESCRIPTION	PAGE
M1600/M1800 System	Precision Line Inverted Marking Paint	30
M1400 System	Construction Marking Paint	31
V2300 System	Inverted Marking Paint	31
M1900 System	360° Marking Paint	32
MC1800 System	Precision Line Inverted Marking Chalk	32
2300 System	Inverted Striping Paint	33
2300 System	Traffic Zone Striping Paint	33
S1600 System	Inverted Striping Paint	33
AF1600 System	Athletic Field Inverted Striping Paint	34
Striping & Marking	Companion Products	34

COMMERCIAL		37
SYSTEM	DESCRIPTION	PAGE
1600 System	Multi-Purpose Enamel	38
6100 System	Shop Coat Primer	38
Alkyd Primer	Universal Alkyd Primer	39
C740 System	DTM Alkyd Enamel	39
Acrylic Primer	Universal Acrylic Primer	40
5200 System	DTM Acrylic	41
3300 System	Acrylic Aliphatic Urethane	42
RB1600 System	Green Rebar Epoxy	44
AS2100 System	Anti-Slip Aerosol	44
1600 System	Galvanizing Compound	44
LeakSeal™	Flexible Rubber Sealant	45

SIERRA PERFORMANCE		47
SYSTEM	DESCRIPTION	PAGE
Sierra	Acrylic Primer	48
Beyond™	Acrylic Enamel	48
MetalMax®	DTM Acrylic Enamel	49
S70 System	Water-Based Epoxy Primer	50
S60 System	Water-Based Epoxy Maintenance Coating	50

CONCRETE PREP, PATCH & REPAIR		53
SYSTEM	DESCRIPTION	PAGE
TurboKrete®	Concrete Patching Compound	54
TurboKrete®	All-Purpose Epoxy Repair	54
Joint Sealant	Flexible Joint Sealant	54
5499 System	Concrete Patching Compound	55
InstaPatch®	Concrete Repair System	55
Putty Patch™	Cement-Based Patching	55
Pourable Patch	Pourable Concrete Patching Compound	56
108 System	Cleaning & Etching Solution	56
S6511 System	Penetrating Prime & Seal Primer	56
ECO Prime™	Fast-Curing Polyurea Primer	57
Hard Surface Primer	Water-Based Epoxy Primer	57
RockSolid®	Moisture Stop™	58
Rust-Oleum®	Garage & Interior Floor Primer	58
Vapour Barrier	Water-Based Topside	59
Vapour Barrier	100% Solids Topside	59

FLOOR COATINGS		61
SYSTEM	DESCRIPTION	PAGE
5600 System	Acrylic Urethane Floor Paint	62
6000 System	Water-Based Epoxy	62
9100 System	Dtm Epoxy Mastic	63
6200 System	Fast-Cure Epoxy Floor Coating	64
6600 System	Heavy Duty Maintenance Floor Coating	64
6500 System	High Traffic Floor Coating	65
6700 System	Extended Pot Life Epoxy	65
5500 System	Acrylic Dustproof Floor Sealer	66
6711 System	Clear Water-Based Polyurethane	66
EasyClear®	Epoxy Maintenance Floor Coating	66
AS5600 System	Anti-Slip Floor And Deck Coating	67
AS5400 System	Anti-Slip One-Step Epoxy	67
AS6000 System	Anti-Slip Low Profile Epoxy	68
AS9100 System	Anti-Slip High Performance Epoxy	68
AS6500 System	Anti-Slip 100% Solids Epoxy	69
SafeStep®	Step Covers	69
SafeStep®	Step Edge	70
SafeStep®	Sheeting	70
FastKote®	Polyurea Floor Coating	71
FastKote®	Uv Stable Polyurea Floor Coating	71
MEDICI®	Decorative Polyurea Floor Coating	72
FinishKote 80	High Solids Polyaspartic Floor Coating	72
FinishKote 100	High Solids Polyaspartic Floor Coating	73
BuildKote	Polyurea Floor Coating Primer	73
Heavy Metal	Decorative Floor Coating	74
200 Anti-Skid	Floor Coating Additive	74
Ultrawear®	Additive	74
Durability Additive	Durability, Longevity & Anti-Slip	74
Decorative Vinyl Chips	Decorative Finish	74
Rust-Oleum Mixers & Rollers	Mixers & Rollers	74
Technical Data		75

ROOFING		77
SYSTEM	DESCRIPTION	PAGE
LeakSeal®	Universal Roof Primer	78
LeakSeal®	Water-Based Primer	78
LeakSeal®	Ultimate Wet Patch	79
LeakSeal®	Clear Roof Patch	79
LeakSeal®	Roof Repair Wet/Dry	80
LeakSeal®	Roof Repair All Season	80
LeakSeal®	Gutter & Siding Sealant	80
LeakSeal®	Roof Patch Fabric Mesh	81
LeakSeal®	Aluminum Roof Coating - 15 Year	82
LeakSeal®	Aluminum Roof Coating - 7 Year	82
LeakSeal®	Elastomeric Roof Coating - 17 Year	82
LeakSeal®	Elastomeric Roof Coat - 7 Year	83
LeakSeal®	Fibered Roof Coating	83
LeakSeal®	Roof And Foundation Coating	83
LeakSeal®	Foundation Membrane	84
LeakSeal®	Waterproofing Sealant	84
LeakSeal®	Foundation Membrane	85
LeakSeal®	Waterproofing Liquid Membrane	85

DRIVEWAY		87
SYSTEM	DESCRIPTION	PAGE
Epoxyshield®	Ultimate Driveway Crack Filler	88
Epoxyshield®	Premium Crack Filler	88
Epoxyshield®	Asphalt Pothole Filler	89
Epoxyshield®	Driveway Sealer Plus 3x	89

JANITORIAL/SANITATION		91
SYSTEM	DESCRIPTION	PAGE
Concrobium®	Mold Control®	92
Concrobium®	Mold Stain Remover – 2 Part	92
Concrobium®	Mold Stain Remover	93
Concrobium®	Fogger	93
Concrobium®	Fogger Intake Filter	93
Moldex®	Mold Killer	94
Moldex®	Instant Mold & Mildew Stain Remover	94
Moldex®	Mold & Mildew Non-Bleach Stain Remover	95
Moldex®	Protectant	95
Krud Kutter®	Mould & Mildew Stain Remover	95
Krud Kutter®	Original Cleaner Degreaser	96
Krud Kutter®	Heavy Duty Cleaner/Degreaser Wipes	96
Mean Green®	Super Strength	97
Mean Green®	Industrial Strength	97
Mean Green®	Orange Champ	97
Concrobium®	Broad Spectrum Disinfectant II	98
Concrobium®	Calcium, Lime & Rust Remover	99
Krud Kutter®	The Must For Rust	99
Krud Kutter®	The Must For Rust Remover Gel	99
Krud Kutter®	Calcium, Lime & Rust Stain Remover	100
Whink®	Rust Stain Remover	100
Whink®	Lime & Rust Remover	100
Whink®	Rustguard®	101
Rust-Oleum®	Rust Dissolver Jelly	101
Whink®	Hair Clog Blaster!®	102
Roto-Rooter®	Gel Clog Remover	102
Whink®	Septic Treatment	102
Concrobium®	Odor & Moisture Control Desiccant Packs	103
Concrobium®	Odor Eliminator	104
Concrobium®	Carpet Shampoo	104
Moldex®	Paint Prep	104
Krud Kutter®	Ultra Power Remover	105
Krud Kutter®	Graffiti Remover	105
Krud Kutter®	Oil Grabber® Stain Remover	105

PRIMERS		107
SYSTEM	DESCRIPTION	PAGE
Zinsser® Bulls Eye 1-2-3®	Water-Based Primer-Sealer - White	108
Zinsser® Bulls Eye 1-2-3®	Water-Based Primer-Sealer - Grey	108
Zinsser® Bulls Eye 1-2-3®	Water-Based Primer-Sealer - Deep Tint	108
Zinsser® Mould Stop	Water-Based Primer - White	109
Zinsser® Odour Killing	Water-Based Primer-Sealer - Clear	109
Zinsser® Bulls Eye	Water-Based Primer-Sealer	109
Zinsser® Bulls Eye Zero™	Water-Based Primer	110
Zinsser® B-I-N®	Shellac Base Primer-Sealer	110
Zinsser® B-I-N® Advanced	Synthetic Shellac	110
Zinsser® B-I-N® 2	Alkyd Primer-Sealer	111
Zinsser® Cover Stain®	Oil-Based Primer-Sealer	111
Zinsser® Odorless	Oil-Based Primer-Sealer	111
Zinsser® Bondz®	Urethane-Acrylic Maximum Adhesion Primer	112
Zinsser® Gardz®	Problem Surface Sealer	112
Zinsser® Vinyl & Plastic	Bonding Primer	112
Zinsser® Peel Stop® Plus	High Build Binding Primer	113
Zinsser® Perma-White®	Mould & Mildew-Proof™ Water-Based Interior Paint	113
Zinsser® Ceiling Paint	Water-Based Stain-Blocker	114
Zinsser® MH Ready Patch™	Professional Spackling & Patching Compound	114
Zinsser® Watertite®	Mould & Mildew-Proof® Waterproofing Paint	115
Zinsser® Watertite® LX	Mould & Mildew-Proof® Latex Waterproofing Paint	115
Zinsser® Watertite®	Flexible Primer & Finish	116
Zinsser® Watertite®	Etch & Cleaner for Concrete & Masonry	116
Zinsser® Watertite®	Hydraulic Cement for Concrete & Masonry	117
Zinsser® Watertite®	Polyurethane Sealant for Concrete & Masonry	117
X-I-M®	Advanced® Technology Uma® Brand	118
X-I-M®	Peel Bond®	118
EnviroSHIELD™	Mold Resistant Coating	120
EnviroSHIELD™	Waterless Masonry Cleaner	120
EnviroSHIELD™	Odour & Smoke Blocker	121
EnviroSHIELD™	Odour & Stain Blocker	121
EnviroSHIELD™ Shellac 9000	Primer Sealer Stain & Odour Blocker	122
EnviroSHIELD™ Masonry 3000	Waterproof Latex Coating	122
EnviroSHIELD™ Oil-Based 7000	Primer Stain & Odour Sealer	123

MIRACLE SEALANTS®		125
SYSTEM	DESCRIPTION	PAGE
Miracle Sealants® 511	Impregnator Sealer	126
Miracle Sealants® 511	Porous Plus Sealer	126
Miracle Sealants® 511	H20 Plus Sealer	126
Miracle Sealants® 511	Quartz Countertop Sealer	127
Miracle Sealants® 511	Glass Tile & Shower Door Sealer	127
Miracle Sealants® 511	Tile, Stone & Grout Sealer	127
Miracle Sealants® 511	Grout Sealer Aerosol	128
Miracle Sealants®	Grout Sealer	128
Miracle Sealants®	Grout Shield Sealer	128
Miracle Sealants®	Stone Polish	129
Miracle Sealants®	Seal & Enhance	129
Miracle Sealants® 511	Kleen & Reseal	130
Miracle Sealants®	Heavy Duty Acidic Cleaner	130
Miracle Sealants®	Phosphoric Acid Cleaner	130
Miracle Sealants®	Tile & Stone Cleaner	131
Miracle Sealants®	Limestone & Travertine Stone Soap	131
Miracle Sealants®	Poultice Plus Powder Mix	131
Miracle Sealants®	Liquid Poultice (2-Part)	132
Miracle Sealants®	Water Ring & Etch Remover	132
Miracle Sealants®	Levolution Tools	133
Miracle Sealants®	Mira Brush Applicator	133

WOODCARE		135
SYSTEM	DESCRIPTION	PAGE
Varathane® Profinisher	Clear Finish Interior (Oil-Based)	136
Varathane® Bar & Table Finish	Interior Pour On Finish Epoxy	136

INDUSTRIAL COATINGS SELECTION GUIDE

METAL/STEEL APPLICATIONS					
FEATURES		RECOMMENDED PRODUCT	PAGE	PRIMER	SURFACE PREPARATION*
SEVERE	Direct-To-Metal; high build; excellent adhesion and hiding; low temp. cure; ultimate protection of metal.	9800 System – DTM Urethane Mastic	17	Self-priming	SP1+SP3
	Thin film; ultimate colour and gloss retention; extremely durable against abrasion; low temp. cure.	9700 System – 250 VOC Acrylic Polyester Urethane	17	V9100 System – Low VOC DTM Epoxy Mastic	SP1+SP3
	Direct-To-Metal; superior long-term solvent, chemical and abrasion resistance; maximum corrosion protection.	9100 System – DTM Epoxy Mastic	14	Self-priming	SP1+SP3
	Low odour; applies to damp surfaces; excellent resistance to chemicals, abrasion and corrosion; high gloss finish.	5300 System – Water-Based Epoxy	16	5300 System – Water-Based Epoxy Primer	Mod.: SP1+SP3 Sev.: SP1+SP6
MODERATE	Low VOC, low HAPs, low solvent-odour; excellent corrosion, chemical and stain resistance	S60 System – Water-Based Epoxy Maintenance Coating	50	S70 System – Water-Based Epoxy Primer	Mod.: SP1+SP3 Sev.: SP1+SP6
	A single-component, high-build, water-based acrylic elastomeric suitable for use with only minimal surface preparation.	Noxyde®	13	Self-priming	SP1+ SP3 or WJ-4 5KPSI
	Direct-To-Metal; superior resistance to blistering and water spotting; applies in low temp./high humidity.	3800 System – DTM Acrylic Enamel	12	3800 System – DTM Acrylic Enamel Primer or self-priming	SP1+SP3
	Low solvent odour, low VOC, low HAP; Direct-To-Metal; high performance; corrosion & humidity resistant.	MetalMax® DTM Acrylic Urethane	49	Self-priming, or S70 Epoxy Primer in extreme situations	SP1+SP3
MILD	VOC <340 g/l; protects metal from rust and corrosion; superior colour and gloss retention; excellent hiding.	V7400 System – 340 VOC DTM Alkyd Enamel	11	V7400 System – 340 VOC Alkyd Enamel Primer or self-priming	SP1+SP3
	Low solvent odour, low VOC, low HAP; attractive and durable; extremely versatile topcoat; interior or exterior use.	Beyond™ Multi-Purpose Acrylic Enamel	48	MetalMax® Primer DTM Acrylic Urethane	SP1+SP3
	Resists corrosion, mould, mildew and repeated washing, disinfectants and cleaning compounds.	8400 & V8400 System – Food & Beverage Alkyd Enamel	22	V8400 System – Food & Beverage Alkyd Enamel Primer	SP1+SP3
	Direct-To-Metal; low odour; withstands mild chemical fumes and spills.	5200 System – DTM Acrylic	41	5200 System – DTM Acrylic Primer	SP1+SP3
	VOC <100 g/l; good hiding and smooth coverage; withstands mild chemical fumes and spills.	C740 System – 100 VOC DTM Alkyd Enamel	39	CV740 System – 100 VOC Alkyd Enamel Primer or self-priming	SP1+SP3

GALVANIZED/ALUMINUM APPLICATIONS					
FEATURES		RECOMMENDED PRODUCT	PAGE	PRIMER	SURFACE PREPARATION*
SEVERE	Thin film; ultimate colour and gloss retention; extremely durable against abrasion; low temp. cure.	9700 System – 250 VOC Acrylic Polyester Urethane	17	V9100 System – Low VOC DTM Epoxy Mastic	SP1+SP3
	Low odour; applies to damp surfaces; excellent resistance to chemicals, abrasion and corrosion; high gloss finish.	5300 System – Water-Based Epoxy	16	5300 System – Water-Based Epoxy Primer	SP1+SP3
MODERATE	Direct-To-Metal; superior resistance to blistering and water spotting; applies in low temp./high humidity.	3800 System – DTM Acrylic Enamel	12	3800 System – DTM Acrylic Enamel Primer	SP1+SP3
	Low solvent odour, low VOC, low HAP; Direct-To-Metal; high performance; corrosion & humidity resistant.	MetalMax® DTM Acrylic Enamel	49	Self-priming, or S70 Epoxy Primer in extreme situations	SP1+SP3
	Low solvent odour, low VOC, low HAP; attractive and durable; extremely versatile product; interior or exterior use.	Beyond™ Acrylic Enamel	48	MetalMax® Primer	SP1+SP3
	Good hiding and smooth coverage; withstands mild chemical fumes and spills.	C740 System – 100 VOC DTM Alkyd Enamel	39	5200 System – DTM Acrylic Primer	SP1+SP3
MILD	Direct-To-Metal; low odour; withstands mild chemical fumes and spills.	5200 System – DTM Acrylic	41	5200 System – DTM Acrylic Primer	SP1+SP3
	95% pure zinc in dry film; maximum corrosion resistance; excellent adhesion.	7000 System – Cold Galvanizing Compound	21	Self-priming	SP1+SP3

CONCRETE/MASONRY APPLICATIONS					
SEVERE	SEE CONCRETE PROTECTION SYSTEMS STARTING ON PAGE 61.				
	High build; excellent adhesion and hiding; low temp. cure.	9800 System – DTM Urethane Mastic	17	9100 System DTM Epoxy Mastic	Chemical clean or abrasive blast
	Superior long-term solvent, chemical and abrasion resistance.	9100 System – DTM Epoxy Mastic	14	Self-priming	Chemical clean or abrasive blast
	No solvent odour, zero VOC, zero HAP; excellent corrosion, chemical and stain resistance.	S60 System – Epoxy Maintenance Coating	50	Self-priming	Chemical clean or abrasive blast
	Low odour; applies to damp surfaces; excellent resistance to chemicals and abrasion; high gloss finish.	5300 System – Water-Based Epoxy	16	Self-priming	Chemical clean or abrasive blast
	Resists blistering; low temp./high humidity application.	3800 System – DTM Acrylic Enamel	12	Self-priming	Chemical clean
	Low odour; withstands mild chemical fumes.	5200 System – DTM Acrylic	41	Self-priming	Chemical and hand tool or power tool clean

* Minimum surface preparation required.

See Technical Data Sheets for detailed product information.

MILD ENVIRONMENTS	MODERATE ENVIRONMENTS	SEVERE ENVIRONMENTS
Outdoor weathering, mild industrial fumes and normal humidity with mould and mildew conditions.	Frequent fumes and spills of mild chemicals, occasional product spills, occasional chemical cleaning. Intermittent high humidity, moisture, mould and mildew conditions.	Frequent fumes and spills of strong chemicals (acids, alkalis and solvents), high humidity and moisture conditions. Frequent product spills and frequent chemical cleaning.

FLOORING APPLICATIONS					
FEATURES		RECOMMENDED PRODUCT	PAGE	PRIMER	SURFACE PREPARATION*
CONCRETE					
SEVERE	SEE CONCRETE PROTECTION SYSTEMS STARTING ON PAGE 61.				
	2-3 times tougher than concrete; superior abrasion, impact and chemical resistance.	6700 System – Extended Pot Life Epoxy	65	Self-priming or S6511 Penetrating Prime & Seal™ Primer	Chemical clean and abrasive blast or acid etch
	Superior long-term solvent, chemical and abrasion resistance; resists light to moderate wheeled traffic.	FastKote® – Polyurea Floor Coating	71	Build Kote Self-priming or Polyurea Floor Coating Primer	Chemical clean and abrasive blast or acid etch
	2-3 times tougher than concrete; superior abrasion, impact and chemical resistance.	FastKote® UV – UV Stable Polyurea Floor Coating	71	Self-priming or VS6511 Penetrating Prime & Seal™ Primer	Chemical clean and abrasive blast or acid etch
	Superior long-term solvent, chemical and abrasion resistance; resists light to moderate wheeled traffic.	9100 System – DTM Epoxy Mastic	63	Self-priming	Chemical clean and abrasive blast or acid etch
	Resists heavy foot traffic and lightweight rubber tire vehicle traffic; withstands intermittent mild chemical spills.	6000 System – Water-Based Epoxy	62	Self-priming	Chemical clean and abrasive blast or acid etch
	For interior/exterior concrete and wood floors; protects against light traffic, weather and staining.	6711 System – Clear Water-Based Polyurethane	66	Self-priming	Chemical clean and abrasive blast or acid etch
	For interior concrete floors. Protects new or old concrete or previously coated floors.	EasyClear® – Epoxy Maintenance Floor Coating	66	Self-priming	Chemical clean and abrasive blast or acid etch
	Low odour, resists lightweight rubber wheel traffic, mild stains, mildew and eliminates dusting.	5600 System – Acrylic Urethane Floor Paint	62	Self-priming	Clean/degrease and hand tool or power tool clean
	Low odour, UV resistant, satin finish; resists light traffic, mild stains and eliminates dusting.	5500 System – Acrylic Dustproof Floor Sealer	66	Self-priming	Clean/degrease and hand tool or power tool clean
STEEL DECK					
SEV.	Direct-To-Metal; superior long-term solvent, chemical and abrasion resistance; maximum corrosion protection.	9100 System – DTM Epoxy Mastic	63	Self-priming	SP1+SP3
ANTI-SLIP					
SEVERE	For continuous vehicle and equipment traffic; strong chemical exposure.	AS6500 System – Anti-Slip 100% Solids Epoxy	69	Self-priming	SP1 and abrasive blast or acid etch
	For heavy vehicle and equipment traffic; strong chemical exposure.	AS9100 System – Anti-Slip High Performance Epoxy	68	Self-priming	SP1 and abrasive blast or acid etch
	For heavy foot traffic and/or light vehicle traffic.	AS5400 System – Anti-Slip One-Step Epoxy	67	Self-priming	SP1 and abrasive blast or acid etch
	For barefoot and light recreational pedestrian traffic; low odour.	AS6000 System – Anti-Slip Low-Profile Epoxy	68	Self-priming	SP1 and abrasive blast or acid etch
	For mild industrial environments; fast dry, low odour	AS5600 System – Anti-Slip Low–Medium Profile Acrylic	67	Self-priming	SP1 and abrasive blast or acid etch

WATER-IMMERSION ENVIRONMENTS					
SEVERE	Apply above 15°C (60°F). Not recommended for potable water tanks. Use with 9102402.	9100 System – DTM Epoxy Mastic	14	Self-priming	SP1+SP10
	Protects against severe abrasion, strong chemicals and non-potable water immersion.	C9578 System – Coal Tar Epoxy	16	Self-priming	SP1+SP10
	Tank of 3,000 gallons minimum.	9200 System – for Potable Water	15	Self-priming	SP1+SP10

WALLS, DOORWAYS, TRIM					
MODERATE	No solvent odour, zero VOC, zero HAP; high durability epoxy for use in extreme areas.	S60 System – Epoxy Maintenance Coating	50	Sierra Acrylic Primer	SP1+SP3
	No solvent odour, zero VOC, zero HAP; attractive; durable; extremely versatile; interior or exterior use.	Beyond™ Acrylic Enamel	48	Self-priming or Sierra Acrylic Primer	SP1+SP3

* Minimum surface preparation required.

INDUSTRIAL COATINGS CHEMICAL & CORROSION RESISTANCE

● EXCELLENT RESISTANCE

The colour and film integrity of the coating is generally unaffected by exposure to this condition. Colour and gloss may be slightly affected with longer exposure; however, long-term protection can be expected.

▲ GOOD RESISTANCE

The film integrity of the coating is generally unaffected by exposure to this condition. Colour and gloss may be slightly affected with longer exposure; however, long-term protection can be expected.

◆ FAIR RESISTANCE

The film integrity of the coating is generally unaffected by exposure to this condition, however colour and gloss will be affected with longer exposure.

■ NOT RECOMMENDED

Film integrity and colour are affected by exposure to this condition, greatly reducing protection.

CHEMICAL & CORROSION RESISTANCE GUIDE																				
This chart represents the general chemical resistance of Rust-Oleum finish coats. For more details, call the Rust-Oleum Technical Service Department at 847-816-2248.	CORROSIVE CONDITIONS						FUMES, SPILLAGE & SPRAYS											IMMERSION CONTINUOUS WET HEAT RESISTANCE 125°F (52°C)		
	GENERAL WEATHERING	INDUSTRIAL FUMES	SALT ATMOSPHERE	MOULD, MILDEW, FUNGUS	LIGHT-MODERATE ABRASION	HEAVY ABRASION	DRY HEAT	WATER	SALT & BRINES	MILD ALKALI, SOAPS & DETERGENTS	STRONG ALKALI & CAUSTICS	MILD, DILUTE ACIDS	STRONG, CONCENTRATED ACIDS	FOOD ACIDS	GREASES, OILS & FATS	GASOLINE & SOLVENTS	CUTTING OILS, COOLANT & HYDRAULIC FLUID	FRESH WATER	SALT WATER & BRINE	SEWAGE
HIGH PERFORMANCE																				
V7400 System – DTM 340 VOC Alkyd Enamel	▲	●	●	■	▲	■	100°C 212°F	▲	▲	▲	■	▲	■	▲	●	▲	▲	■	■	■
V8400 System – Food & Beverage Alkyd Enamel	▲	●	●	●	▲	■	100°C 212°F	▲	▲	▲	■	▲	■	▲	●	▲	▲	■	■	■
V7400 System – 340 VOC DTM Alkyd Enamel ¹	▲	●	●	■	▲	■	100°C 212°F	▲	▲	▲	■	▲	■	▲	●	▲	▲	■	■	■
3800 System – DTM Acrylic Enamel	●	●	●	●	▲	■	93°C 200°F	▲	●	▲	■	▲	■	▲	●	■	▲	■	■	■
9100 System – DTM Epoxy Mastic	◆	●	●	●	●	●	149°C 300°F	●	●	●	●	●	●	▲	●	●	●	● ²	● ²	● ²
5300 System – Water-Based Epoxy	◆	●	●	●	●	▲	149°C 300°F	●	●	●	●	●	■	▲	●	●	●	■	■	■
C9578 System – Coal Tar Epoxy	◆	●	●	●	●	●	149°C 300°F	●	●	●	●	●	▲	●	●	●	●	●	●	●
9200 System – Potable low temp water coating	◆	●	●	●	●	●	149°C 300°F	●	●	●	●	●	▲	●	●	●	●	●	●	●
9700 System – 250 VOC Acrylic Polyester Urethane	●	●	●	●	●	●	149°C 300°F	●	●	●	●	●	●	●	●	●	▲	■	■	■
7000 System – Cold Galvanizing Compound	●	●	●	■	▲	■	177°C 350°F	▲	▲	▲	■	■	■	▲	●	▲	▲	■	■	■
INDUSTRIAL CHOICE®																				
5200 System – DTM Acrylic	●	▲	●	●	▲	■	93°C 200°F	▲	▲	▲	■	▲	■	▲	●	■	●	■	■	■

1 For high gloss finishes only. 2 Use with 9102402 Immersion Activator. 3 Long-term exposure to acids may cause some discoloration.

CHEMICAL & CORROSION RESISTANCE GUIDE																				
This chart represents the general chemical resistance of Rust-Oleum finish coats. For more details, call the Rust-Oleum Technical Service Department at 847-816-2248.	CORROSIVE CONDITIONS						FUMES, SPILLAGE & SPRAYS										IMMERSION CONTINUOUS WET HEAT RESISTANCE (52°C) 125°F			
	GENERAL WEATHERING	INDUSTRIAL FUMES	SALT ATMOSPHERE	MOLD, MILDEW, FUNGUS	LIGHT-MODERATE ABRASION	HEAVY ABRASION	DRY HEAT	WATER	SALT & BRINES	MILD ALKALI, SOAPS & DETERGENTS	STRONG ALKALI & CAUSTICS	MILD, DILUTE ACIDS	STRONG, CONCENTRATED ACIDS	FOOD ACIDS	GREASES, OILS & FATS	GASOLINE & SOLVENTS	CUTTING OILS, COOLANT & HYDRAULIC FLUID	FRESH WATER	SALT WATER & BRINE	SEWAGE
COMMERCIAL																				
CV740 System – 100 VOC DTM Alkyd Enamel	▲	●	●	■	▲	■	100°C 212°F	▲	▲	▲	■	▲	■	▲	●	▲	▲	■	■	■
MATHYS®																				
Noxyde®	●	●	●	●	●	▲	107°C 225°F	●	●	▲	◆	▲	▲	▲	◆	◆	◆	■	■	■
SIERRA PERFORMANCE™																				
Beyond™ Acrylic Enamel	●	●	●	●	●	■	—	▲	▲	●	■	▲	■	▲	▲	■	■	■	■	■
MetalMax® DTM Acrylic Enamel	●	●	●	●	●	■	—	●	●	●	▲	▲	▲	▲	▲	▲	▲	■	■	■
S60 System – Epoxy Maintenance Coating	▲	●	●	●	●	▲	—	●	●	●	▲	●	▲	●	●	▲	▲	■	■	■
CONCRETE SAVER®																				
AS6000 System – Anti-Slip Low-Profile Epoxy	◆	●	●	▲	●	●	—	●	●	●	●	●	■	●	▲	▲	▲	▲	■	■
AS5400 System – Anti-Slip One-Step Epoxy	▲	●	▲	▲	●	●	—	●	●	●	●	●	■	●	●	●	●	■	■	■
AS9100 System – Anti-Slip High Performance Epoxy	◆	●	●	▲	●	●	—	●	●	●	●	●	▲	▲	▲	▲	▲	■	■	■
AS6500 System – Anti-Slip 100% Solids Epoxy	◆	●	●	▲	●	●	—	●	●	●	●	●	▲	▲	▲	▲	▲	■	■	■
5500 System – Acrylic Dustproofer Floor Sealer	●	▲	●	●	▲	■	93°C 200°F	●	▲	▲	■	▲	■	◆	▲	■	■	■	■	■
5600 System – Acrylic Urethane Floor Paint	●	▲	●	●	▲	■	93°C 200°F	▲	▲	▲	■	▲	■	▲	●	■	◆	■	■	■
6000 System – Water-Based Epoxy	◆	●	●	▲	●	▲	—	●	●	●	●	●	■	●	●	●	●	■	■	■
EasyClear® – Epoxy Maintenance Floor Coating	◆	●	●	●	●	●	149°C 300°F	●	●	●	●	●	▲	●	●	●	●	▲	▲	▲
6500 System – 100% Solids Epoxy	▲	●	●	●	●	●	—	●	●	●	●	●	▲	●	●	●	●	■	■	■
6600 System – Heavy Duty Maint. Floor Coating	▲	●	●	●	●	●	—	●	●	●	●	●	▲	●	●	●	●	■	■	■
6700 System – Extended Pot Life Epoxy	▲	●	●	●	●	●	—	●	●	●	●	●	▲	●	●	●	●	■	■	■
6711 System – Clear Water-Based Polyurethane	▲	▲	▲	▲	●	■	—	●	●	●	▲	▲	▲	▲	●	▲	▲	■	■	■
TurboKrete® Concrete Patching Compound	▲	●	●	●	●	●	93°C 200°F	●	●	●	●	▲	◆	●	●	▲	●	●	●	▲

SAFETY COLOUR CODING & PIPE IDENTIFICATION GUIDES

SAFETY COLOUR CODING GUIDE		
Based on the original OSHA code.		
	EMERGENCY	Use RED for the identification of fire protection equipment and apparatus, danger and stop.
	WARNING	Use ORANGE for designating dangerous parts of machines or energized equipment which may cut, crush, shock, or otherwise injure, and to emphasize such hazards when enclosure doors are open or removed, or when gear, belt or other guards around moving equipment are open or removed, exposing unguarded hazards.
	CAUTION	Use YELLOW for designating caution and for marking physical hazards such as striking against, stumbling, falling, tripping and "caught in between". Solid yellow, and yellow with black stripes or checkers should be used interchangeably, using the combination which will attract the most attention in the particular area.
	SAFETY EQUIPMENT	Use GREEN or similar colour for designating safety and the location of First Aid equipment (other than firefighting equipment). Green background with a white cross is accepted as identifying First Aid equipment.
	SAFETY INFORMATION	Use BLUE for identification of safety information used on informational signs and bulletin boards. In railroad areas only, blue shall be the color for designating caution, limited to warning against the starting, the use of, or the movement of equipment under repair or being worked on.
	TRAFFIC/ HOUSEKEEPING	Use BLACK & WHITE to designate traffic and housekeeping markings. Solid white, solid black, single colour striping, alternate stripes of black and white or black and white checkers should be used in accordance with local conditions. (Purple, grey and brown may be used to accentuate colour contrast and make other colours more visible.)

IDENTIFICATION OF PIPING SYSTEMS		
Complies with the American National Standards Institute ANSI A13.1-1981 recommendations.		
	FIRE PROTECTION & SPRINKLER PIPING	RED is for ANSI Class F-FIRE. This classification includes sprinkler systems and other fire protection equipment.
	DANGEROUS MATERIALS	YELLOW is for ANSI Class D. This group includes materials which are hazardous to life or property because they are easily ignited, toxic, corrosive at high temperatures and pressures, produce poisonous gas or are themselves poisonous.
	SAFE MATERIALS	GREEN is for ANSI Class S. This group includes those materials involving little or no hazard to life or property in their handling.
	PROTECTIVE MATERIALS	BLUE is for ANSI Class P. This group includes materials which are piped through plants for the express purpose of being able to prevent or minimize the hazard of dangerous materials.



High Performance

Get ultimate protection in industrial environments with long-lasting, labour-saving coatings that provide generous coverage and ultra-durable results — plus the highest paint solids in the industry.



HIGH PERFORMANCE

ALKYD



- FOR USE ON:**
- Structural steel
 - Handrails
 - Piping & storage tanks
 - Equipment & machinery

V2100 SYSTEM
RUST-PREVENTIVE ENAMEL

The ultimate spray paint for industrial applications is Rust-Oleum High Performance V2100 System Rust Preventative Spray. This advanced formula provides the best-possible corrosion protection with easy, one-coat coverage and long-lasting colour, gloss and durability.

- **Tough, professional finish—superior resistance to chipping, cracking and peeling**
- High-output tip covers 50% faster; dries in only 20 minutes to touch
- Withstands heat to 93°C (200°F)
- Most colours match the 7400 or V7400 System for convenient touch-ups
- New any-angle spray can be sprayed in any direction, even upside down
- Accepted for use in federally registered Canadian food facilities; VOC-compliant nationwide

APPLICATION

SUBSTRATE

STEEL WOOD MASONRY

VOC g/l

COMPLIANT NATIONWIDE



COLOURS (425 g)

- V2170838 Almond
- V2171838 Tan
- V2175838 Chestnut Brown
- 209565 Anodized Bronze
- V2125838 Deep Blue
- V2123838 Light Blue
- V2137838 Dark Green
- V2134838 Bright Green
- V2138838 Hunter Green
- V2147838 Industrial Yellow
- V2164838 Bright Red
- V2187838 Dark Machine Grey
- V2184838 Dove Grey
- V2183838 Light Machine Grey
- V2188838 Smoke Grey
- V2115838 Silver Aluminum (396 g)
- V2119838 Stainless Steel (396 g)
- V2179838 Gloss Black
- V2177838 Semi-Gloss Black

COLOURS (425 g)

- V2178838 Flat Black
- V2192838 Gloss White
- 209567 Semi-Gloss White
- V2190838 Flat White
- V2196838 Fleet White
- V2102838 Crystal Clear (396 g)

SAFETY COLOURS (425 g)

- V2124838 Safety Blue
- V2133838 Safety Green
- V2155838 Safety Orange
- V2167838 Safety Purple
- V2163838 Safety Red
- V2143838 Safety Yellow

FLUORESCENTS (425 g)

- 2233838 Fluorescent Green
- 2255838 Fluorescent Orange
- 2264838 Fluorescent Red
- 2242838 Fluorescent Yellow

HAMMERED (425 g)

- 209590 Metal Black
- 209562 Metal Silver
- 209563 Metal Gold
- 209564 Metal Dark Bronze

EQUIPMENT (425 g)

- 209713 John Deere Green
- 209714 John Deere Yellow
- 209715 Caterpillar Yellow (old)
- 209716 Allis Chalmers Orange
- 209717 Int'l Harvester Red
- 209718 Ford Blue
- V2148838 Equipment Yellow
- V2156838 Equipment Orange

PRIMERS (425 g)

- V2169838 Red Primer
- V2182838 Grey Primer
- 209566 White Clean Metal Primer

COMPANION PRODUCTS

- 243546 Spray Grip
- 241526 Comfort Grip


HARD HAT



Since 1979 Hard Hat industrial aerosols have been the core and foundation of our industrial V2100 System aerosols. After moving away from Hard Hat branding in 2001, our iconic Hard Hat logo has officially returned to our family of Industrial Brands. With the implementation of our new branding across our brands, we wanted to bring back a piece of nostalgia by reinstating our flagship Hard Hat branding that started it all.

Spray Paints, Marking & Striping Paints

ALKYD

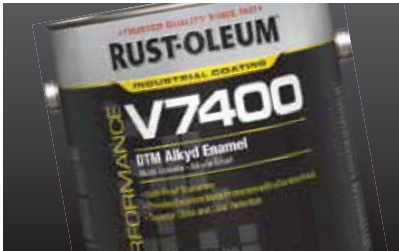

- FOR USE ON:**
- General plant maintenance
 - Machinery, equipment and structural steel
 - Pipes, metal cabinets and lockers
 - Railings, trim, doors and gates
 - Vents and outdoor signage
 - Water towers, agriculture and drilling
 - Coastal applications
 - Vehicle refinishing

V7400 SYSTEM
DTM ALKYD ENAMEL

Get outstanding protection and colour with the lower-VOC version of Rust-Oleum's original rust-preventative direct-to-metal (DTM) coating. Our High Performance V7400 System 340 VOC DTM Alkyd Enamel outperforms other brands in corrosion resistance and coverage.

- **High-gloss finish; one-coat coverage; dries tack-free in 2-4 hours**
- Resists chipping, fading, weathering
- Protects against mild chemicals — ideal for moderate to slightly severe industrial environments
- Two-year rust-proof guarantee — maximum corrosion protection
- Achieve maximum performance by starting with a 7400 System primer

APPLICATION

SUBSTRATE

STEEL WOOD

VOC g/l

VOC <340

Covers: 21.37-49.24 m²
(230-530 ft²) per 3.7 L



COLOURS (3.79 L)

- 245308 Almond
- 245382 Dunes Tan
- 245380 Chestnut Brown
- 245441 National Blue
- 245440 Marlin Blue
- 245487 Vista Green
- 245388 Forest Green
- 245482 Semi-Gloss Pleasant Green
- 245400 John Deere Green
- 245488 Yellow
- 245500 Old Caterpillar Yellow
- 245489 New Caterpillar Yellow
- 245408 International Orange
- 245385 Fire Hydrant Red
- 245486 Tile Red
- 245481 Semi-Gloss Light Neutral Grey
- 245409 Machine Tool Grey
- 245443 Navy Grey
- 245484 Silver Grey
- 245309 Aluminum *<500 g/l

COLOURS (18.9 L)

- 245386 Fire Hydrant Red
- 245401 John Deere Green
- 245405 High Gloss Black
- 245407 High Gloss White
- 245442 National Blue
- 245444 Navy Grey
- 245485 Silver Grey

- 245403 High Gloss Black
- 245387 Flat Black
- 245483 Semi-Gloss White
- 245533 Flat White
- 245406 High Gloss White
- 245381 Clear (Clear-Sele®)

SAFETY COLOURS (3.79 L)

- 245474 Safety Blue
- 245476 Safety Green
- 245477 Safety Orange
- 245478 Safety Red
- 245479 Safety Yellow

PRIMERS (3.79 L)

- V7086402 Grey Primer
- V769402 Red Primer
- 258887 White Primer
- 1060402 Grey
- 2082402 Light Grey
- 2068402 Red

SAFETY COLOURS (18.9 L)

- 245475 Safety Blue
- 245480 Safety Yellow

PRIMERS (18.9 L)

- V7086300 Grey Primer
- V769300 Red Primer

TINT BASES (HIGH-GLOSS) (3.79 L)

- 245515 High Gloss Red
- 245516 High Gloss Yellow
- 245517 High Gloss Masstone
- 245518 High Gloss Deep
- 245519 High Gloss Light

TINT BASES (SEMI-GLOSS) (3.79 L)

- 323815 Semi-Gloss Masstone
- 323809 Semi-Gloss Deep
- 323813 Semi-Gloss Light

TINT BASES (SATIN) (3.79 L)

- 323816 Satin Masstone
- 323810 Satin Deep
- 323814 Satin Light

ACRYLIC



FOR USE ON:

- Trim
- Structural steel
- Machinery
- Heavy equipment

3800 SYSTEM DTM ACRYLIC ENAMEL

Rust-Oleum 3800 System DTM Acrylic Enamel is a fast dry, water-based finish that contains less than 250 g/L VOC for indoor or outdoor direct-to-metal (DTM) applications. It delivers excellent corrosion resistance and will protect surfaces exposed to mild to moderate environments.

• Quick 15 minute dry time

- Excellent corrosion resistance
- Direct-to-metal (DTM) coating — no primer required; good adhesion and excellent one-coat coverage, including smooth surfaces
- 250 g/L VOCs, water-based
- Applies with very little brush drag; lays out evenly when applied by roller
- Two-year rust-proof guarantee — maximum corrosion protection

APPLICATION

SUBSTRATE

STEEL	GALVANIZED
CONCRETE	MASONRY

VOC g/l
VOC <250

Covers: 13.94-25.5 m²
(150-275 ft²) per 3.79 L



COLOURS (GLOSS) (3.79 L)

- | | |
|--|----------------------------------|
| | 314389 White |
| | 314388 Navy Grey |
| | 314387 Black |
| | 315506 Silver Grey |
| | 315509 Forest Green |
| | 315508 Dunes Tan |
| | 314592 Masstone Tint Base |
| | 314593 Deep Tint Base |
| | 314594 Light Tint Base |

SAFETY COLOURS (3.79 L)

- | | |
|--|-----------------------------|
| | 314209 Safety Blue |
| | 315510 Safety Orange |
| | 314410 Safety Red |
| | 314409 Safety Yellow |
| | 314407 Safety Green |

TINT BASES (SEMI-GLOSS) (3.55 L)

- | | |
|--|----------------------------------|
| | 324169 Masstone Tint Base |
| | 324168 Deep Tint Base |
| | 324167 Light Tint Base |

COLOURS (SATIN) (3.43 L)

- | | |
|--|----------------------------------|
| | 340651 Masstone Tint Base |
| | 340649 Deep Tint Base |
| | 340652 Light Tint Base |

ACRYLIC



FOR USE ON:

- Line equipment & machinery
- Forklifts & conveyors
- Light poles
- Misc. metal parts & vents

3100 SYSTEM SPEEDY-DRY DTM ACRYLIC ENAMEL

For projects that require minimal downtime, choose Rust-Oleum High Performance 3100 System Speedy-Dry DTM Acrylic Enamel. This water-based, high-gloss acrylic provides time-saving one-coat coverage and dries ultra-fast. Delivers long-lasting colour and gloss.

• Dries to the touch (tack-free) in just 15-60 minutes

- Direct-to-metal (DTM) coating — no primer required
- Protects against mild chemical spills, fumes, oil, corrosion, grease and abrasion
- Two-year rust-proof guarantee — maximum corrosion protection

COLOURS (3.79 L)

- | | |
|--|---------------------------|
| | 3171402 Dunes Tan |
| | 3165402 Red |
| | 3115402 Alumi-NON® |
| | 3179402 Black |
| | 3192402 White |

PRIMERS (3.79 L)

- | | |
|--|----------------------------|
| | 3181402 Grey Primer |
|--|----------------------------|

TINT BASES (3.79 L)

- | | |
|--|-------------------------|
| | 3107411 Masstone |
| | 3108418 Deep |
| | 3109397 Light |

SAFETY COLOURS (3.79 L)

- | | |
|--|------------------------------|
| | 3125402 Safety Blue |
| | 3144402 Safety Yellow |

APPLICATION

SUBSTRATE

STEEL	GALVANIZED
CONCRETE	MASONRY

VOC g/l
VOC <250

Covers: 18.58-32.51 m²
(200-350 ft²) per 3.79 L



NOXYDE®

For ultra-rugged protection in aggressive environments, choose Noxyde Elastomeric Acrylic Coating. This heavy-duty, water-based formula provides one-coat coverage and flexible durability on new or minimally prepared steel, metals and concrete.

• Resists corrosion, rust and water — even in severe marine environments¹; 10-year warranty²

- 200% elasticity — bridges small cracks, moves with structure, protects edges
- Performs like zinc/epoxy coatings without the need to abrasive-blast clean
- Single-component, self-priming, high-build; minimal surface prep required

COLOURS (18.9 L)

- | | | | |
|--|----------------------------|--|---------------------------|
| | 283092 English Red | | 283086 Blue Grey |
| | 283089 Reseda Green | | 283095 Gravel Grey |
| | 283093 Blue | | 283085 Off White |
| | 283097 Brown | | 283091 Black |
| | 283088 Beige Grey | | 283090 White |
| | 283094 Grey Green | | 329514 Silver Grey |

APPLICATION

SUBSTRATE

STEEL	GALVANIZED*
ALUMINUM*	RUSTED STEEL
CONCRETE	

VOC g/l
VOC <100
COMPLIANT NATIONWIDE

Covers: 10.22 m²
(110 ft²) per 3.78 L

*Must be primed

1 Certified by The Coatings Research Institute, Belgium, for corrosivity class C5-M High per ISO Standard 12944
2 Restrictions apply. Contact your Rust-Oleum representative for further information.

EPOXY



FOR USE ON:

- Steel beams, structural steel and towers
- Concrete floors and conveyors
- Industrial equipment and storage tanks
- Sewage treatment basins
- Non-potable water storage facilities
- Steel handrails

9100 SYSTEM DTM EPOXY MASTIC

This versatile epoxy coating quickly creates a tough, durable, protective surface. Just one coat of Rust-Oleum High Performance 9100 System DTM Epoxy Mastic is equal to multiple coats of competitive epoxy. Multiple activator options for unique applications.

• **Direct-to-metal (DTM) self priming formula—adheres to a variety of substrates**

- Superior long-term resistance to solvents, chemicals, abrasion and impact
- Convenient 1:1 mixing ratio — no measuring required
- Two-year rust-proof guarantee — maximum corrosion protection

STANDARD ACTIVATOR

- For air and surface temperatures of 10-38°C (50-100°F)

IMMERSION ACTIVATOR

- For fresh or salt water immersion of steel or concrete where water temperatures do not exceed 52°C (125°F)
- Great for use in floor coating applications
- Produces slightly lower gloss than standard activator
- Not for use in potable water tanks

LOW TEMPERATURE ACTIVATOR

- For air and surface temperatures of 5-15°C (40-60°F)

FAST-CURE ACTIVATOR

- Faster cure to minimize downtime
- Recoat in 4 hours at 21°C (70°F) and 50% RH
- For air and surface temperature of 10-38°C (50-100°F)
- Produces slightly lower gloss than standard activator

This is a two-component system. Order base and activator separately.

COLOURS (3.79 L)

- | | |
|---------|-------------|
| 9171402 | Dunes Tan |
| 9122402 | Marlin Blue |
| 9165402 | Regal Red |
| 9186402 | Navy Grey |
| 9182402 | Silver Grey |
| 9115402 | Aluminum |
| 9179402 | Black |
| 9192402 | White |

SAFETY COLOURS (3.79 L)

- | | |
|---------|--------------------------|
| 9125402 | Safety Blue |
| 9133402 | Safety Green |
| 9144402 | Safety Yellow |
| 204006 | Safety Red |
| 204005 | Safety Orange |
| 297081 | Safety Orange (5 gallon) |

TINT BASES (2.84 L)

- | | |
|---------|----------|
| 9105405 | Red |
| 9106405 | Yellow |
| 9107405 | Masstone |
| 9108421 | Deep |
| 9109408 | Light |

ACTIVATORS

- | | |
|----------|----------------------------|
| 205015 | Standard (<250 g/l) |
| 214430† | Immersion (<250 g/l) |
| 9103402 | Low Temp. (<250 g/l) |
| 214432 | Fast Cure (<250 g/l) |
| 331254 | Satin Activator (<250 g/l) |
| 9101402 | Standard (<340 g/l) |
| 9102402† | Immersion (<340 g/l) |
| 9104402† | Fast Cure (<340 g/l) |

† Not for use with Tint Bases

APPLICATION

SUBSTRATE

VOC g/l

VOC <340 9100

VOC <250 V9100

Covers: 11.62-20.9 m² (125-225 ft²) per 3.78 L



FOR USE ON:

- Offshore rigs
- Potable water tanks
- Dams
- Boats

9200 SYSTEM LOW TEMPERATURE EPOXY

Rust-Oleum 9200 System is a very versatile, low VOC and low HAPS, two component phenalkamine epoxy. It has excellent wetting characteristics, may be applied at low temperatures, is suitable for a variety of substrates and can tolerate damp surfaces. It dries fast and is compatible with many Rust-Oleum topcoats. The 9200 System is also suitable for water immersion service and is certified for use in potable water storage tanks that are in excess of 3,000 gallon capacity.

• **Low temperature cure for non-immersion service**

- Self priming DTM high build epoxy
- Excellent corrosion protection
- Excellent surface wetting
- Good early moisture resistance
- Extended recoat window for atmospheric exposures

COLOURS (15.14 L)

- | | |
|--------|----------------|
| 316834 | Grey |
| 316385 | White |
| 318207 | Blue |
| 320261 | Safety Yellow* |

ACTIVATORS

- | | |
|--------|-----------|
| 316836 | Activator |
|--------|-----------|

**NOTE: Safety Yellow is not approved for potable water use*

APPLICATION

SUBSTRATE

VOC g/l

VOC <250

Covers: 13-20.9 m² (140-225 ft²) per 3.7 L



EPOXY

EPOXY



FOR USE ON:

- Heavy-duty tanks
- Barges, sump and pipelines

C9578 SYSTEM COAL TAR EPOXY

Achieve maximum surface protection in severe industrial/ marine environments with Rust-Oleum High Performance C9578 System Coal Tar Epoxy. This high-solids, polyamide-converted epoxy includes refined coal tar pitch and forms an extremely durable coating.

• **Protects against severe abrasion, strong chemicals and immersion in water (non-potable)**

- Ideal for use on steel, concrete and other surfaces in extremely corrosive environments
- Self-priming, high-build coating (16-24 mils in a single coat); meets stringent specifications*
- Two-year rust-proof guarantee — maximum corrosion protection
- *Meets Corps of Engineers Specs C-200, C-200A, Steel Tank Institute Corrosion Control System STI-P3, AWWA Spec C210-84, and SSPC-Paint 16

This is a two-component system. Order base and activator separately.

- C9578402** Coal Tar Epoxy (3.02 L)
C9502504 Coal Tar Epoxy Activator (946 mL)
C9578380 Coal Tar Epoxy Base (15.1 L)
C9502402 Coal Tar Epoxy Activator (3.78 L)

APPLICATION

SUBSTRATE

STEEL CONCRETE

VOC g/l

VOC <250

Covers: 9.3-12.08 m² (100-130 ft²) per 3.78 L



FOR USE ON:

- Steel beams and structural steel
- Conveyors and industrial equipment
- Machinery and piping
- Areas that are subjected to frequent washdowns or abrasive environments

5300 SYSTEM WATER-BASED EPOXY

Get exceptional surface protection with Rust-Oleum High Performance 5300 System Water-Based Epoxy. The coating forms a hard, protective finish that resists chemicals, abrasion and corrosion in moderate to severe industrial settings.

• **Excellent adhesion — can be applied to damp surfaces; durable, high-gloss finish**

- Perfect for abrasive environments and areas that are subjected to frequent wash-downs
- Ideal for steel structures; also great for masonry surfaces
- Two-year rust-proof guarantee — maximum corrosion protection

This is a two-component system. Order base and activator separately.

- COLOURS (3.31 L)**
5382408 Silver Grey
5379408 Black
5392408 White
- ACTIVATOR (473.18 mL)**
5301604 Finish Coat Activator

- SAFETY COLOURS (3.31 L)**
5344408 Safety Yellow

- TINT BASES (3.07 L)**
5308421 Deep
5309404 Light

- PRIMERS (2.84 L)**
5381405 Grey Primer

- PRIMER ACTIVATOR (946 mL)**
5303502 Primer Activator

APPLICATION

SUBSTRATE

STEEL GALVANIZED CONCRETE ALUMINUM MASONRY

VOC g/l

VOC <250

Covers: 18.58-32.5 m² (200-350 ft²) per 3.31 L



URETHANE



FOR USE ON:

- Tanks & towers
- Equipment & metal buildings
- Structural steel & rusted surfaces

9800 SYSTEM DTM URETHANE MASTIC

For ultimate protection and long-lasting appearance, choose Rust-Oleum's High Performance 9800 System DTM Urethane Mastic. This direct-to-metal (DTM) formula fights rust while delivering durable color retention in aggressive environments.

• **Ideal for tanks, towers, metal equipment, etc. in moderate to severe industrial settings**

- Self-priming — covers in just one coat; two components — order base and activator separately
- High-solids, high-build, sag resistant; extremely durable
- Two-year rust-proof guarantee — maximum corrosion resistance
- Prime first with the HS9300 System Epoxy Primer in red or grey

This is a two-component system. Order base and activator separately.

COLOURS (3.16 L)

- 9871419** Dunes Tan
9865419 Regal Red
9886419 Navy Grey
9882419 Silver Grey
9815419 Alumi-NON®
9879419 Black
9892419 White
321696 Flat Black

- 322009** Flat Black (5 gal.)
9871383 Dunes Tan (5 gal.)
252726 Navy Grey (5 gal.)
252716 Silver Grey (5 gal.)

SAFETY COLOURS (3.16 L)

- 9825419** Safety Blue
9844419 Safety Yellow
204004 Safety Red

TINT BASES (3.14 L)

- 9805470** Red
9806470 Yellow
9807470 Masstone
9808405 Deep
9809415 Light

ACTIVATOR (946 mL)

- 9801501** Activator

COMPANION PRODUCTS

- 202548** Urethane Accelerator

APPLICATION

SUBSTRATE

STEEL GALVANIZED CONCRETE

VOC g/l

VOC <340

Covers: 14.86-26.01 m² (160-280 ft²) per 3.7 L



FOR USE ON:

- Chemical plants and power plants
- Utilities and vehicles
- Transportation equipment
- Equipment in heavy industrial, severe coastal and offshore environments

9700 SYSTEM ACRYLIC POLYESTER URETHANE

Get the ultimate, long-lasting protective coverage—and lower VOCs—with Rust-Oleum's High Performance 9700 System 250 VOC Acrylic Polyester Urethane. This polyurethane coating maintains its rich colour as it fights rust—perfect for aggressive environments.

• **Ideal for vehicles, structural steel, etc. in severe coastal, offshore, or chemical settings**

- Extreme durability — heavy-duty rust, chemical, impact and abrasion resistance
- Ultimate colour and gloss retention; high solids; thin-film application; one-coat coverage
- Two-year rust-proof guarantee — maximum corrosion resistance

This is a two-component system. Order base and activator separately.

COLOURS (3.03 L)

- 207278** Silver Grey
207277 Gloss Black
207279 Gloss White
207273 Crystal Clear

ACTIVATOR (946 mL)

- 207243** Activator (qt.)

COMPANION PRODUCTS

- 202548** Urethane Accelerator

TINT BASES (2.56 L)

- 207247** Masstone
207271 Deep
207272 Light

APPLICATION

SUBSTRATE

STEEL GALVANIZED CONCRETE†

VOC g/l

VOC <250

Covers: 33.45-79.90 m² (360-860 ft²) per 3.03 L

† May require epoxy primer (see Technical Data Sheet)



SPECIALTY



FOR USE ON:

- Damaged galvanized steel
- Production welds
- Fences & bridges
- Tanks & utility towers and more
- Vehicles & trailers

V2100 SYSTEM GALVANIZING COMPOUND

Touch up galvanized surfaces with Rust-Oleum High Performance V2100 System Galvanizing Compound Spray. This 93% pure zinc coating provides maximum corrosion resistance and excellent adhesion and durability on galvanized metal.

- **Use to touch-up/repair galvanized ducts, storage tanks, etc. in moderate to severe environments**
- Dries fast — 20 minutes to the touch; withstands heat to 93°C (200°F)
- Performance offset to Federal Specifications DOD-P-21035A; MIL-P-26915C
- For large projects, apply using the High Performance Comfort Grip
- Accepted for use in federally registered Canadian food facilities; VOC-compliant nationwide

COLOURS (567 g)

- **V2185838** Cold Galvanizing Compound
- **V2117838** Bright Galvanizing Compound

COMPANION PRODUCTS

- 243546** Spray Grip
- 241526** Comfort Grip

APPLICATION

SUBSTRATE

VOC g/l

COMPLIANT NATIONWIDE



FOR USE ON:

- Hard to reach areas and minimal surface prep projects
- Complex shapes
- Equipment
- Railings

V2100 SYSTEM RUST REFORMER

Stop the development of rust with the V2100 High Performance System Rust Reformer. This coating adheres to rusted metal and instantly turns it into a non-rusty surface. No need to sand down to bare metal; just spray directly on the rust.

- **Professional-resistant coating superior to chipping, cracking and peeling**
- Becomes hard and dull black when drying; the application of a topcoat is optional
- Heat resistant up to 93°C (200°F)
- Accepted for use in federally registered Canadian food facilities; VOC-compliant nationwide

COLOURS (425 g)

- **215634** Rust Reformer

COMPANION PRODUCTS

- 243546** Spray Grip
- 241526** Comfort Grip

APPLICATION

SUBSTRATE

VOC g/l

COMPLIANT NATIONWIDE



SPECIALTY



FOR USE ON:

- Boilers & steam pipes
- Vents & exhaust pipes
- Kilns

STEEL-TECH™ STAINLESS STEEL COATING

Get optimal metal protection with Rust-Oleum Steel-Tech™ High Performance Spray Paint. This innovative coating features stainless steel flakes to provide supreme protection in harsh environments.

- **Combines with the Steel-Tech polyurethane-based coating for easy touch-ups**
- High solids content for excellent coverage in one layer
- Dries quickly in just 20 minutes to the touch
- Offers excellent gloss retention
- Uses real 316 L stainless steel flakes

COLOURS (425 g)

- **268863** Metallic Grey

COMPANION PRODUCTS

- 243546** Spray Grip
- 241526** Comfort Grip

APPLICATION

SUBSTRATE

VOC g/l

COMPLIANT NATIONWIDE



SPECIALTY



FOR USE ON:

- Boilers & steam pipes
- Vents & exhaust pipes
- Kilns

V2100 SYSTEM
HIGH HEAT SPRAY

Add an attractive, heat-resistant finish with the high-temperature spray coating of the Rust-Oleum V2100 High Performance System. This direct-to-metal formula provides the best possible protection against corrosion and heat and provides a long-lasting, durable finish.

- **Withstands temperatures up to 537°C (1000°F)**
- Professional-resistant finish superior to chipping, cracking and peeling
- High flow nozzle for 50% faster application; dry enamel 20% faster than other brands
- Accepted for use in federally registered Canadian food facilities; VOC-compliant nationwide

COLOURS (426 g)

- **V2116838** High Heat Aluminum
- **V2176838** High Heat Black

COMPANION PRODUCTS

- 243546** Spray Grip
- 241526** Comfort Grip

APPLICATION

SUBSTRATE

METAL

VOC g/l

COMPLIANT
NATIONWIDE



FOR USE ON:

- **High Heat Coatings:** Pipes, kilns, furnaces, boilers, incinerators, smoke stacks and more
- **Grey Zinc-Sele:** Boilers, incinerators, silos, smoke stacks and kilns
- **Pure Silicone Aluminum:** Incinerators, drying kilns, stacks and similar high heat equipment
- **General Purpose Leafing Aluminum and Heavy-Duty Aluminum:** Tanks, fences

HIGH HEAT COATINGS

Rust-Oleum offers three levels of nationally VOC-compliant High Heat Coatings. These performance levels are based on surface exposure. General Purpose High Heat Coatings are designed for surfaces exposed to temperatures up to 205°C (400°F). Heavy Duty High Heat Coatings are designed for surfaces exposed to temperatures up to 427°C (800°F).

- **High Performance High Heat Coatings offer the highest level of performance for surfaces exposed to temperatures up to 650°F (1200°F). Each level of protection is offered in black or aluminum.**
- Easy application via spray, brush and roll

COLOURS (3.78 L)

- | General Purpose
(205°C [400°F]) | Heavy Duty
(427°C [800°F]) | High Performance
(650°C [1200°F]) |
|------------------------------------|-------------------------------|--------------------------------------|
| ■ 286501 Aluminum | ■ 286507 Aluminum | ■ 286510 Aluminum |
| ■ 286503 Black | ■ 286509 Black | ■ 286512 Black |

APPLICATION

SUBSTRATE

STEEL CERAMIC

VOC g/l

VOC <420

COMPLIANT
NATIONWIDE

SPECIALTY



FOR USE ON:

- Ceilings & walls
- Roof trusses
- HVAC ductwork & pipes

5100 SYSTEM ACRYLIC
DRYFALL COATING

For ceilings and overhead projects, choose Rust-Oleum High Performance 5100 System Acrylic Dry Fall Coating. Any overspray from this low-VOC, water-based formula falls dry to a sweepable dust within 10 feet of the application for easy clean-up.

- **Maximum adhesion — even on glossy surfaces**
- High-hiding formula — covers stains quickly, requires fewer coats, dries to a flat white finish
- Excellent for ceilings — improves light reflectivity
- Provides long-lasting protection; resists flash rusting; for indoor use
- Apply when temps are 25°C (77°F) and relative humidity is 50%

COLOURS (18.9 L)

- **251280** White

APPLICATION

SUBSTRATE

CONCRETE METAL DRYWALL WOOD ALUMINUM GALVANIZED

VOC g/l

VOC <100

COMPLIANT
NATIONWIDE

Covers: 19.5-24.15 m²
(210-260 ft²) per 3.78 L



FOR USE ON:

- Bare sheet metal and production welds
- Galvanized ducts and storage tanks
- Fences, gutters, trucks and trailers
- Offshore drilling rigs and utility towers

7000 SYSTEM COLD
GALVANIZING COMPOUND

Instantly galvanize metal surfaces or repair worn or damaged galvanized steel with Rust-Oleum High Performance 7000 System Cold Galvanizing Compound. The coating contains 95% pure zinc in the dry film — for maximum corrosion resistance.

- **Two-year rust-proof guarantee — maximum corrosion protection**
- Protects and repairs bare sheet metal, galvanized ducts, storage tanks, etc.
- Self-priming; excellent adhesion to galvanized metal
- Ideal for use in mild industrial environments

COLOURS (3.7 L)

- **206193** Cold Galvanizing Compound

COLOURS (946 mL)

- **206194T** Cold Galvanizing Compound

APPLICATION

SUBSTRATE

GALVANIZED

VOC g/l


VOC <500 METALLIC

COMPLIANT
NATIONWIDE

Covers: 28.8-40.88 m²
(310-440 ft²) per 3.7 L



SPECIALTY

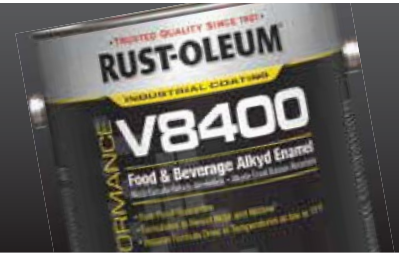

FOR USE ON:

- Equipment
- Structural steel and pipes
- Metal cabinets and lockers
- Railings, trim and doors
- Gates and vents

V8400 SYSTEM FOOD & BEVERAGE ALKYD ENAMEL

Get all the benefits of the V7400 System Enamel — plus a range of additional features that are specifically designed to support the food-manufacturing industry — with Rust-Oleum High Performance V8400 System Food & Beverage Alkyd Enamel and Alkyd Enamel Primer. Lower-VOC formula.

• **Prevents mould and mildew*; resists humidity and high heat (up to 100°C / 212°F)**

- Can be applied to surfaces as cold as - 7°C (18°F)
- Withstands corrosion from repeated washing, disinfectants and cleaning compounds
- Two-year rust-proof guarantee — maximum corrosion protection

*This product contains a mildewcide to prevent the growth of mould and mildew on the paint film only.

COLOURS (3.79 L)

- 266691 Safety Yellow
- 259158 High Gloss Dairy White

PRIMERS (3.79 L)

- 259157 White Clean Metal Primer

APPLICATION

SUBSTRATE

STEEL WOOD

VOC g/l

VOC <340

Covers: 23.2-39.5 m²
(250-425 ft²) per 3.79 L



FOR USE ON:

- Pools
- Spas
- Fountains

ACRYLIC POOL AND FOUNTAIN PAINT

Rust-Oleum® High Performance Acrylic Pool Paint is designed to offer advantages over traditional solvent based paints. This high performance acrylic can and should be applied to damp surfaces. This paint is safe to apply to previously painted chlorinated and synthetic rubber surfaces. This acrylic will clean up with soap and water and can allow the pool to be filled within 3 days after the final application of paint, when short down times are critical.

• **Low odour**

- Fast dry time — return to service in only 3 days
- Works on many surfaces — concrete, masonry, synthetic, acrylic, rubber and chlordinated rubber
- Do not use on fiberglass surfaces, hot tubs, or spas

COLOURS (3.79 L)

- 270183 Black
- 269354 White
- 269357 Marlin Blue
- 269359 Aqua

APPLICATION

SUBSTRATE

METAL CONCRETE

MASONRY STEEL

AND MORE!

VOC g/l

VOC <250

Covers: 16.3-37.16 m²
(175-400 ft²) per 3.79 L



SPECIALTY



FOR USE ON:

- Pools
- Spas
- Fountains

EPOXY POOL AND FOUNTAIN PAINT

High Performance Epoxy Pool Paint is designed to provide long lasting protection for concrete, plaster, gunite, and fiberglass swimming pools, slides, and spas. While exposure to sunlight and certain interior lighting conditions causes fading and chalking of all epoxy type coatings, these changes are cosmetic in nature only and film integrity and performance will not be adversely affected. Epoxy coatings will yellow with age. This is most noticeable with interior applications of white or light colours which are not subjected to bleaching from sunlight.

• **Do not use over chlorinated rubber, synthetic rubber, vinyl, or acrylic substrates**

COLOURS (3.76 L)

- 270182 Black
- 267919 White
- 267940 Marlin Blue

APPLICATION

SUBSTRATE

METAL CONCRETE

MASONRY STEEL

AND MORE!

VOC g/l

VOC <100

COMPLIANT NATIONWIDE

Covers: Up to 65 m²
(700 ft²) per kit



FOR USE ON:

- New steel construction
- Areas subject to abrasive forces
- Mining equipment
- Outdoor equipment
- Tanks
- Bridges

META PRIME EPOXY PRIMER

Rust-Oleum META Prime utilizes patented, self-healing technology to extend coating life on surfaces subject to damage. It is an epoxy primer designed to maintain adhesion and prevent rust creep after the coating is damaged. When the surface is damaged, META Prime releases a healing agent that cures to regenerate protection to the coated surface. Minimize repaints and avoid constant touch up with the assurance provided by META Prime.

• **Patented self healing technology**

- Maintains adhesion after damage
- Extended coating life
- Two-component epoxy
- Excellent corrosion resistance
- Convenient 1:1 mix ratio

COLOURS

- 310321 Grey Base (1.82 L)
- 313481 Grey Kit (3.73 L)

ACTIVATOR

- 310706 Activator (1.82 L)

APPLICATION

SUBSTRATE

STEEL TIGHTLY ADHERED RUST

VOC g/l

VOC <340

Covers: 9.3-16.3 m²
(100-175 ft²) per 3.73 L



THINNERS

Rust-Oleum thinners are, most often, blends of two or three different solvents tailor-made for each system. The information listed for thinning and clean up on our technical data sheets are calculated using these thinners and it is highly recommended that these thinners are used to ensure the coatings apply correctly.

150 XYLENE THINNER (3.78 L)

For use with the 1500 System speedy-dry alkyd enamel.
150402



160 EPOXY THINNER (3.78 L)

Designed for use with the 9100 System epoxies, this thinner can be used for any epoxy or alkyd coating. Perfect for grease and oil removal, adhesive removal, and cleaning of brushes, rollers or spray equipment.
160402



190 URETHANE THINNER (3.78 L)

Specially formulated for use with urethane coatings, this thinner will remove grease, oil and adhesives. Can also be used with epoxy coatings.
190402



633 MINERAL SPIRITS THINNER (3.78 L)

Best for use on alkyd and latex coatings for cleaning equipment. Brush application.
633402



641 NAPHTHA THINNER (3.78 L)

Best for use on alkyd and latex coatings for cleaning equipment. Spray application.
641402



165 WATER IMMERSION THINNER (3.78 L)

Water immersion thinner.
165402



140 HIGH HEAT THINNER (3.78 L)

4200 System thinner to be used with high heat coatings.
140402



COMPLIANT THINNER (3.78 L)

Thin any product without raising the VOC.
315512



INDUSTRIAL COATINGS TECHNICAL DATA

The data contained in this chart is presented for the comparison of basic physical characteristics of Coatings. For more detailed information, see Rust-Oleum technical data sheets for individual products.	RECOMMENDED FILM THICKNESS				PERCENT VOLUME SOLIDS	COVERAGE				DRY TIME HRS. AT 21°C (70°F)– 27°C (80°F) & 50% HUMIDITY				THINNING AS NEEDED			CLEAN-UP	MIX RATIO / ACTIVATOR NO.	POT LIFE HRS. AT 21°C (70°F) – 27°C (80°F) & 50% HUMIDITY	DRY HEAT RESISTANCE (°C/°F)	VOC LEVEL (g/l) VOLATILE ORGANIC COMPOUND	FLASH POINT (°C/°F)	APPLICATION TEMPERATURE RANGE
	WET		DRY			PRACTICAL ASSUMES 15% MATERIAL LOSS		THEORETICAL AT 1 MIL DFT.		TACK-FREE	HANDLE	RECOAT	TRAFFIC	BRUSH / ROLLER	AIRLESS SPRAY	AIR-ATOMIZED SPRAY							
	MILS	MICRONS	MILS	MICRONS		ft. ² /gal.	m ² /l	ft. ² /gal.	m ² /l														
CV740 System– 100 VOC DTM Alkyd Enamel	3.5- 5.5	87.5- 137.5	1.5- 2.5	37.5- 62.5	46- 48	255- 435	6.3- 10.7	750- 770	18.5- 18.9	4-6	8-12	24	—	—	333402 5%	333402 Up to 45%	333402 or 633402	—	—	100°C 212°F	<100	40°C 104°F	0-38°C 32-100°F
V7400 System– DTM 340 VOC Alkyd Enamel	20- 35	50- 875	1-2	25- 50	58- 61	400- 830	9.8- 20.4	930- 975	22.9- 24	3-5	8-12	24	—	—	333402 5-10%	333402 10%	333402	—	—	100°C 212°F	<340	40°C 104°F	0-38°C 32-100°F
V8400 System– Food & Beverage 340 VOC Alkyd	3.5- 5.5	37.5- 62.5	1.5- 2.5	37.5- 62.5	47	250- 425	6.2- 10.5	750	18.5	2-4	4-8	24	—	—	333402 5-10%	333402 10%	333402	—	—	100°C 212°F	<340	40°C 104°F	0-38°C 32-100°F
6100 System– Shop Coat Primer	2.5- 4.5	62.5- 111.25	1.5- 2.5	37.5- 62.5	58	315- 525	7.7- 12.9	930	22.9	30 min.	1	4	—	—	333402 5%	333402 up to 10%	333402 or 633402	—	—	212°F	<340	25°C 78°F	0-38°C 32-100°F
Universal Acrylic Primer	3-6	75- 150	1-2	25- 50	34	350- 450	8.6- 11.1	545	13.4	35 min.	1	1	—	—	—	—	Soap/ Water	—	—	100°C 212°F	<100	82°C 180°F	10-32°C 50-90°F
5200 System DTM Acrylic	5-9	125- 225	2-3	50- 75	33- 38	150- 260	3.7- 6.4	530- 610	13- 15	1-2	2-4	1-3	—	—	Water Up to 6%	Water Up to 12%	Soap/ Water	—	—	93°C 200°F	<250	>93°C 200°F	10-38°C 50-100°F
9100 System DTM Epoxy Mastic (with 9101402 Activator)	6.5- 10.5	162.5- 262.5	5-8	125- 200	78- 81	125- 225	3.1- 5.5	1250- 1300	30.8- 32.0	6-8	6-12	16- 72	—	—	—	160402 10%	160402	1:1 70°F	2-41	149°C 300°F	<340	43°C 110°F	10-38°C 50-100°F
5300 System –Industrial Water-Based Epoxy w/5301604 Activator	4- 6.5	100- 162.5	1.5- 2.5	37.5- 62.5	38	200- 350	4.9- 8.6	600	14.8	½-1	2-5	1-2	—	—	—	Water 10%	Soap/ Water	7:1	6-8	149°C 300°F	<250	55°C 132°F	16-38°C 60-100°F
C9578 System – Coal Tar Epoxy	10.5- 13.5	262.5- 337.5	8- 10	200- 250	75- 77	100- 130	2.5- 3.2	1203- 1235	29.6- 30.4	3-4	18- 36	16- 25	—	—	160402 0-16%	160402 0-16%	160402 MEK	4:1	2 80°F	60°C 140°F	<250	48°C 86°F	10-30°C 50-100°F
9700 System – 250 VOC Acrylic Polyester Urethane w/207243 Activator	2-4	50- 100	1-2	25- 50	52.6- 62.8	360- 860	8.9- 21.2	845- 1010	20.8- 24.8	2-4	3-6	16- 24	—	—	—	—	Zylene or MEK	4:1	3-4 77°F	149°C 300°F	<250	-7°C 20°F	4-38°C 40-100°F
9800 System – DMT Urethane Mastic w/9801501 Activator	5-8	125- 200	3-5	75- 125	58- 62	160- 280	3.9- 6.9	930- 990	22.9- 24.4	4-6	6-9	16- 24	—	—	—	—	190402	5:1	2-3 70°F	149°C 300°F	<340	36°C 95°F	40-100°F 5-38°C
Beyond™ Acrylic Enamel	3-8	75- 200	1-3	25- 75	36- 38	165- 520	4.1- 12.8	580- 610	14.3- 15	30	—	2-4	—	Water	Water	Water	Soap/ Water	—	—	—	0	>93°C 200°F	10-38°C 50-100°F
Sierra Acrylic Multi-Surface Primer	2.5- 7.5	62.5- 187.5	1-3	25- 75	40	180- 545	4.4- 13.4	640	15.8	30 min.	1-2	—	—	Water	Water	Water	Soap/ Water	—	—	—	0	100°C 212°F	10-38°C 50-100°F
S60 System – Water-Based Epoxy Maintenance Coating	4-6	100- 150	2-3	50- 75	50	230- 340	5.7- 8.4	800	19.7	30 min.	1-3	—	—	Water	Water	Water	Soap/ Water	2:1	2	—	0	>93°C 200°F	10-38°C 50-100°F

INDUSTRIAL COATINGS TECHNICAL DATA

The data contained in this chart is presented for the comparison of basic physical characteristics of Coatings. For more detailed information, see Rust-Oleum technical data sheets for individual products.	RECOMMENDED FILM THICKNESS				PERCENT VOLUME SOLIDS	COVERAGE				DRY TIME HRS. AT 21°C (70°F)– 27°C (80°F) & 50% HUMIDITY				THINNING AS NEEDED			CLEAN-UP	MIX RATIO / ACTIVATOR NO.	POT LIFE: HRS. AT 21°C (70°F)– 27°C (80°F) & 50% HUMIDITY	DRY HEAT RESISTANCE (°C/°F)	VOC LEVEL (g/l) VOLATILE ORGANIC COMPOUND	FLASH POINT (°C/°F)	APPLICATION TEMPERATURE RANGE
	WET		DRY			PRACTICAL ASSUMES 15% MATERIAL LOSS		THEORETICAL AT 1 MIL DFT.		TACK-FREE	HANDLE	RECOAT	TRAFFIC	BRUSH / ROLLER	AIRLESS SPRAY	AIR-ATOMIZED SPRAY							
	MILS	MICRONS	MILS	MICRONS		ft. ² /gal.	m ² /l	ft. ² /gal.	m ² /l														
S70 System – Brush Industrial Epoxy Primer w/208112 Activator	5-7	125-175	2-3	50-75	43	200-300	4.9-7.4	690	17	30 min	1-2	—	—	Water	—	—	Soap/Water	1:1	2	—	0	>100°C 212°F	10-38°C 50-100°F
MetalMax™ DTM Acrylic Enamel	2.5-7.5	62.5-187.5	1-3	25-75	35-39	180-545	4.4-13.4	640	15.8	30 min	2-4	—	—	Water	Water	Water	Soap/Water	—	—	—	0	>93°C 200°F	10-38°C 50-100°F
Noxyde®	12	300	7	175	55	110	2.7	880	21.6	2	2-4	4	—	—	—	—	Soap/Water	—	—	80°C 176°F	<100	>93°C 200°F	8-55°C 46-130°F
Pool Paint – Acrylic	3.0-6.0	75-150	1.0-2.0	25-50	34-36	230-460	5.6-11.3	545-577	13.4-14.2	6-8	6-12	16	—	Water	Water	Water	Soap Water	—	—	—	<200	112°C 201°F	10-38°C 50-90°F
Pool Paint – Epoxy	6.5-10.0	162.5-250	5.0-8.0	125-200	76-80	130-215	3.2-5.3	1214-1279	29.9-31.4	8-10	10-16	24	—	—	—	160402 5-10%	160402 Zylene	1:1	2	—	<100	120°F	15-38°C 60-100°F
5100 System–Acrylic Dryfall Coating	5.5-6.5	137.5-162.5	2.0-2.5	50-62.5	38	210-260	5.2-6.4	610	15	—	35 min	1	—	—	Water 10 fl. oz./gal	Water 10 fl. oz./gal	Soap/water	—	—	93°C 200°F	<100	93°C 212°F	10-32°C 50-90°F
7000 System – Cold Galvanizing Compound	3.5-4.5	87.5-112.5	2.5-3.5	62.5-87.5	54.1	310-440	7.6-10.8	1280	21.3	½-1	1-2	12	—	—	633402 5-10%	633402 10-15%	633402 or 641402	—	—	100°C 212°F	<500	35°C 95°F	0-38°C 32-100°F
3800 System–DTM Acrylic Enamel	5-8	125-200	2-3	50-75	—	150-270	3.7-6.6	522-635	12.8-15.6	15 min	45 min	2	—	—	—	—	—	—	—	93°C 200°F	<250	—	—
META Prime	8-13	200-325	5-8	125-200	—	100-175	2.5-4.3	995-1042	24.5-25.6	6-8	8-14	16	—	—	—	—	—	—	—	—	<340	—	—
3300 System–Acrylic Aliphatic Urethane	2-4	50-100	1-2	25-50	—	355-770	8.7-18.9	835-910	20.5-22.4	2.5-3.5	7-9	16	—	—	—	—	—	—	—	149°C 300°F	<250	—	—
High Heat Coating	2.5-5.5	62.5-112.5	1-2	25-50	—	250-540	6.2-13.3	590-634	14.5-15.6	—	1-2	8-24	—	—	—	—	—	—	—	204°C 400°F	<420	—	—
9200 System–Low Temperature Epoxy	6-9.5	150-238	4-6	100-150	—	140-225	3.4-5.5	1010-1075	24.8-26.4	30 min	3	45 min.	—	—	—	—	—	—	—	82°C 180°F	<250	—	—
Universal Alkyd Primer	6-8	150-200	3.5-4.5	87.5-112.5	—	200-250	4.9-6.2	920	22.6	35 min	—	2	—	—	—	—	—	—	—	—	<336	—	—



Striping & Marking Paint

Rust-Oleum offers a vast assortment of striping and marking spray paints for any job. From precision markings for utility locating or bold markings for a construction job, our marking paint selection is the most complete in the industry. When it comes to striping parking lots, athletic fields or walkways, our collection of trusted striping paints go the distance with long-lasting results you can count on every time.





FOR USE ON:

- Utility and construction
- Excavation
- Surveying and landscape
- Golf course markings

M1600/M1800 SYSTEM
PRECISION LINE INVERTED
MARKING PAINT

Water and solvent-based marking paints feature a precision-line spray tip for easy-to-read bright, vivid markings for utility, construction, excavation, surveying, landscape and golf course markings.

• **Best resistance against premature fading**

- Precision spray tip
- Marks more linear feet per can than other brands
- No mess spray tip keeps paint off fingers
- Locking tip does not pop off
- Virtually no overspray
- Dries fast — less than 5 minutes
- Convenient spray-through cap
- Guaranteed not to clog

APPLICATION

SUBSTRATE

CONCRETE PAVEMENT
GRASS GRAVEL
AND MORE!

VOC g/l

COMPLIANT
NATIONWIDE

TOTAL LINEAR FEET COMPARISON



APWA UNIFORM COLOUR CODE

YELLOW	Gas, oil, steam, petroleum, gaseous materials
RED	Electric power lines, cables, conduit, lighting cables
PURPLE	Reclaimed water, irrigation, slurry lines
BLUE	Potable water
GREEN	Sewers and drain lines
WHITE	Proposed excavation
PINK	Temporary survey markings
ORANGE	Communication, alarm/signal lines, cables, conduit

M1600 SOLVENT-BASED
COLOURS (482 g)

- 203022 APWA / Caution Blue
- 203024 Caution Yellow
- 203025 High Visibility Yellow
- 203026 Alert Orange
- 201516 APWA Orange
- 1675838 Black
- 203030 White
- 1601838 Clear
- 239007 Silver (454 g)
- 1634838 APWA / Safety Green
- 203029 Safety Red

FLUORESCENTS (482 g)

- 1669838 Fluorescent Purple
- 1662838 Fluorescent Red
- 203028 Fluorescent Red-Orange

FLUORESCENTS (482 g)

- 203023 Fluorescent Green
- 203027 Fluorescent Orange
- 1661838 Fluorescent Pink

M1800 WATER-BASED
COLOURS (482 g)

- 203031 APWA / Caution Blue
- 203033 Caution Yellow
- 203034 High Visibility Yellow
- 203035 APWA / Alert Orange
- 1875838 Black
- 203039 White
- 1801838 Clear (454 g)

SAFETY COLOURS (482 g)

- 1834838 APWA / Safety Green
- 1868838 Safety Purple
- 203038 Safety Red

FLUORESCENTS (482 g)

- 205176 Fluorescent Blue
- 1869838 Fluorescent Purple
- 1862838 Fluorescent Red
- 203037 Fluorescent Red-Orange
- 203032 Fluorescent Green
- 203036 Fluorescent Orange
- 1861838 Fluorescent Pink

COMPANION PRODUCTS

- 268476 Marking Wand
- 210188 Marking Pistol



FOR USE ON:

- Utility and construction
- Excavation and surveying
- Landscape and golf course markings

M1400 SYSTEM
CONSTRUCTION
MARKING PAINT

The only marking paint needed for any job or landscape applicator.

• **Bold, easy to see markings for excellent visibility**

- Excellent visibility on concrete, dirt, gravel, grass, wood and more
- Best resistance against early fading and chalking
- Non-clogging, inverted spray tip won't pop off
- Water and Solvent-based formula

WATER-BASED
COLOURS (482 g)

- 264693 Clear
- 264692 White
- 264694 Caution Blue
- 264695 High Visibility Yellow
- 264696 Safety Red
- 314062 Safety Green
- 316312 Safety Purple

FLUORESCENTS (482 g)

- 264697 Fluorescent Orange
- 264702 Fluorescent Pink
- 264699 Fluorescent Red-Orange
- 264700 Fluorescent Green

SOLVENT-BASED
COLOURS (482 g)

- 331774 Clear
- 331775 White
- 331776 Caution Blue
- 331777 High Visibility Yellow
- 331778 Safety Red

FLUORESCENTS (482 g)

- 331779 Fluorescent Orange
- 331780 Fluorescent Pink
- 331781 Fluorescent Red-Orange
- 331782 Fluorescent Green

COMPANION PRODUCTS

- 268476 Marking Wand
- 210188 Marking Pistol

APPLICATION

SUBSTRATE

CONCRETE PAVEMENT
GRASS GRAVEL
AND MORE!

VOC g/l

COMPLIANT
NATIONWIDE

V2300 SYSTEM INVERTED
MARKING PAINT

High output inverted marking paint for bold, easy-to-see markings.

• **High solids for bold and bright markings**

- Dries fast — less than 5 minutes
- Guaranteed not to clog
- Convenient spray through cap
- Use with Marking Wand or Pistol for comfortable and accurate site marking

COLOURS (426 g)

- V2324838 Caution Blue
- V2345838 Caution Yellow
- V2354838 Alert Orange
- V2344838 High Visibility Yellow
- V2392838 White
- V2301838 Clear
- V2363838 Safety Red

FLUORESCENTS (426 g)

- V233838 Fluorescent Green
- V2355838 Fluorescent Orange
- V2358838 Fluorescent Red-Orange

COMPANION PRODUCTS

- 2393000 Marking Wand
- 210188 Marking Pistol



FOR USE ON:

- Utility locating
- Surveying
- Construction sites and excavation sites
- Landscape and golf course markings

APPLICATION

SUBSTRATE

CONCRETE PAVEMENT
GRASS GRAVEL
AND MORE!

VOC g/l

COMPLIANT
NATIONWIDE



- FOR USE ON:**
- Utility and construction
 - Excavation and surveying
 - Landscape and golf course markings

M1900 SYSTEM 360° MARKING PAINT

- The only marking paint needed for any job or landscape applicator.
- **Bold, easy-to-see markings for excellent visibility**
 - Excellent visibility on concrete, dirt, gravel, grass, wood and more
 - Best resistance against early fading and chalking
 - Non-clogging, inverted spray tip won't pop off
 - Water-based formula

- COLOURS (482 g)**
- 247837 White
 - 247832 High Visibility Yellow

- FLUORESCENTS (482 g)**
- 247835 Fluorescent Orange
 - 247836 Fluorescent Red-Orange
 - 247834 Fluorescent Green
 - 247833 Fluorescent Red

- COMPANION PRODUCTS**
- 268476 Marking Wand
 - 210188 Marking Pistol



APPLICATION

SUBSTRATE

CONCRETE PAVEMENT
GRASS GRAVEL
AND MORE!

VOC g/l

COMPLIANT
NATIONWIDE



- FOR USE ON:**
- Utility
 - Construction and excavation
 - Surveying
 - Landscape and golf course markings

MC1800 SYSTEM PRECISION LINE INVERTED MARKING CHALK

- Marking chalk for temporary markings that last up to 30 days.
- **Can be easily removed with a wire brush and water or pressure washing**
 - Precision-line spray tip creates clean, easy-to-read markings
 - Virtually no overspray
 - Scuff-resistant in 10 minutes
 - Convenient spray-through cap
 - Locking tip does not pop off
 - Guaranteed not to clog

- COLOURS (482 g)**

 - 205236 APWA Blue
 - 205238 APWA Green
 - 205234 APWA Yellow
 - 205233 APWA Orange
 - 205235 APWA Red
 - 205237 APWA White
- COMPANION PRODUCTS**

 - 268476 Marking Wand
 - 210188 Marking Pistol


APPLICATION

SUBSTRATE

CONCRETE PAVEMENT
GRASS GRAVEL
AND MORE!

VOC g/l

COMPLIANT
NATIONWIDE

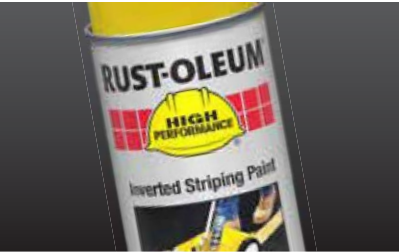

- FOR USE ON:**
- Aisles and lift truck routes
 - Pallet positions and hazardous areas
 - Commercial parking lots and playgrounds
 - Stadiums and athletic facilities

2300 SYSTEM INVERTED STRIPING PAINT

- Solvent-based inverted striping paint for durable and bright long-lasting lines.
- **Highest solids for complete coverage**
 - Dries fast — less than 10 minutes
 - Guaranteed not to clog
 - Use with Striping Machine or Striping Wand

- COLOURS (510 g)**

 - 2326838 Blue
 - 2348838 Yellow
 - 2364838 Red
 - 2378838 Black
 - 2391838 White
- COMPANION PRODUCTS**

 - 2395000 Striping Machine
 - 2388000 Striping Wand

APPLICATION

SUBSTRATE

CONCRETE PAVEMENT
DIRT GRAVEL
AND MORE!

VOC g/l

COMPLIANT
NATIONWIDE



- FOR USE ON:**
- Parking lots
 - Stadiums
 - Curbs
 - Athletic facilities

2300 SYSTEM TRAFFIC ZONE STRIPING PAINT

- Water-based acrylic coating for large striping jobs such as parking lots, stadiums and athletic facilities.
- **Dries fast – 30 minutes touch and tack free**
 - Creates up to 410 linear feet with a 4" stripe
 - MPI #97 certified

- COLOURS (FLAT)**

 - 2326402 Traffic Blue
 - 2348402 Traffic Yellow
 - 243276 Traffic Red
 - 246774 Traffic Black
 - 2391402 Traffic White
 - 263445 Traffic Dark Blue
 - 2348300 Traffic Yellow (5 Gal.)
 - 2391300 Traffic White (5 Gal.)
- COLOURS (SEMI-GLOSS)**

 - 283900 Traffic Blue
 - 283902 Traffic Yellow
 - 283868 Traffic Red
 - 283906 Traffic Black
 - 283903 Traffic White
 - 283907 Bike Lane Green
 - 202475 Traffic Yellow (5 Gal.)
 - 202357 Traffic White (5 Gal.)

APPLICATION

SUBSTRATE

CONCRETE PAVEMENT
GRAVEL
AND MORE!

VOC g/l

VOC <100



- FOR USE ON:**
- Parking lots and school grounds
 - Pallet positions and warehouses
 - Truck routes
 - Stadiums and athletic facilities

S1600 SYSTEM INVERTED STRIPING PAINT

- Solvent-based inverted striping paint for crisp, long-lasting lines for use in athletic facilities, stadiums, parking lots and more.
- **Dries fast – less than 10 minutes**
 - Guaranteed not to clog
 - Use with Striping Machine or Striping Wand

- COLOURS (454 g)**

 - 1627838 Blue
 - 263446 Dark Blue
 - 1648838 Yellow
 - 1665838 Red
 - 1677838 Black
 - 1691838 White
- COMPANION PRODUCTS**

 - 2395000 Striping Machine
 - 2388000 Striping Wand

APPLICATION

SUBSTRATE

CONCRETE PAVEMENT
GRASS GRAVEL
AND MORE!

VOC g/l

COMPLIANT
NATIONWIDE



FOR USE ON:

- Athletic fields
- Playgrounds
- Golf courses

AF1600 SYSTEM ATHLETIC FIELD INVERTED STRIPING PAINT

Water-based striping paint formula specially designed for use on athletic fields, playgrounds, golf courses and more.

• *Fast-drying formula creates bright, durable lines*

- Will not harm grass
- Guaranteed not to clog

COLOURS (482 g)

- | | |
|--------|--------------------|
| 206045 | Yellow |
| 206044 | Orange |
| 206043 | White |
| 257403 | Fluorescent Green |
| 257406 | Fluorescent Orange |
| 318192 | Scarlet Red |
| 318193 | Royal Blue |
| 318194 | Turf Green |
| 318195 | Black |
| 318196 | Maroon |
| 318197 | Purple |
| 318191 | Navy Blue |

COMPANION PRODUCTS

- | | |
|---------|------------------------------------|
| 206346 | Athletic Field
Striping Machine |
| 2388000 | Striping Wand |

APPLICATION

SUBSTRATE

CONCRETE

PAVEMENT

GRASS

GRAVEL

AND MORE!

VOC g/l

COMPLIANT
NATIONWIDE

COMPANION PRODUCTS



STRIPING MACHINE

- Create 2-4" straight lines quickly and easily
- Cover a larger area in a shorter time
- Convenient storage compartment holds 12 extra cans
- Sturdy steel construction
- Collapsible handle for easy storage

N2395000 Striping Machine



ATHLETIC FIELD STRIPING MACHINE

- Create 3-6" straight lines quickly and easily
- Cover a larger area in a shorter time
- Convenient storage compartment holds 12 extra cans
- Sturdy steel construction
- Collapsible handle for easy storage
- Large diameter wheels to accommodate high grass conditions

206346 Athletic Field Striping Machine



STRIPING WAND

- Use for convenient touch-up of lines or stenciling
- Sturdy, lightweight construction

2388000 Striping Wand



MARKING WAND*

- Easy, upright site marking
- Quick and convenient with no mess
- Comfortable grip
- Convenient flag holder
- Lightweight, yet durable construction
- Use with Rust-Oleum Inverted Marking Paint

268476 Marking Wand

*2393000 Standard Marking Wand still available



MARKING PISTOL

- Easy, accurate marking
- Light touch spray control
- Comfortable grip

N2393000 Marking Pistol





Commercial

Keep your company's assets looking great with Rust-Oleum Commercial coatings — for a professional, high-gloss finish that resists rust and makes a lasting impression.



ALKYD



- FOR USE ON:**
- Tools and motors
 - Furniture
 - Equipment and colour coding
 - Ladders
 - Lockers

1600 SYSTEM
MULTI-PURPOSE ENAMEL

Get fast, high-quality color with Rust-Oleum 1600 Industrial Choice® System Spray Enamel. This all-purpose paint provides up to twice the performance of competing brands. Can finish a larger area in less time with fewer aerosol cans. Dry to the touch in 12 minutes.

- **For indoor and outdoor industrial maintenance**
- Resists peeling and fading; heat resistant up to 93°C (200°F)
- The extra-large convenient nozzle eliminates finger fatigue and allows you to spray in any angle, even upside down



APPLICATION

SUBSTRATE

STEEL WOOD

MASONRY CONCRETE

AND MORE!

VOC g/l

COMPLIANT NATIONWIDE

- COLOURS (340 g)**
- 1672830 Almond
 - 1671830 Beige
 - 1674830 Leather Brown
 - 257399 Purple
 - 1626830 True Blue
 - 1622830 Regal Blue
 - 1638830 Hunter Green
 - 202211 Machine Green
 - 257401 Emerald Green
 - 1643830 School Bus Yellow
 - 202216 Dusty Pink
 - 1666830 Banner Red
 - 1664830 Cherry Red
 - 1686830 Universal Grey
 - 1684830 Dove Grey
 - 1688830 Smoke Grey
 - 202214 Machinery Grey

- COLOURS (340 g)**
- 1614830 Dull Aluminum
 - 1676830 Ultra-Flat Black
 - 1678830 Semi-Flat Black
 - 1679830 Gloss Black
 - 1692830 Gloss White
 - 1690830 Flat White
 - 257402 Semi-Gloss White
 - 1696830 Antique White
 - 1610830 Crystal Clear

- SAFETY COLOURS (340 g)**
- 1624830 Safety Blue
 - 1633830 Safety Green
 - 1653830 Safety Orange
 - 1670830 Safety Purple
 - 1660830 Safety Red
 - 1644830 Safety Yellow

- FLUORESCENTS (340 g)**
- 1632830 Fluorescent Green
 - 1654830 Fluorescent Orange
 - 1655830 Fluorescent Red-Orange
 - 1659830 Fluorescent Pink
 - 1642830 Fluorescent Yellow

- ANSI COLOURS (340 g)**
- 214645 ANSI 61 Light Grey
 - 214646 ANSI 49 Med. Lt. Grey
 - 214647 ANSI 70 Light Grey

- PRIMERS (340 g)**
- 1667830 Red Primer
 - 1680830 Grey Primer
 - 1681830 White Primer
 - 257400 Black Primer

- COMPANION PRODUCTS**
- 243456 Spray Grip
 - 241526 Comfort Grip



- FOR USE ON:**
- General plant maintenance
 - Machinery, equipment and pipes
 - Metal cabinets

6100 SYSTEM
SHOP COAT PRIMER

In mild/moderate industrial settings, prep metal surfaces with Rust-Oleum Industrial Choice® 6100 System Shop Coat Primer. This low-VOC modified alkyd primer offers low-cost protection with excellent adhesion on structural steel and fabricated metal.

- **Fast-drying, 340 VOCs**
- For indoor/outdoor general plant maintenance—machinery, pipes, metal cabinets, etc.
- Provides one-coat coverage on clean, abrasive-blasted, or lightly rusted steel
- Top with a C740 System DTM Alkyd Enamel 400 VOC or 100 VOC

- COLOURS (3.78 L)**
- 206329 Red Primer
 - 206331 Grey Primer

APPLICATION

SUBSTRATE

STEEL

VOC g/l

VOC <340

Covers: 29.36-48.8 m²
(315-525 ft²) per 3.78 L

ALKYD



- FOR USE ON:**
- Metal
 - Drywall
 - Wood
 - Vinyl

UNIVERSAL ALKYD PRIMER

Rust-Oleum's Commercial Universal Alkyd Primer is a high solids, low VOC oil-based primer designed for interior and exterior surfaces when optimal surface preparation is not possible. Our Universal Alkyd Primer is suitable for nearly all surfaces and provides excellent penetration, flexibility and stain blocking properties. It has excellent adhesion to dense, glossy surfaces such as enamel paints & varnishes, panelling, laminates and ceramic tile without the need for sanding or de-glossing. It can be used as a DTM coating and has a fast drying time.

- **Multi-purpose direct-to-metal (DTM) coating; excellent coverage and hide**
- Convenient — requires no measuring or mixing; can be brushed, rolled or sprayed
- Resists rust, chipping, general weathering, mild chemical fumes and light abrasion
- For everyday commercial use — metal trim, structural steel, handrails, cabinets, etc.

- COLOURS**
- 302140 White (3.79 L)
 - 302139 White (18.9 L)
 - 330145 Red (18.9 L)
 - 330142 Grey (3.79 L)
 - 330144 Grey (18.9 L)

APPLICATION

SUBSTRATE

STEEL WOOD

VINYL

VOC g/l

VOC <340

Covers: 27.97-37.16 m²
(300-400 ft²) per 3.79 L



- FOR USE ON:**
- Interior and exterior commercial metal applications
 - Metal trim, doors and structural steel
 - Handrails, fixtures and fire escapes
 - Vents, fences and hydrants
 - Cabinets and channels

C740 SYSTEM DTM
ALKYD ENAMEL

Get excellent protection and coverage with Rust-Oleum Commercial C740 System 400 VOC DTM Alkyd Enamel. This ready-to-use formula provides an easy-to-maintain, high-gloss finish specifically for commercial applications.

- **Multi-purpose direct-to-metal (DTM) coating; excellent coverage and hide**
- Convenient — requires no measuring or mixing; can be brushed, rolled or sprayed
- Resists rust, chipping, general weathering, mild chemical fumes and light abrasion
- For everyday commercial use — metal trim, structural steel, handrails, cabinets, etc.

- COLOURS (3.79 L)**
- 255549 Forest Green
 - 255556 Navy Grey
 - 255554 Gloss Black
 - 255553 Flat Black
 - 255558 Gloss White
 - 261948 Silver Grey
 - 261949 Dunes Tan

- SAFETY COLOURS (3.79 L)**
- 255548 Safety Blue
 - 255550 Safety Yellow
 - 255551 Safety Red

- PRIMERS (3.79 L)**
- 255544 White Primer
 - 255552 Flat Red Primer
 - 255555 Flat Grey Primer

- TINT BASES (3.79 L)**
- 255559 Masstone
 - 255563 Pastel
 - 255564 Yellow Tint
 - 255565 Red Tint

APPLICATION

SUBSTRATE

STEEL METAL

VOC g/l

VOC <400

Covers: 23.7-40.4 m²
(255-435 ft²) per 3.79 L

ACRYLIC



FOR USE ON:

- Equipment
- Structural steel and pipes
- Metal cabinets and lockers
- Railings, trim and doors
- Gates & vents

UNIVERSAL ACRYLIC PRIMER

Rust-Oleum's Universal Acrylic Primer is specifically formulated for application to a variety of surfaces that include metal, wood, concrete, plaster, wallboard, hardboard, glass, and tile. The rust inhibitive formulation also makes it an ideal choice for direct application to steel. The primer is also an excellent stain blocker and resists growth of mould and mildew.

• **Excellent hide and adhesion**

- For interior and exterior applications
- Mould and mildew resistant; rust preventive
- Tintable formula; LEED compliant

COLOURS

- ☐ **278808** White (3.79 L)
- ☐ **278807** White (18.9 L)
- ☐ **292606** Grey (3.79 L)
- ☐ **292603** Grey (18.9 L)

APPLICATION

SUBSTRATE

VOC g/l
VOC <100

COMPLIANT NATIONWIDE

Covers: 32.5-41.8 m²
(350-450 ft²) per 3.79L



ACRYLIC



FOR USE ON:

- Highly populated areas requiring low odour and mild chemical and corrosion resistance
- Machinery, equipment and pipes
- Metal cabinets, lockers and railings
- Trim, doors, gates
- Drums, vents and outdoor signage

5200 SYSTEM DTM ACRYLIC

Get direct-to-metal performance with lower VOCs with Rust-Oleum Commercial 5200 System DTM Acrylic. This multi-purpose, water-based coating adheres to metal without a primer and delivers long-lasting colour and gloss.

• **Withstands mild chemical fumes and spills**

- Resists chalking and fading
- For indoor/outdoor use in moderate industrial settings — on machinery, pipes, etc.
- Dries quickly — tack-free in 1-2 hours
- For optimum hiding over dark colours, apply a base coat of 5215402 Alumi-Non

COLOURS (3.79 L)

- ☐ **5275402** Bronzestone
- ☐ **5277402** Chestnut Brown
- ☐ **5227402** National Blue
- ☐ **5234402** John Deere Green
- ☐ **5235402** Vista Green
- ☐ **5237402** Forest Green
- ☐ **5256402** International Orange
- ☐ **5265402** Fire Hydrant Red
- ☐ **5282402** Silver Grey
- ☐ **5286402** Navy Grey
- ☐ **5288402** Machine Tool Grey
- ☐ **5274402** Semi-Gloss Black
- ☐ **5278402** Eggshell Black
- ☐ **5279402** Gloss Black
- ☐ **5290402** Eggshell White
- ☐ **5292402** Gloss White
- ☐ **5293402** Semi-Gloss White
- ☐ **5215402** Alumi-NON®

SAFETY COLOURS (3.79 L)

- ☐ **5225402** Safety Blue
- ☐ **5233402** Safety Green
- ☐ **5244402** Safety Yellow
- ☐ **5255402** Safety Orange
- ☐ **5264402** Safety Red
- ☐ **285062** Satin Safety Blue
- ☐ **285069** Satin Safety Green
- ☐ **285057** Satin Safety Yellow
- ☐ **285066** Satin Safety Orange
- ☐ **285059** Satin Safety Red

APPLICATION

SUBSTRATE

VOC g/l
VOC <250

Covers: 13.9-24.1 m²
(150-260 ft²) per 3.79 L

PRIMERS (3.79 L)

- ☐ **5269402** Red Primer
- ☐ **5281402** Grey Primer

TINT BASES (GLOSS) (3.43 L)

- ☐ **5207411** Masstone
- ☐ **5208418** Deep
- ☐ **5209417** Light

TINT BASES (SEMI-GLOSS) (3.43 L)

- ☐ **5217411** Masstone
- ☐ **5218418** Deep
- ☐ **5219417** Light

TINT BASES (EGGSHELL) (3.43 L)

- ☐ **5211411** Masstone
- ☐ **5212418** Deep
- ☐ **5213417** Light

URETHANE



- FOR USE ON:**
- Structural steel
 - Tanks
 - Pipes
 - Machinery

3300 SYSTEM
ACRYLIC ALIPHATIC
URETHANE

The 3300 System is a multi-purpose high gloss, two-component acrylic aliphatic polyurethane finish designed for interior or exterior use on properly primed surfaces in moderate to severe industrial environments.

This high performance, high gloss enamel is designed for use in an aggressive environment. The coating has very good chemical resistance and excellent colour and gloss retention making it ideal for outdoor equipment.

- Ideal for tanks, towers, metal equipment, etc. in moderate to severe industrial settings
- Excellent durability — heavy-duty rust, chemical, impact and abrasion resistance
- Excellent colour and gloss retention; high solids; thin-film application; one-coat coverage
- This is a two-component system — order base colour and activator separately

COLOURS (3.37 L)

- | | | |
|---|---------------|-----------------------|
|  | 206917 | Gloss Black |
|  | 207956 | Safety Yellow |
|  | 207957 | Safety Blue |
|  | 207958 | Safety Red |
|  | 206961 | Gloss White (16.85 L) |

TINT BASES (3.37 L)

- | | | |
|---|---------------|--------------------|
|  | 206876 | Masstone |
|  | 206877 | Deep |
|  | 206878 | White |
|  | 206963 | Masstone (15.64 L) |
|  | 206964 | Deep (15.64 L) |
|  | 206965 | White (15.64 L) |

APPLICATION



SUBSTRATE

METALCONCRETE

VOC g/l

VOC <250

Covers: 35.8-86.4 m²
(385-930 ft²) per 3.37 L



SPECIALTY



FOR USE ON:

- Rebar

RB1600 SYSTEM
GREEN REBAR EPOXY

Easily touch up rebar coatings on the job site with Rust-Oleum Industrial Choice® RB1600 System Green Rebar Epoxy Spray. This one-step, direct-to-metal coating provides long-lasting resistance to corrosion and chemicals.

- **Fast and easy to apply; minimal surface prep required**
- Dries to the touch in 15 minutes
- Prevents rust and metal stains in concrete

COLOURS (340 g)

■ 261937 Green Rebar

COMPANION PRODUCTS

243546 Spray Grip

241526 Comfort Grip

APPLICATION

SUBSTRATE

STEEL

VOC g/l

COMPLIANT NATIONWIDE



FOR USE ON:

- Railings
- Pool Decks
- Walkways
- Stairs and more

AS2100 SYSTEM
ANTI-SLIP AEROSOL

Add traction to slippery surfaces with Rust-Oleum Industrial Choice® AS2100 System Anti-Slip Spray. This high-performance formula sprays on easily and creates a tough, slip-resistant surface that helps prevent slips and falls.

- **Easier and less expensive per square foot than anti-slip tape; great for stairs, ramps, and more!**
- Resists cracking, peeling and mild chemicals; easy to touch-up or reapply
- Coefficient of friction = dry 0.72/wet 0.85

COLOURS (425 g)

■ AS2144838 Yellow

■ AS2185838 Grey

■ AS2178838 Black

■ AS2102838 Clear

APPLICATION

SUBSTRATE

CERAMIC

METAL

CONCRETE

WOOD



FOR USE ON:

- Damaged galvanized steel
- Production welds
- Fences and bridges
- Tanks, utility towers and more
- Vehicles and trailers
- Touch-up and repair

1600 SYSTEM
GALVANIZING COMPOUND

Touch up galvanized surfaces with Rust-Oleum Industrial Choice® 1600 System Galvanizing Compound Spray. This 93% pure zinc coating provides maximum corrosion resistance and excellent adhesion and durability on galvanized metal.

- **Dries fast – 20 minutes to the touch; withstands heat up to 93°C (200°F)**
- Use to touch-up/repair galvanized ducts, storage tanks, fences, gutters, etc.

COLOURS (396 g)

■ 1685830 Cold Galvanizing Compound

■ 244305 Bright Galvanizing Compound

COMPANION PRODUCTS

243546 Spray Grip

241526 Comfort Grip

APPLICATION

SUBSTRATE

GALVANIZED

VOC g/l

COMPLIANT NATIONWIDE

SPECIALTY



FOR USE ON:

- Gutters
- Roofs
- Flashing
- Ductwork
- PVC drains
- Masonry
- Concrete and more

LEAKSEAL™ FLEXIBLE
RUBBER SEALANT

LeakSeal is an easy-to-use flexible rubber sealant that dries to a semi-smooth, firm finish that will not sag or drip, and can be top-coated with latex or oil-based paints.

- **Fills and seals cracks instantly**
- Creates a water-tight, paintable surface

COLOURS (405 g)

■ 266288 Black

■ 266289 Clear

■ 269788 Grey

■ 269790 White

■ 269791 Brown

APPLICATION

SUBSTRATE

MASONRY

METAL

CONCRETE

WOOD



FOR USE ON:

- Gutters
- Roofs
- Flashing
- Ductwork
- PVC drains
- Masonry
- Concrete and more

LEAKSEAL™ FLEXIBLE
RUBBER SEALANT

LeakSeal Brush is an easy to use, rubberized protective utility coating designed to fill and seal leaks and cracks. It provides a water-tight, flexible seal that prevents moisture penetration, rust and corrosion.

- **High build formula that seals leaks and cracks instantly**
- Ideal for filling large problematic and hard-to-reach areas

COLOURS (946 mL)

■ 281045 Black

■ 281046 Clear

APPLICATION



SUBSTRATE

MASONRY

METAL

CONCRETE

WOOD

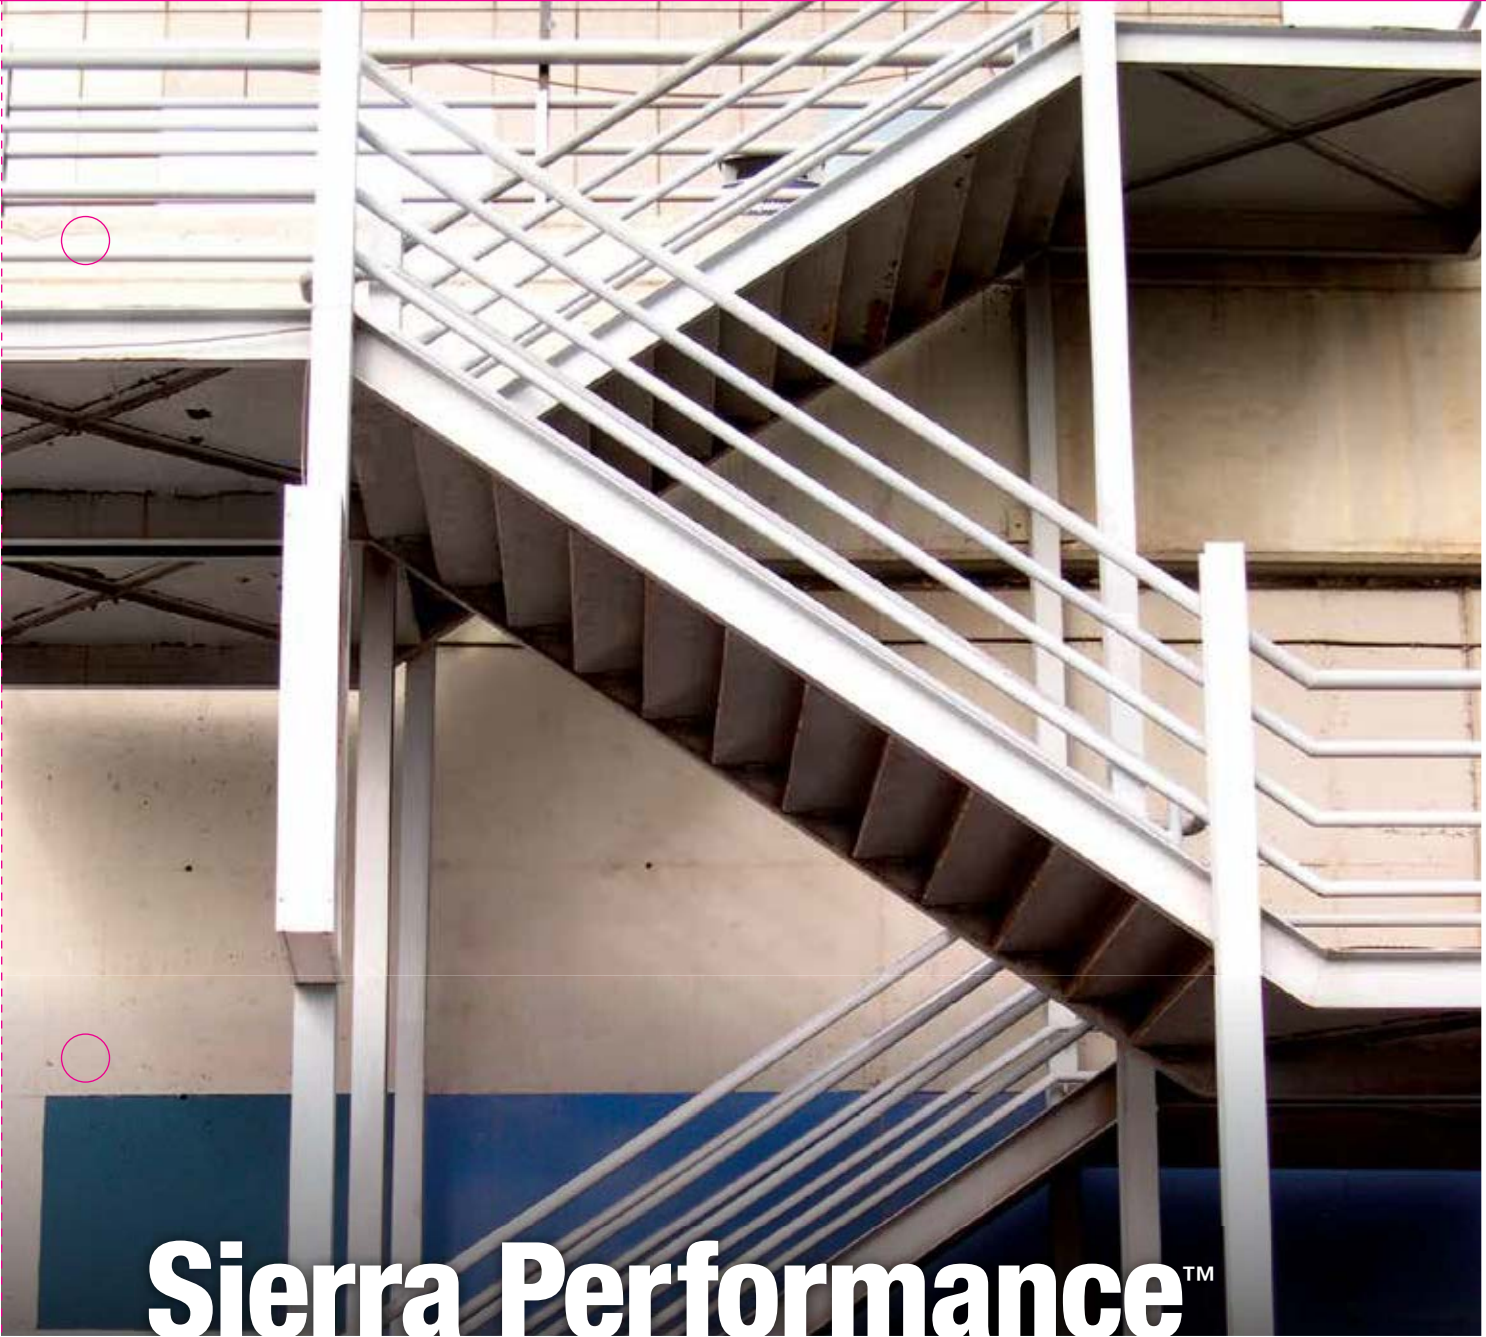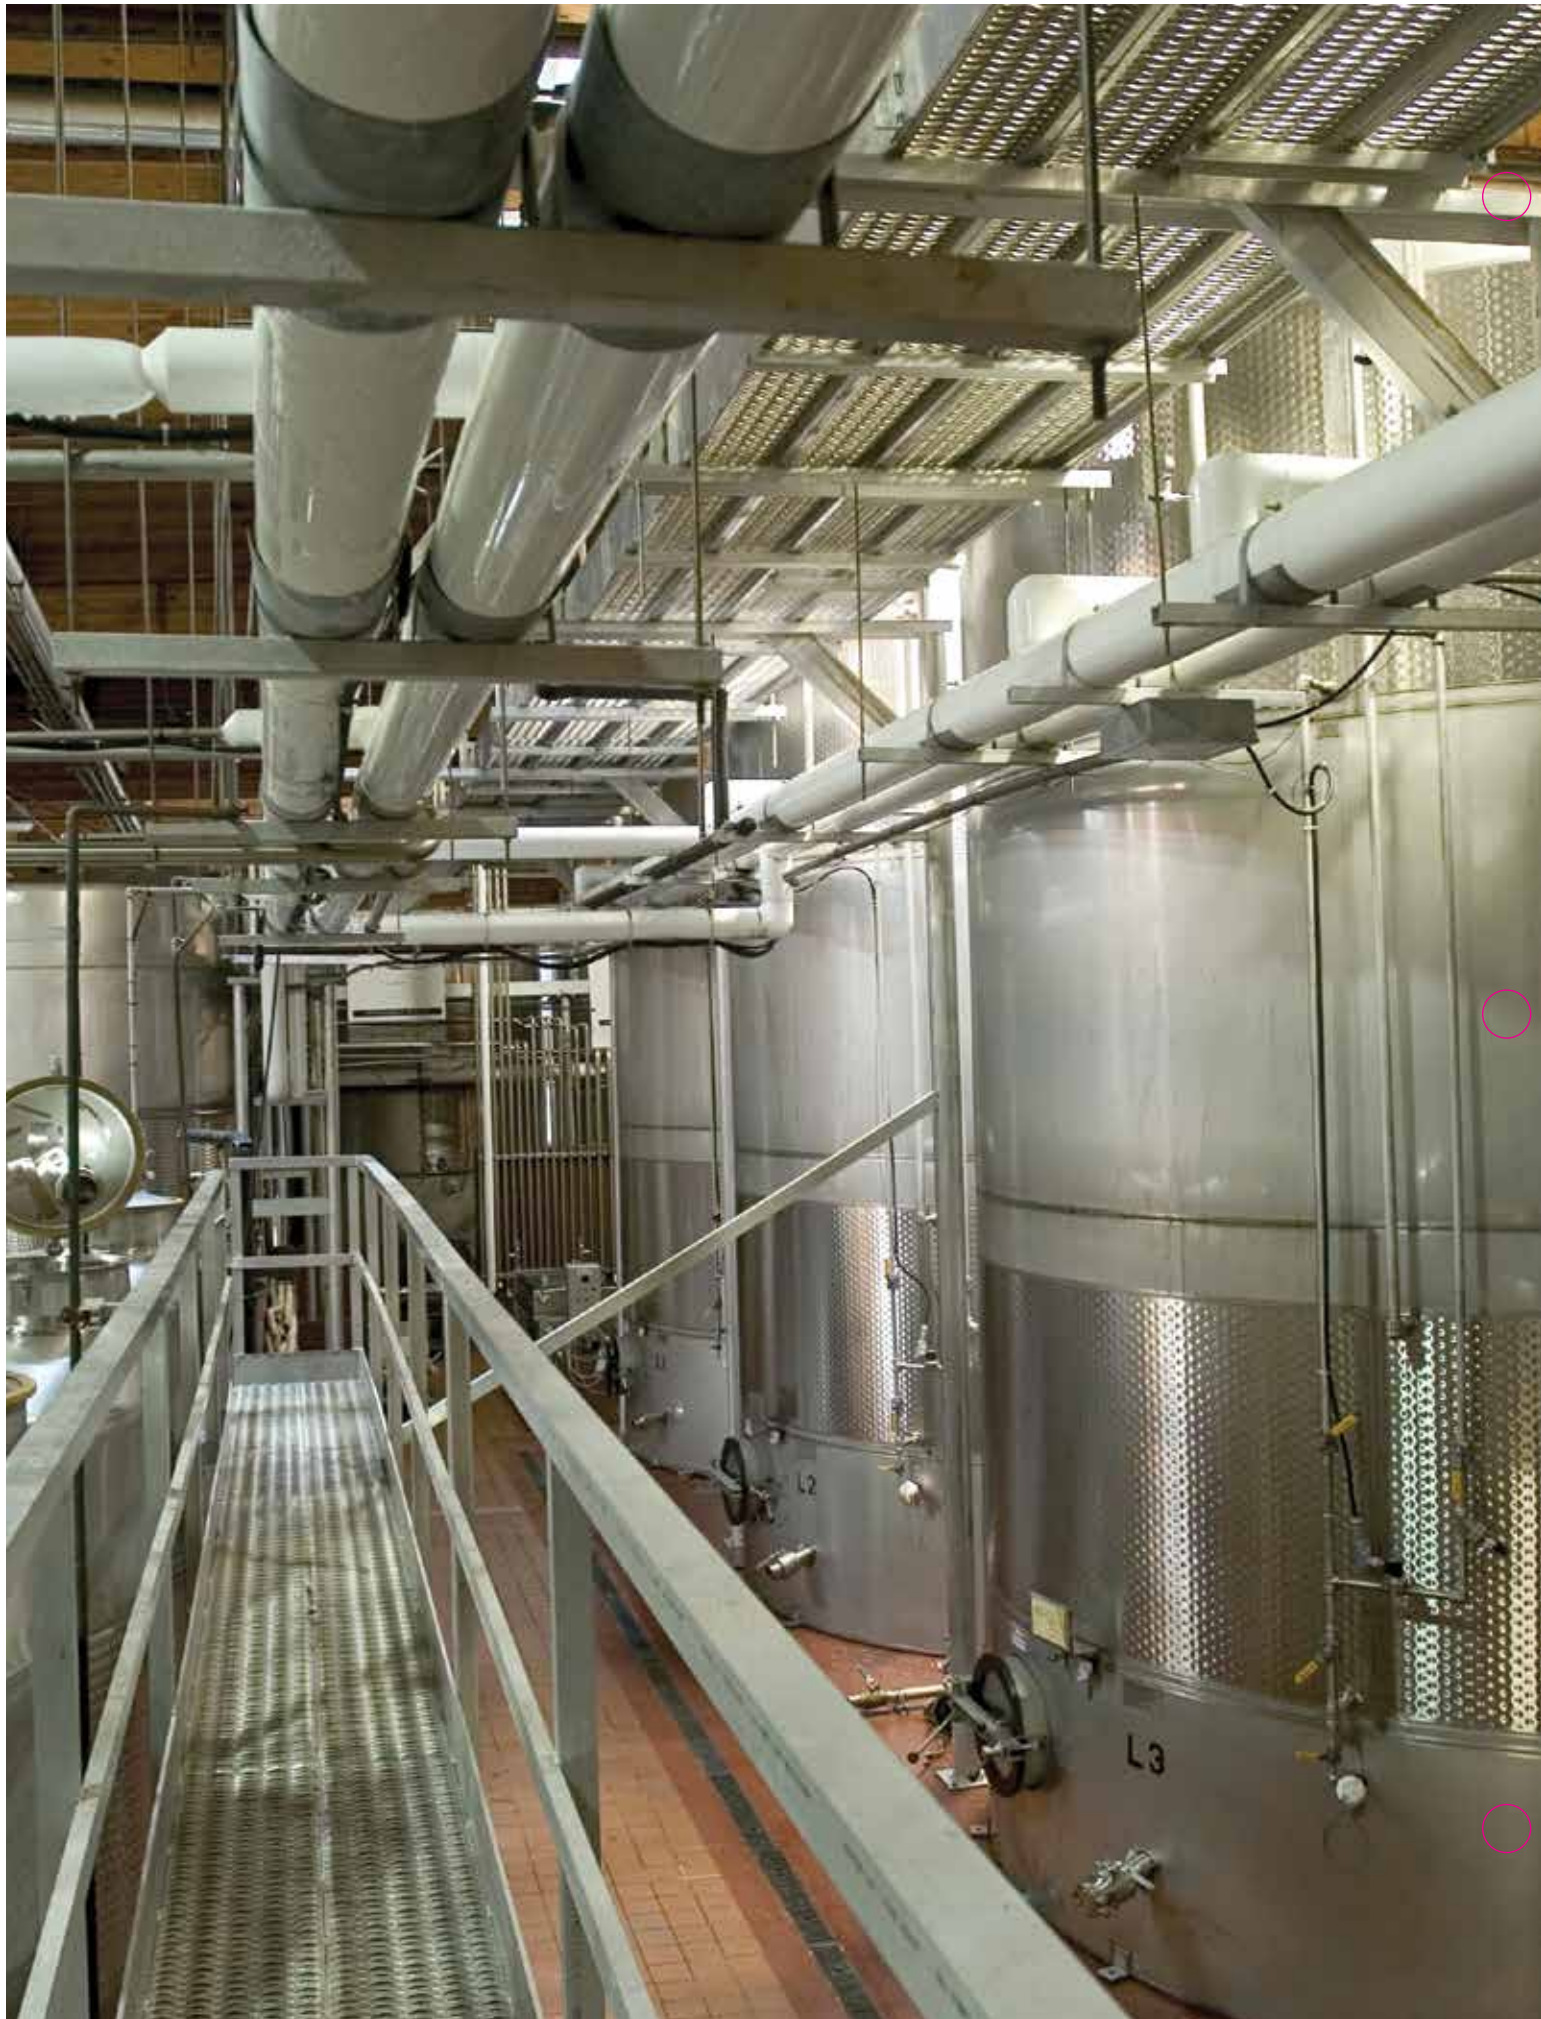

Sierra Performance™

Get all the industrial performance you need — with low VOCs, low hazardous air pollutants, and low odour. Discover environmentally friendly alternatives to traditional, solvent-based coatings.



ACRYLIC



FOR USE ON:

- Anywhere paint odours or VOC is a concern
- Food and beverage plants
- Schools, healthcare and warehouses
- Food service, office buildings and hotels
- Concrete, masonry and metal
- Galvanized steel, plastic and wallboard
- Wood, plaster and stucco
- Previously coated surfaces

ACRYLIC PRIMER

Get outstanding adhesion on difficult-to-paint surfaces — plus low VOCs — with Rust-Oleum Sierra Performance™ Acrylic Primer. This water-based formula contains low VOCs, low HAPs1 and no solvent odour. It is ideal for settings where paint fumes are an issue.

- **Promotes adhesion on smooth/slick surfaces**
- Also ideal for general-purpose priming; for interior/exterior use
- Dries fast — 30 minutes to touch and tack free; immediately sandable when dry
- Provides excellent stain-blocking power; tolerates pH levels up to 13
- Top coat with Beyond™ enamel. For steel substrates, prime with MetalMax™

COLOURS (3.79 L)

- 208028 White (tintable)
- 208555 Grey

APPLICATION

SUBSTRATE

METAL* GALVANIZED

CONCRETE WOOD

MASONRY

VOC g/l

VOC <100

COMPLIANT NATIONWIDE

Covers: 16.7-50.6 m² (180-545 ft²) per 3.78 L

*Non-Ferrous



FOR USE ON:

- Anywhere paint odours or VOC are a concern
- Food and beverage plants
- Schools, healthcare and warehouses
- Food service, office buildings and hotels
- Walls, doors and cabinets
- Trim, furniture, equipment and tanks

BEYOND™ ACRYLIC ENAMEL

Achieve a smooth, professional finish — with low VOCs — using Rust-Oleum Sierra Performance™ Beyond™ Acrylic Enamel. This water-based formula contains low VOCs, low HAPs1 and no solvent odour. It is ideal for schools, cafeterias and settings where paint fumes are an issue.

- **Superior resistance to chipping, cracking and peeling; excellent colour retention**
- Fast, convenient, single-component system — dries in 30 minutes
- Impervious to moisture; easily cleaned and sanitized
- For interior/exterior use on primed or painted metal, concrete, masonry, wood, drywall, tile
- Achieve maximum performance by starting with MetalMax® or Griptec™ primers

COLOURS (SATIN) (3.79 L)

- 208048 Black
- 210479 Clear
- 238749 White

COLOURS (GLOSS) (3.79 L)

- 208058 Black
- 210491 Clear
- 238748 White
- 238750 Navy Grey

TINT BASES (SATIN) (3.67 L)

- 208050 White Pastel Base
- 208052 Tint Base
- 208054 Deep Base
- 208056 Accent Base

TINT BASES (GLOSS) (3.67 L)

- 208040 White Pastel Base
- 208042 Tint Base
- 208044 Deep Base
- 208046 Accent Base

SAFETY COLOURS (GLOSS) (3.79 L)

- 210493 Safety Red
- 210495 Safety Yellow

APPLICATION

SUBSTRATE

STEEL MASONRY

CONCRETE WOOD

DRYWALL TILE

VOC g/l

VOC <100

COMPLIANT NATIONWIDE

Covers: 15.3-48.3 m² (165-520 ft²) per 3.79 L

ACRYLIC



FOR USE ON:

- Anywhere paint odours or VOC is a concern
- Food & beverage plants
- Schools, healthcare & warehouses
- Food service, office buildings & hotels
- Metal structures, handrails & fencing
- Line equipment & machinery

METALMAX® DTM ACRYLIC ENAMEL

Get excellent corrosion protection — plus low VOCs — with Rust-Oleum Sierra Performance™ MetalMax® DTM Acrylic Enamel. This water-based formula contains low VOCs, low HAPs1 and no solvent odour. It is ideal for schools and settings where paint fumes are an issue.

- **Superior resistance to corrosion and humidity; excellent color retention**

- Fast, convenient, single-component system — dries in 30 minutes
- Results in a smooth, washable, professional finish
- Applies direct-to-metal (DTM), including galvanized steel and aluminum; for interior/exterior use

COLOURS

(SEMI-GLOSS) (3.79 L)

- 208039 Black
- 238752 White
- 238754 Navy Grey

COLOURS (SATIN) (3.79 L)

- 282540 Black
- 282539 White

SAFETY COLOURS

(SEMI-GLOSS) (3.79 L)

- 210477 Safety Yellow
- 210475 Safety Red
- 238753 Safety Blue

PRIMERS

- 238755 Grey Primer

TINT BASES

(SEMI-GLOSS) (3.67 L)

- 208031 White Pastel Base
- 208033 Tint Base
- 208035 Deep Base
- 208037 Accent Base

TINT BASES (SATIN) (3.67 L)

- 282538 Pastel Base
- 282459 Tint Base
- 282537 Deep Base
- 282536 Accent Base

ALSO available in 18.9 L pails.

APPLICATION

SUBSTRATE

STEEL GALVANIZED

ALUMINUM

VOC g/l

VOC <100

COMPLIANT NATIONWIDE

Covers: 16.7-50.6 m² (180-545 ft²) per 3.67 L



EPOXY



FOR USE ON:

- Food and beverage plants
- Schools, healthcare and warehouses
- Food service, office buildings and hotels
- Equipment, machinery and steel surfaces
- General maintenance

S70 SYSTEM WATER-BASED EPOXY PRIMER

For added protection with Sierra Performance™ epoxies, start with Rust-Oleum Sierra Performance™ S70 Water-based Epoxy Acrylic Primer. This water-based primer contains low VOCs, HAPs1 or solvent odour and is ideal for settings where fumes are an issue.

- **Increases the performance of Sierra Performance™ epoxies**
- Specially formulated for brush or roller application; dries fast — 30 minutes to touch
- Superior adhesion, outstanding resistance to chemicals and corrosion
- Easy-to-use, two-component system — order base and activator separately

PRIMERS

- BRUSH:** ☐ 208110 White (1.89 L)
- SPRAY:** ☐ 208113 Grey (1.89 L)

ACTIVATOR

- 208112 S70 Activator (1.89 L)

APPLICATION

SUBSTRATE

STEEL

GALVANIZED

ALUMINUM

WOOD

MASONRY

CONCRETE

VOC g/l

VOC <100

COMPLIANT NATIONWIDE

Covers: 18.6-27.9 m²
(200-300 ft²) per 1.89 L



FOR USE ON:

- Food and beverage plants
- Schools, healthcare and warehouses
- Food service, office buildings and hotels
- Equipment, machinery and steel surfaces
- General maintenance
- Areas subject to frequent washdowns

S60 SYSTEM WATER-BASED EPOXY MAINTENANCE COATING

Get exceptional surface protection — and low VOCs — with Rust-Oleum Sierra Performance™ S60 Water-based Epoxy Maintenance Coating. This water-based kit contains low VOCs, low HAPs1 and no solvent odour. It creates a tough, high-gloss finish.

- **High-performance coating—ideal for surfaces that are subjected to frequent wash-downs**
- Impervious to moisture; easily cleaned and sanitized
- Dries fast — 30 minutes to touch, return to service in 24 hours
- Easy-to-use, two-component kit — includes coloured base and activator
- Achieve maximum performance by starting with an S70 primer

APPLICATION

SUBSTRATE

CONCRETE

MASONRY

WOOD

VOC g/l

VOC <50

COMPLIANT NATIONWIDE

Covers: 21.4-31.6 m²
(230-340 ft²) per 1.27 L

KITS

- ☐ 248285 Stone Grey
- ☐ 248287 OSHA Safety Red
- ☐ 248288 OSHA Safety Yellow
- ☐ 248291 OSHA Safety Blue
- ☐ 248289 Oyster White
- ☐ 248290 Black
- ☐ 251173 Dunes Tan
- ☐ 251212 Classic Grey

COLOURS (GLOSS) (1.27 L)

- ☐ 208066 Clear
- ☐ 208072 Classic Grey
- ☐ 208076 Tile Red
- ☐ 208078 Dunes Tan
- ☐ 248277 Stone Grey
- ☐ 248282 Black

COLOURS (SATIN) (1.89 L)

- ☐ 208090 Classic Grey
- ☐ 208084 Clear

SAFETY COLOURS (GLOSS) (1.25 L)

- ☐ 248299 OSHA Safety Red
- ☐ 248280 OSHA Safety Yellow
- ☐ 248283 OSHA Safety Blue

TINT BASES (GLOSS) (1.25 L)


- ☐ 248273 White Pastel Base
- ☐ 248274 Tint Base
- ☐ 248275 Deep Base
- ☐ 248276 Accent Base


TINT BASES (SATIN) (1.66 L)

- ☐ 282601 Deep Base
- ☐ 282602 Pastel Base
- ☐ 282600 Accent Base

ACTIVATORS (2.54 L)

- 248284 Gloss Activator
- 283742 Satin Activator

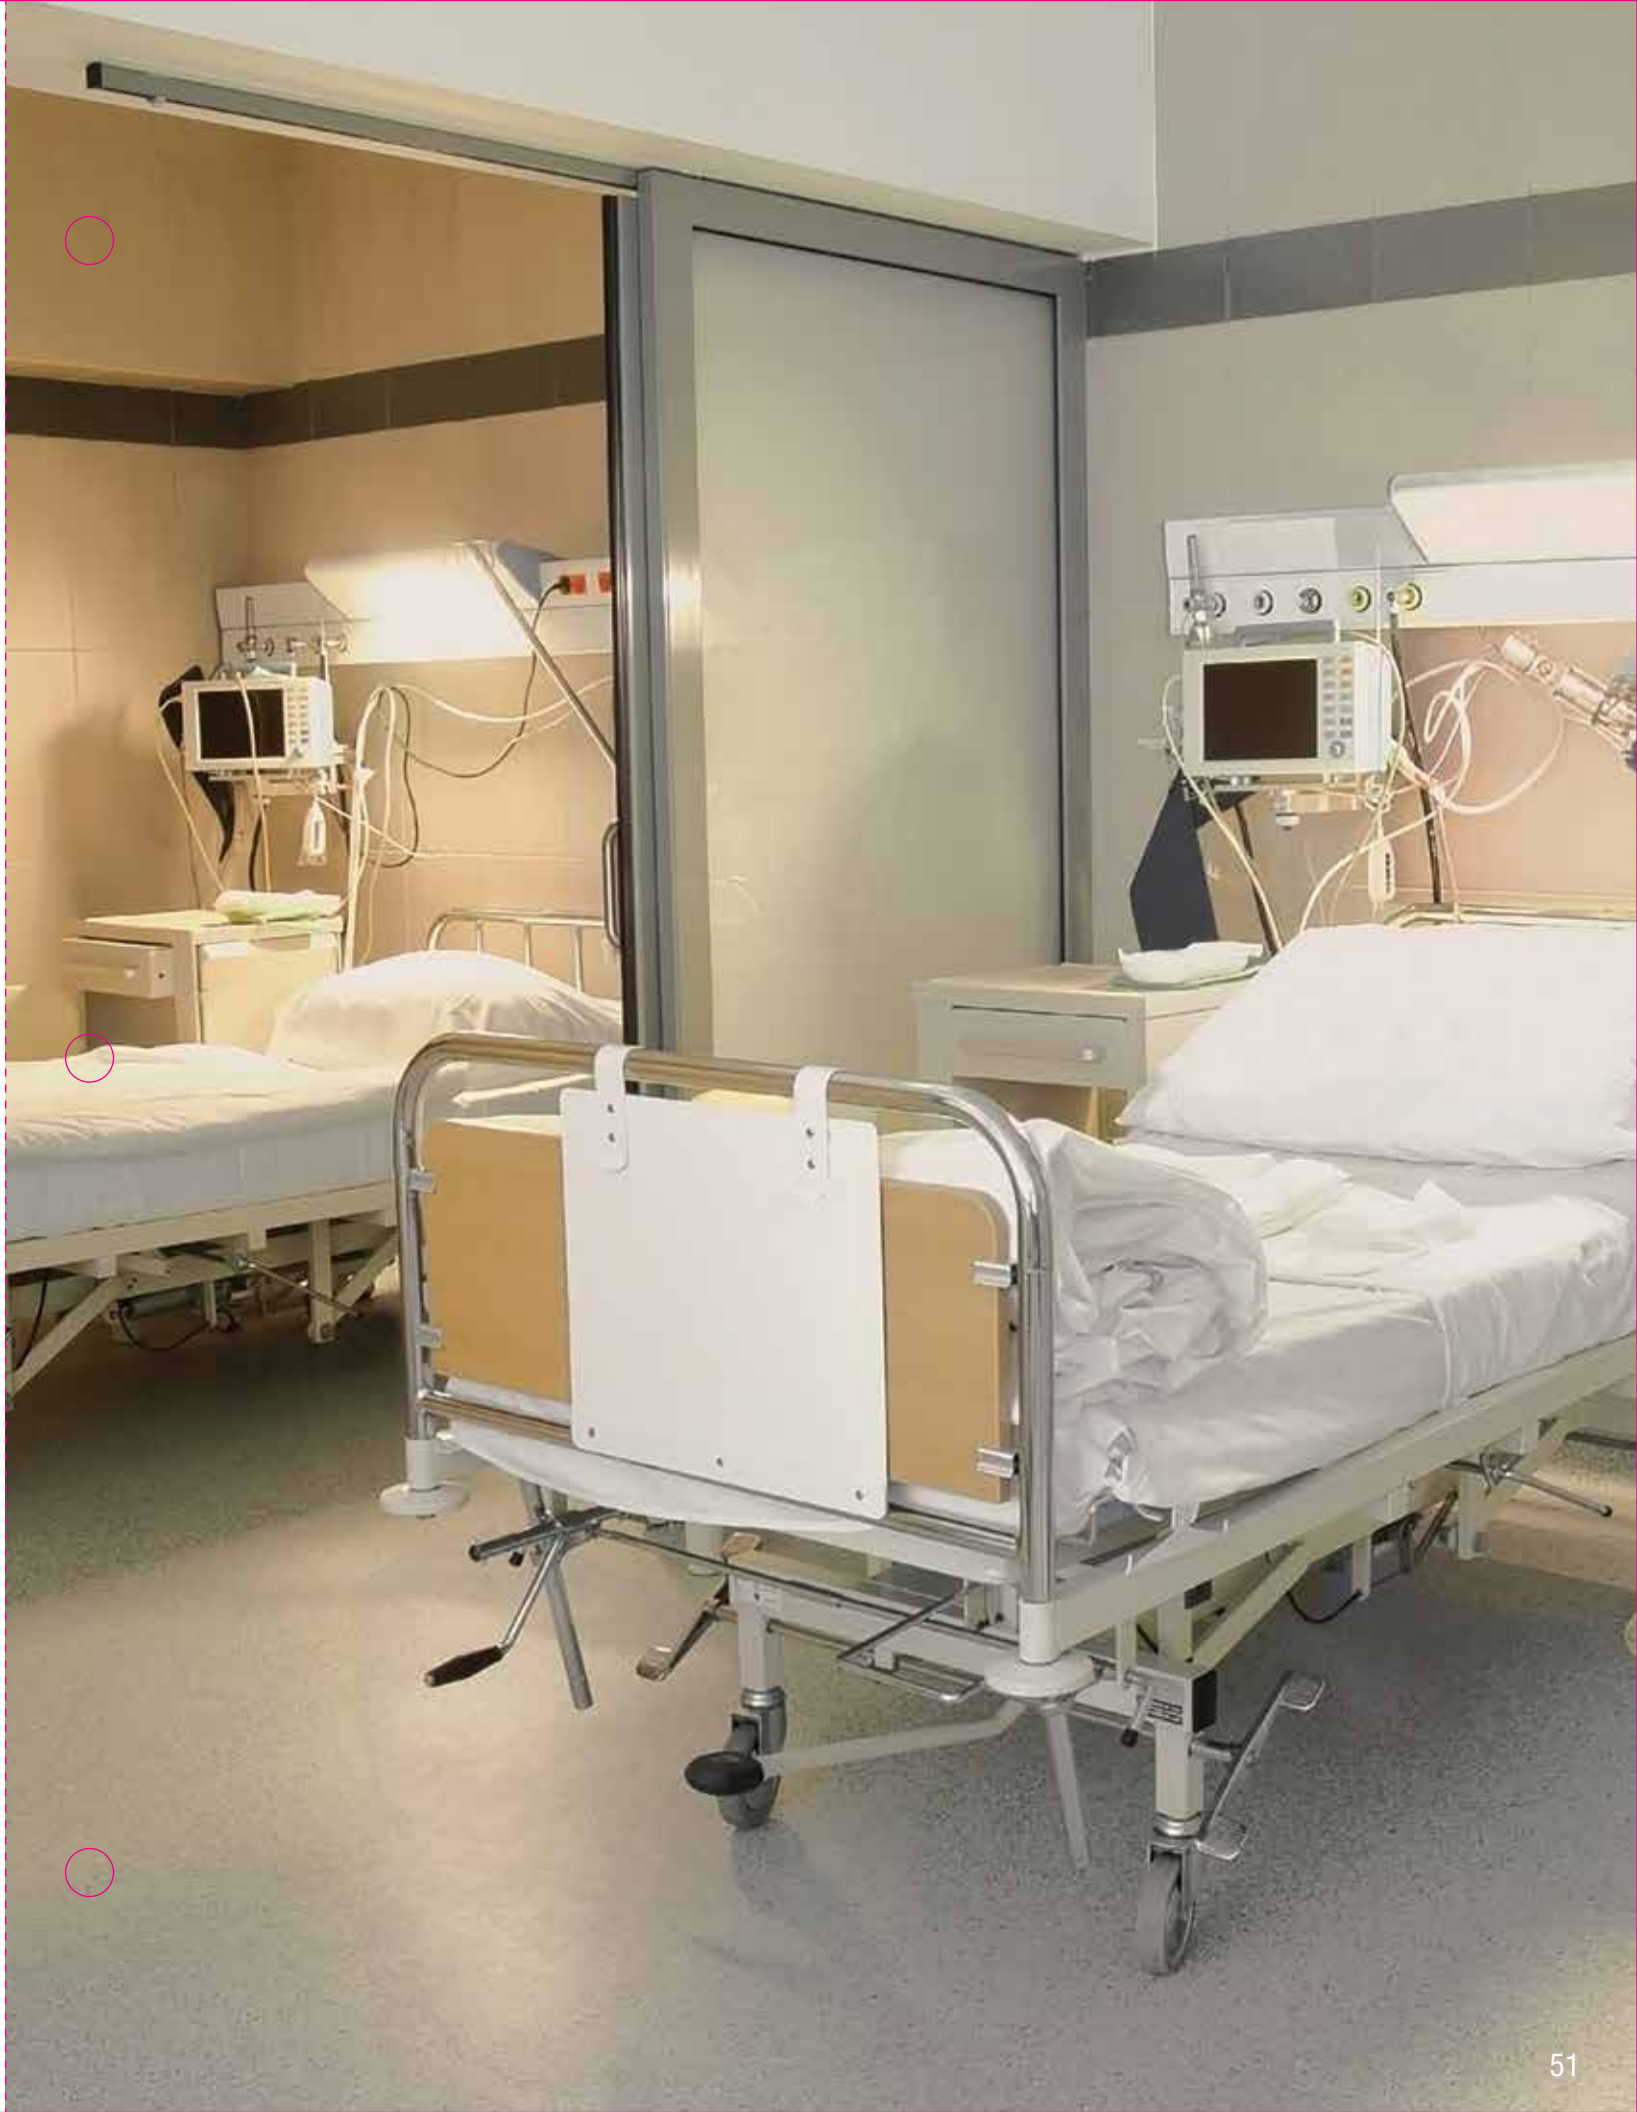

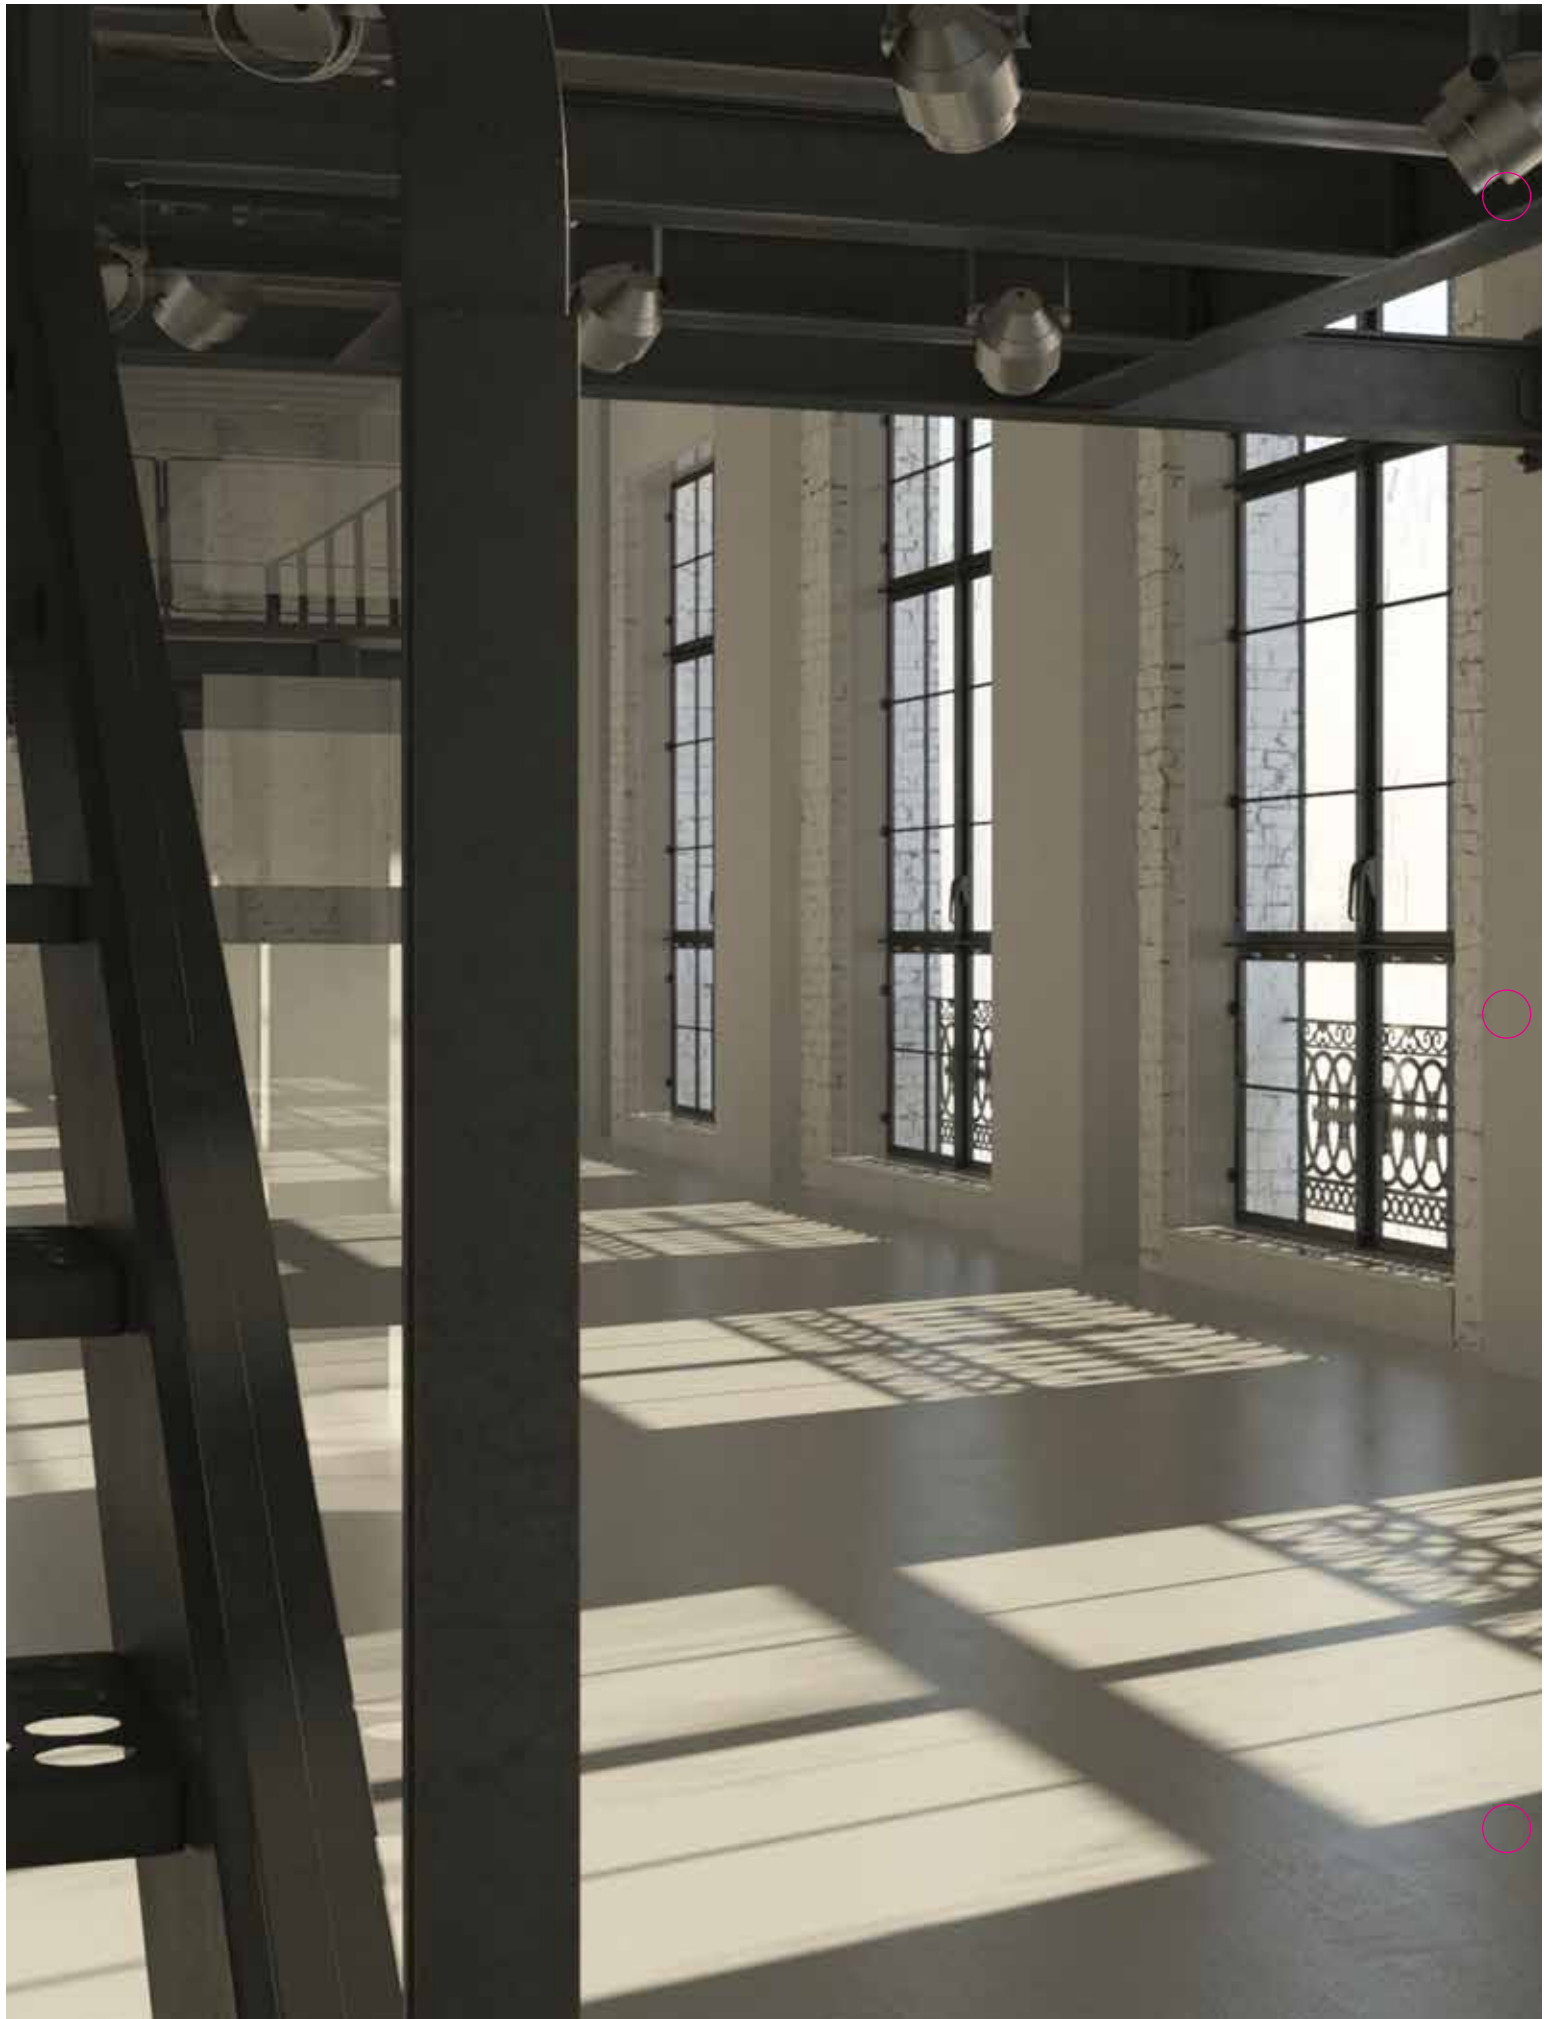

Concrete Prep, Patch & Repair

Rust-Oleum's expertise in surface protection doesn't stop at metal. Our complete selection of concrete prep, patch and repair products are formulated to deliver contractor-grade protection and are easy to apply using in-house maintenance crews. Our concrete repair products cure fast to minimize downtime and provide lasting durability for long-term protection.





FOR USE ON:

- Spalled or damaged concrete floors
- Curbs, ramps and walkways
- Decks and traffic routes

TURBOKRETE® CONCRETE PATCHING COMPOUND

High performance, 100% solids epoxy patch kit repairs damaged concrete, fills deep holes, and protects against abrasion, impact and most chemicals.

- **Restores damaged curbs and severely spalled floors**
- 3-4 times stronger than concrete
- Easy-mix, trowel — applied fast-cure formula
- Dries quickly — return to service in 1½-4 hours for light traffic and 6-8 hours for heavy traffic
- For indoor and outdoor use

SIZE (2 gallon)

■ 253479 Light Grey kit (.15 cu. ft.)

SIZE (3.5 gallon)

■ 5494323 Light Grey kit (.30 cu. ft.)

APPLICATION

SUBSTRATE

CONCRETE



FOR USE ON:

- Interior and exterior concrete
- Spalls and leaks on vertical, horizontal or overhead surfaces
- Also great as an adhesive

TURBOKRETE® ALL-PURPOSE EPOXY REPAIR

The ultimate 100% solids non-sag epoxy repair.

- **Easy-to-use — convenient 2K cartridge**
- Superior non-sag formula excellent for bridging horizontal or vertical cracks, even under water
- Twice as strong as concrete
- Works on concrete, masonry, brick, steel and more
- Low odour, low VOC
- For indoor or outdoor use

CARTRIDGE (9 oz.)

■ 257395 Light Grey

COMPANION PRODUCTS

- 257397 Replacement Static Mixers (pack of 3)
- 261292 Heavy-Duty Caulk Gun

APPLICATION

SUBSTRATE

CONCRETE CERAMIC MASONRY STEEL TILE



FOR USE ON:

- Control joints, saw cuts and interior expansion joints

FLEXIBLE JOINT SEALANT

High performance two component polyurea designed for floor joints. Self-leveling fast-cure formula with over 80% elongation can withstand 10-15% movement in the floor.

- **Cures in 90 minutes**
- Can be applied down to -40°C (-40°F)
- For indoor or outdoor use

CARTRIDGE

266733 22 oz.
261998 9 oz.

COMPANION PRODUCTS

- 257397 Replacement Static Mixers (pack of 3)
- 261292 Heavy-Duty Caulk Gun for 9 oz.

APPLICATION

SUBSTRATE

CONCRETE



FOR USE ON:

- Cracked or damaged concrete floors

5499 SYSTEM CONCRETE PATCHING COMPOUND

100% solids epoxy patch kit specially formulated for repairing small holes or pores.

- **Works on concrete, wood, fiberglass and brick with no priming**
- Up to 1 hour working time
- Virtually odour-free
- For indoor or outdoor use
- 3 times stronger than concrete

AVAILABLE PRODUCTS

5499499 2 Gallon Kit (Base and Activator)

APPLICATION

SUBSTRATE

CONCRETE



FOR USE ON:

- Interior and exterior horizontal concrete cracks
- Spalls and pitting in mild to severe industrial environments
- Warehousing
- Food and beverage
- Manufacturing

INSTAPATCH®

InstaPatch is an ultra rapid curing concrete repair system. Two-component 100% solids polyurea repair compound. Dries fast for quick return to service.

- **Low viscosity, rapid-cure rigid patching**
- Cures in 15 minutes or less
- Can be poured into cracks or formed into a slurry and trowel applied
- Can be applied down to -20°C (-5°F)
- Low odour

AVAILABLE PRODUCTS

- 276981 Grey 1 Gallon Kit
- 284595 Tile Red 1 Gallon Kit
- 288395 Grey 16 oz Kit
- 288391 Tile Red 16 oz Kit



APPLICATION

SUBSTRATE

CONCRETE



FOR USE ON:

- Driveways
- Walkways
- Stairs
- Walls

PUTTY PATCH™

Putty Patch™ is a fast-setting general purpose cement-based patching material. A proprietary blend of Portland cements, aggregates and additives that achieves initial set in 10-15 minutes and final set in 20-25 minutes.

- **Can be moulded, shaped and shaved**
- Stronger than concrete
- Easy-to-use; well suited for interior or exterior applications
- Ideal for vertical and overhead repairs
- Repairs concrete cracks and holes up to 18 cm (7") deep in one application

AVAILABLE PRODUCTS

■ 291995 Grey 3 lb. pkg.

APPLICATION

SUBSTRATE

CONCRETE



FOR USE ON:

- Concrete

POURABLE CONCRETE PATCHING COMPOUND

Makes repairing large holes and spalls easier than ever before. It has a fibre reinforced, easy-to-mix, pourable material for quick repairs to level concrete surfaces.

- **Just add to water, mix and pour**
- Fast-drying — Foot traffic in 30 minutes and vehicle traffic in 2 hours
- Sets at low temperatures (down to 4°C [40°F])
- Can be applied from feather edge up to 4 inches in a single application
- Suitable for interior and exterior applications
- Odourless, non-toxic, non-hazardous formula

AVAILABLE PRODUCTS

291070 Grey (18.9 L)

APPLICATION

SUBSTRATE

CONCRETE



FOR USE ON:

- New or old bare concrete floors

ECO PRIME™

ECO Prime is a 100% solids fast-curing polyurea primer for use on concrete floors in industrial and commercial facilities.

- **Use with Rust-Oleum's polyurea products for the ultimate floor in 24 hours**
- Topcoat in 1-4 hours
- Excellent coverage — 2 gallon kit covers up to 130 m² (1400 ft²)
- Penetrates and seals for long-lasting protection
- Convenient kit packaging

AVAILABLE PRODUCTS

281631 2 Gallon



APPLICATION

SUBSTRATE

CONCRETE

Covers: 46.5-65 m²
(500-700 ft²) per 3.78 L



FOR USE ON:

- Unfinished concrete floors

108 CLEANING & ETCHING SOLUTION

Dual action solution — cleans and etches.

- **Helps dissolve grease, dirt and oil; then etches concrete for improved coating adhesion**
- Covers approximately 400 sq. ft. of concrete with just one pre-mixed, ready-to-use gallon

AVAILABLE PRODUCTS

108402 Cleaning & Etching Solution

APPLICATION

SUBSTRATE

CONCRETE

Covers: 37.6 m²
(400 ft²) per 3.78 L



FOR USE ON:

- Interior concrete or tile floors in mild to moderate industrial and commercial environments

HARD SURFACE PRIMER

Hard Surface Primer is a two component, water-based epoxy primer designed to improve the adhesion of paints and coatings to difficult substrates.

- **Minimal prep for hard to coat surfaces like; sealed and hard troweled concrete, VCT and ceramic tile**
- Add longevity to line striping
- Topcoat window (8 hours to 7 days without sanding)
- Zero VOC
- Compatible with most Rust-Oleum coatings

AVAILABLE PRODUCTS


313973 120 fl. oz. kit

APPLICATION

SUBSTRATE

CONCRETE

Covers: 23.2-32.5 m²
(250-350 ft²) per 3.78 L

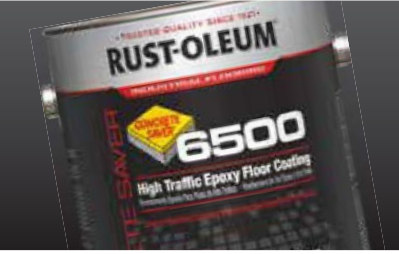

FOR USE ON:

- New, old, bare or previously coated concrete floors
- Warehouses
- Labs and more

S6511 SYSTEM PENETRATING PRIME & SEAL PRIMER

This clear, high-solids primer penetrates deeply to seal pinholes and cracks, improve adhesion and form an extra layer of protection.

- **Increases the performance of top-coats**
- Reduces the risk of bubbles and outgassing in topcoat
- Penetrates bare concrete to secure a strong bond between the concrete and top coat
- Improves resistance to abrasion, impact and chemical spills

AVAILABLE PRODUCTS

S6511413 Base (0.6 gallons in a 1 gallon container)

S6502410 Activator (0.6 gallons in a 1 gallon container)

APPLICATION

SUBSTRATE

CONCRETE

Covers: 16.7-24.2 m²
(180-260 ft²) per 3.78 L



FOR USE ON:

- Sidewalks, driveways, walkways, stairs, patios, basements, garages, retaining walls

ROCKSOLID®
MOISTURE STOP™


RockSolid Moisture Stop penetrates deep into the concrete unlike paints and surface sealers. The deep penetration fills the pores of the concrete and chemically reacts with the minerals forming a silicate mineral. Moisture Stop prevents salt damage, radon gas, and moisture, and retains the look of natural concrete.

• Use as a primer prior to coatings

- Bonds and seals
- Protects against water seepage and radon gas emissions

AVAILABLE PRODUCTS

287670 Clear (3.78 L)



FOR USE ON:

- Previously coated or sealed concrete floors in garages, carports, basements, laundry rooms, and other interior surfaces
- May be applied to bare, etched concrete

RUST-OLEUM®
GARAGE & INTERIOR
FLOOR PRIMER


Rust-Oleum® Garage & Interior Floor Primer is an easy to use, revolutionary technology which allows you to coat over a previously coated or sealed concrete floor without having to scuff, sand, or grind the surface. Transform your worn garage or basement floor with any Rust-Oleum floor coating (including water and solvent base).

• Simply Clean, Prime & Coat! No peel promise!

- No sanding or grinding is required
- Topcoat with any floor coating RockSolid®, EpoxyShield®

AVAILABLE PRODUCTS

348098 Grey (3.78 L)



WATER-BASED TOPSIDE
VAPOUR BARRIER

Water-based TVB is a two-component epoxy primer for concrete floors.

• Excellent adhesion to moisture laden slabs and can be used to remedy concrete floors with high moisture levels before the application of the finish coating

- Water-based TVB is ph resistant and capable of holding back up to 12 lbs. of MVT (Moisture Vapour Transmission) with a two coat application
- TVB Water-based Topside Vapour Barrier can be applied to damp or green concrete

This is a two-component system. Order base and activator separately.

WATER-BASED

277494 Part A Resin (54 fl oz in a one gallon container)

278268 Part B Activator (74 fl oz in a one gallon pail)

Water-Based Covers: 250 sq. ft./gal

100% SOLIDS TOPSIDE
VAPOUR BARRIER

TVB 100% Solids Topside Vapor Barrier is a two component, 100% solids epoxy primer for concrete floors designed for floors with the most severe MVT (Moisture Vapor Transmission) problems.

• Excellent adhesion to moisture laden slabs and can be used to remedy concrete floors with high moisture levels before the application of the finish coating

- pH resistant and capable of holding back up to 25 lbs. of MVT in a single application*
- Use under coatings, wood flooring, carpeting or anywhere there is a MVT problem

*Must be applied over a properly prepared shot blasted floor

This is a two-component system. Order base and activator separately.

100% SOLIDS

278269 Base (3 gallons in a 5 gallon pail)

277500 Activator (2-1 gallon pouches in a carton)

100% Solids Covers: 80-100 sq. ft./gal

CONCRETE PREP, PATCH & REPAIR TECHNICAL DATA

The data contained in this chart is presented for the comparison of basic physical characteristics of Concrete Saver Floor Coatings. For more detailed information, see Rust-Oleum technical data sheets for individual products.	RECOMMENDED FILM THICKNESS				PERCENT VOLUME SOLIDS	COVERAGE				DRY TIME HRS. AT 21°C (70°F)– 27°C (80°F) & 50% HUMIDITY				THINNING AS NEEDED			CLEAN-UP	MIX RATIO / ACTIVATOR NO.	POT LIFE HRS. AT 21°C (70°F)–27°C (80°F) & 50% HUMIDITY	DRY HEAT RESISTANCE (°C/°F)	VOC LEVEL (g/l) VOLATILE ORGANIC COMPOUND	FLASH POINT (°C/°F)	APPLICATION TEMPERATURE RANGE
	WET		DRY			PRACTICAL ASSUMES 15% MATERIAL LOSS		THEORETICAL AT 1 MIL DFT.		TACK-FREE	HANDLE	RECOAT	TRAFFIC	BRUSH / ROLLER	AIRLESS SPRAY	AIR-ATOMIZED SPRAY							
	MILS	MICRONS	MILS	MICRONS		ft. ² /gal.	m ² /l	ft. ² /gal.	m ² /l														
TurboKrete Concrete Patching Compound	—	—	—	—	100	.15-30 cu. ft.	—	—	—	—	—	2-4	15-8	—	—	—	160402	—	½	—	N/A	85°C 185°F	7-32°C 45-90°F
TurboKrete All-Purpose Epoxy Repair	—	—	—	—	—	*	—	—	—	2	—	2	2	—	—	—	—	1:1	—	—	—	—	—
Flexible Joint Sealant	—	—	—	—	—	**	—	—	—	45 min	—	90 min	90 min	—	—	—	—	1:1	—	—	—	—	—
5499 System – Concrete Patching Compound	—	—	—	—	94	12.5	.3	—	—	2-3	—	16	16-72	—	—	—	160402	1:1	5/6	60°C 140°F	N/A	60°C 140°F	10-38°C 50-100°F
InstaPatch® Concrete Repair System	—	—	—	—	—	230 lin. ft.	—	—	—	5 min	—	—	30 min	—	—	—	—	—	—	—	—	—	—
108 Cleaning & Etching Solution	—	—	—	—	—	400	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
S6511 System – Penetrating Prime & Seal Primer	6-9	—	5.5-8	—	89	180-260	44-64	1430	35.1	6-8	—	8-24	—	—	—	—	—	15:1	1/2	—	250	—	—
ECO Prime Polyurea Primer	—	—	—	—	100	500-700	—	—	—	1-2	—	1-12	—	—	—	—	—	—	—	—	10	—	—
100% Solids – Topside Vapour Barrier	16	400	16	400	100	80-100	—	—	—	—	—	12-14	—	—	—	—	—	3:2	20-30 min	—	0	—	10-38°C 50-100°F
Water-Based – Topside Vapour Barrier	6.4	160	—	—	50	250	—	—	—	—	—	5-8	—	—	—	—	—	1:1.2	1 hr	—	0	—	15.5-26.6°C 60-80°F

*Practical Coverage - 10.56 linear ft., 1/2" deep x 1/4" wide

**Practical Coverage - 13.3 feet, 1/4" joint x 1" deep



Floor Coatings

Rust-Oleum's diverse product offering provides a cost effective, durable solution for every industry and every environment. Our range of products include Concrete Saver and Sierra Performance brands for application using in-house crews, to Concrete Protection Systems coatings and toppings for professional contractors. Whatever the floor coating project, Rust-Oleum has the right solution for you.





FOR USE ON:

- Interior and exterior concrete floors
- Walkways
- Decks and patios in mild industrial and commercial environments exposed to heavy and light rubber wheeled traffic

5600 SYSTEM
ACRYLIC URETHANE
FLOOR PAINT

Spruce up your floor with low odour, roll and go floor paint.

- **Protects concrete floors from dusting, water damage and staining**
- Provides a mildew resistant coating
- Use for improved aesthetics, 5S, safety and organization markings and for easy maintenance
- Convenient, ready-to-use with no measuring or mixing
- Excellent coverage over new and previously coated surfaces
- Accepts next day foot traffic

COLOURS

	261117	Safety Blue		251286	Safety Yellow
	261118	Safety Green		251289	White
	261116	Safety Orange		251291	Silver Grey
	261115	Safety Red			

APPLICATION

SUBSTRATE

VOC g/l

VOC <100

COMPLIANT
NATIONWIDE

Covers: 15.8-37.2 m²
(170-400 ft²) per 3.78 L



FOR USE ON:

- Steel beams, structural steel and towers
- Concrete floors and conveyors
- Industrial equipment and storage tanks
- Sewage treatment basins
- Non-potable water storage facilities
- Steel handrails

9100 SYSTEM DTM
EPOXY MASTIC

This versatile epoxy coating quickly creates a tough, durable, protective surface. Just one coat of Rust-Oleum High Performance 9100 System DTM Epoxy Mastic is equal to multiple coats of competitive epoxy. Multiple activator options for unique applications.

- **Direct-to-metal (DTM) self priming formula—adheres to a variety of substrates**
- Superior long-term resistance to solvents, chemicals, abrasion and impact
- Convenient 1:1 mixing ratio — no measuring required
- Two-year rust-proof guarantee — maximum corrosion protection

STANDARD ACTIVATOR

- For air and surface temperatures of 10-38°C (50-100°F)

IMMERSION ACTIVATOR

- For fresh or salt water immersion of steel or concrete where water temperatures do not exceed 52°C (125°F)
- Great for use in floor coating applications
- Produces slightly lower gloss than standard activator
- Not for use in potable water tanks

LOW TEMPERATURE ACTIVATOR

- For air and surface temperatures of 5-15°C (40-60°F)

FAST-CURE ACTIVATOR

- Faster cure to minimize downtime
- Recoat in 4 hours at 21°C (70°F) and 50% RH
- For air and surface temperature of 10-38°C (50-100°F)
- Produces slightly lower gloss than standard activator

This is a two-component system. Order base and activator separately.

COLOURS (3.79 L)

	9171402	Dunes Tan
	9122402	Marlin Blue
	9165402	Regal Red
	9186402	Navy Grey
	9182402	Silver Grey
	9115402	Aluminum
	9179402	Black
	9192402	White

SAFETY COLOURS (3.79 L)

	9125402	Safety Blue
	9133402	Safety Green
	9144402	Safety Yellow
	204006	Safety Red
	204005	Safety Orange
	297081	Safety Orange (5 gallon)

TINT BASES (2.84 L)

	9105405	Red
	9106405	Yellow
	9107405	Masstone
	9108421	Deep
	9109408	Light

ACTIVATORS

205015	Standard (<250 g/l)
214430*	Immersion (<250 g/l)
9103402	Low Temp. (<250 g/l)
214432	Fast Cure (<250 g/l)
331254	Satin Activator (<250 g/l)
9101402	Standard (<340 g/l)
9102402*	Immersion (<340 g/l)
9104402*	Fast Cure (<340 g/l)

* Not for use with Tint Bases

APPLICATION


SUBSTRATE

VOC g/l

VOC <340

VOC <250

Covers: 11.62-20.9 m²
(125-225 ft²) per 3.78 L

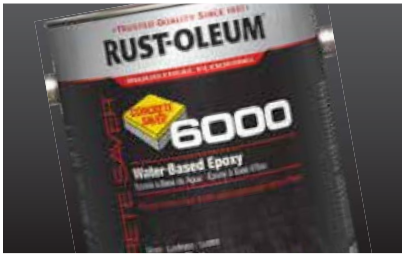

FOR USE ON:

- Floor coating for mild to moderate industrial environments
- Clean rooms, laboratories and schools
- Cafeterias and hospitals

6000 SYSTEM
WATER-BASED EPOXY

Low VOC, two-component water-based epoxy for industrial floors that features high gloss and is easy to clean.

- **Extended pot life for longer working time**
- Protects against heavy foot traffic and lightweight rubber-wheeled traffic
- Handles occasional mild chemicals, steam, hot water, humidity and moisture
- Cleans with soap and water

COLOURS

	6068408	Tile Red	ACTIVATOR
	6086408	Navy Grey	6001604
	6082408	Silver Grey	Activator
	6010408	Clear	

APPLICATION


SUBSTRATE

VOC g/l

VOC <250

Covers: 18.5-32.5 m²
(200-350 ft²) per 3.78 L

Prime with Rust-Oleum
5381405 Grey Primer

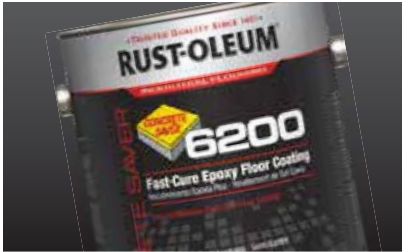

FOR USE ON:

- Warehousing and storage facilities
- Garages, showrooms and manufacturing

6200 SYSTEM
FAST-CURE EPOXY
FLOOR COATING

High performance, two-component easy maintenance flooring for mild to moderate environments.

- **Fast-curing formulation gets you back in service fast (4 hour recoat, 5 hour light traffic)**
- Excellent two-component chemical and abrasion protection — long-lasting protection against dusting, staining and wear
- Convenient ready-to-mix industrial flooring kit
- Ideal for interior and exterior concrete floors in industrial and commercial environments like warehouses, showrooms, manufacturing, garages and storage facilities

Base and activator included in two-component kit.

KITS

- 251763

Silver Grey
- 251765

Dunes Tan

APPLICATION


SUBSTRATE

STEEL CONCRETE

VOC g/l

VOC <250

Covers: 16.2-32.5 m²
(175-350 ft²) per 3.78 L

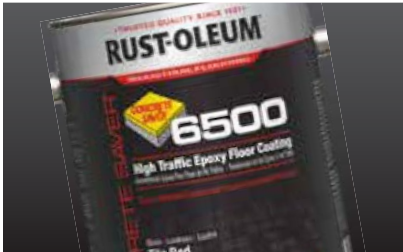

FOR USE ON:

- Warehousing and showrooms
- Laboratories and clean rooms
- Aircraft hangers and mechanical areas
- Storage facilities

6500 SYSTEM HIGH
TRAFFIC FLOOR COATING

100% solids, two-component high-build epoxy provides heavy-duty protection for industrial floors.

- **Protects against heavy foot and rubber wheel traffic, occasional chemical spills, splashes, power washes, abrasion and impact**
- Low odour ideal for use in confined, low ventilation areas
- Easy to maintain high gloss finish
- Dries quickly — return to service in 10 hr. for light traffic/ 72 hr. heavy traffic

Base and activator ordered separately.

COLOURS

- S6571413

Dunes Tan
- S6568413

Tile Red
- S6586413

Navy Grey
- S6582413

Silver Grey
- S6510413

Clear

PRIMERS

- S6511413

Penetrating Prime and Seal Primer Base
- 241099

TurboPrime™ Low VOC Primer Base

PRIMER ACTIVATORS

- S6502410

Penetrating Prime and Seal Primer Activator
- 241200

TurboPrime™ Low VOC Primer Activator

ACTIVATOR

- S6501410

Activator

APPLICATION

SUBSTRATE

CONCRETE

VOC g/l

VOC <100

COMPLIANT NATIONWIDE

Covers: 9.3 m²
(100 ft²) per 3.78 L



FOR USE ON:

- Warehousing and showrooms
- Laboratories and clean rooms
- Aircraft hangers and mechanical areas
- Storage facilities
- Topcoat in heavy-duty areas

6600 SYSTEM HEAVY
DUTY MAINTENANCE
FLOOR COATING

High performance, two-component heavy duty flooring for industrial and commercial environments.

- **Protects against heavy foot and rubber wheel traffic, occasional chemical spills, splashes, abrasion and impact**
- Excellent in conditions where traditional 100% solids epoxies fail due to outgassing of the concrete, rising temperatures, direct sunlight
- Low viscosity formula allows for easier application and more consistent finish
- Self-priming makes for quicker application time

Base and activator ordered separately.

COLOURS

- 282113

Dunes Tan
- 282112

Navy Grey
- 282111

Silver Grey
- 282109

Super Light Grey
- 282110

Light Grey
- 282107

Clear

ACTIVATOR

- 282115

Activator

APPLICATION

SUBSTRATE

CONCRETE

VOC g/l

VOC <100

COMPLIANT NATIONWIDE

Covers: 9.3 m²
(100 ft²) per 3.78 L



FOR USE ON:

- Warehousing and showrooms
- Laboratories and clean rooms
- Aircraft hangers and mechanical areas
- Storage facilities
- Topcoat in heavy-duty areas

6700 SYSTEM EXTENDED
POT LIFE EPOXY

Uses a unique chemistry, that results in a coating with great flexibility, working times and self-leveling properties. This two-component epoxy is applied in one easy step — no primer required. As a result of the low odour, this coating can be applied indoors with minimal disruption.

- **100% solids epoxy that anyone can apply**
- 60 minute pot life, 2x longer than standard 100% solids epoxies
- Great self-leveling properties allows for roller application or squeegee/back-roll application
- Low odour, low VOCs; great for new, old, bare or previously coated concrete floors
- Fast return to service- can accept vehicle traffic in 36-48 hours

Base and activator included in two-component kit.

TWO-COMPONENT KIT

- 301675

Silver Grey
- 301676

Dunes Tan
- 301677

Clear
- 301678

Navy Grey
- 301679

Super Light Grey
- 301680

Light Grey

BASE & ACTIVATOR SOLD SEPARATELY

- 332241

Silver Grey (2 gallons)
- 332245

Dunes Tan (2 gallons)
- 332242

Navy Grey (2 gallons)
- 332243

Super Light Grey (2 gallons)
- 332244

Light Grey (2 gallons)
- 333691

Color Part B (1 gallon)
- 332243

Clear (1.875 gallons)
- 333691

Clear Part B (1.125 gallons)

APPLICATION

SUBSTRATE

CONCRETE

VOC g/l

VOC <50

Covers: 9.3 m²
(100 ft²) per 3.78 L



- FOR USE ON:**
- Warehouses
 - Walkways
 - Over stained and painted concrete
 - Decks and patios

**5500 SYSTEM
ACRYLIC DUSTPROOFER
FLOOR SEALER**

- Roll and go concrete dustproofer/sealer.
- *Use direct to concrete or as a clear topcoat for an easier to clean and maintain surface*
 - Ideal for interior and exterior concrete floors, walkways, decks and patios in mild industrial and commercial environments
 - Convenient, ready-to-use with no measuring or mixing
 - Seals out water and mild chemicals — prevents dusting
 - Excellent coverage over new and previously coated surfaces
 - Fast-drying (recoat in one hour, traffic in 12 hours)

COLOURS

☐ 251282 Clear

APPLICATION

SUBSTRATE

CONCRETE WOOD

VOC g/l

VOC <100

COMPLIANT NATIONWIDE

Covers: 13.9-37.1 m²
(150-400 ft²) per 3.78 L



- FOR USE ON:**
- Wood or concrete floors
 - Office areas and warehousing
 - Gymnasiums
 - Glossy topcoat over anti-slip coatings

**6711 SYSTEM
CLEAR WATER-BASED
POLYURETHANE**

- Clear, water-based polyurethane for protection of wood floors.
- *Easy-to-use, single component clear gloss topcoat or sealer*
 - Protects against light traffic, weather and staining
 - For indoor and outdoor use
 - VOC compliant and low odour for use in most regulated areas

COLOURS

☐ 6711402 Clear

APPLICATION

SUBSTRATE

WOOD

VOC g/l

VOC <250

Covers: 37.1-74.3 m²
(400-800 ft²) per 3.78 L



- FOR USE ON:**
- Interior concrete floors in mild to moderate industrial and commercial environments
 - Warehouses, showrooms and garages
 - Manufacturing and storage facilities

**EASYCLEAR®
EPOXY MAINTENANCE
FLOOR COATING**

- High performance, two-component easy maintenance flooring for mild to moderate environments.
- *Convenient, ready-to-mix industrial flooring kit*
 - Excellent protection over new or old concrete or previously coated floors
 - Easy roller application
 - High gloss finish

Base and activator included in two-component kit.

KIT

☐ 256673 120 fl. oz.

APPLICATION

SUBSTRATE

CONCRETE

VOC g/l


VOC <50

COMPLIANT NATIONWIDE


Covers: 23.2-37.1 m²
(250-400 ft²) per 3.78 L

ANTI-SLIP

Preventing slips, trips and falls has never been easier than with Concrete Saver Anti-Slip Floor Coatings. From pedestrian foot traffic in locker rooms to heavy vehicle traffic in warehouses, Concrete Saver products are the easy answer for a safer facility. The coatings are easy to apply with in-house crews and result in a long-lasting durable finish that will protect your floors and the people that walk on them for years to come.

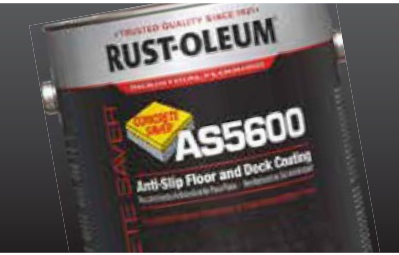

- FOR USE ON:**
- Interior and exterior concrete floors
 - Walkways
 - Decks and patios in mild industrial and commercial environments exposed to heavy pedestrian and light rubber wheeled cart traffic



COATING PROFILE

**AS5600 SYSTEM ANTI-SLIP
FLOOR AND DECK COATING**

- A fast-drying, tough anti-slip coating to brighten up your floors.
- *Ready-to-use with no messy measuring or mixing*
 - Acrylic formula provides a flexible, low to medium profile, excellent for concrete, asphalt, wood or metal
 - Low odour: can be applied during work hours
 - Fast-drying: can accept foot traffic in as little as 4 hours
 - Coefficient of Friction — Dry 1.30, Wet 0.90

COLOURS

☐ 261175 Safety Yellow

☐ 261176 Black

☐ 261177 Navy Grey

APPLICATION

SUBSTRATE


CONCRETE STEEL WOOD

VOC g/l

VOC <100

COMPLIANT NATIONWIDE

Covers: 5.5-6.5 m²
(60-70 ft²) per 3.78 L

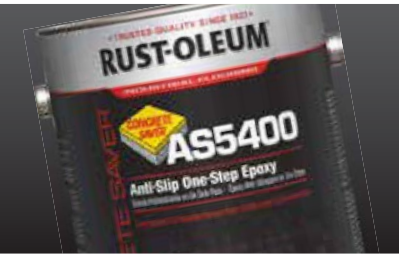

- FOR USE ON:**
- Aisles, decks and walkways
 - Stairs and machine operating areas
 - Entrances and exits



COATING PROFILE

**AS5400 SYSTEM ANTI-SLIP
ONE-STEP EPOXY**

- Labour-saving, anti-slip epoxy protects pedestrian grade floors in one step.
- *Easy-to-use, single component for fast application*
 - Ridged profile handles heavy foot traffic and/or light vehicle traffic
 - Can be resealed for multi-use areas subjected to mild chemicals, occasional steam and chemical cleaning
 - For indoor and outdoor use
 - Dries quickly — return to service in 24 hr. for heavy traffic
 - Coefficient of friction — Dry: 1.17, Wet: 1.00

COLOURS

☐ AS5471402 Dunes Tan

☐ AS5468402 Tile Red

☐ AS5486402 Navy Grey

☐ AS5482402 Silver Grey

☐ AS5479402 Black

SAFETY COLOURS

☐ AS5444402 Safety Yellow

*Some colours available in 5 gallons

APPLICATION

SUBSTRATE

STEEL† CONCRETE WOOD


VOC g/l

VOC <340

Covers: 4.6 m²
(50 ft²) per 3.78 L


† When primed with 9100 System — DTM Epoxy Mastic

ANTI-SLIP

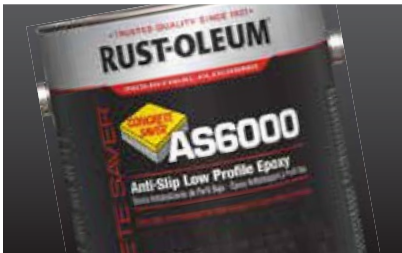

FOR USE ON:

- Barefoot recreational areas
- Locker rooms, hotel pools and restrooms
- Showers, laundries and walkways



COATING PROFILE

AS6000 SYSTEM ANTI-SLIP LOW PROFILE EPOXY

Low VOC, two-component water-based anti-slip floor epoxy acts as a safeguard on barefoot grade floors.

- **Use anywhere extra protection is needed from slips and falls in barefoot and wet recreational environments**
- For indoor and outdoor use
- Dries quickly — return to service in 24 hr. for light traffic/ 48 hr. heavy traffic
- Coefficient of friction — Dry: 0.78, Wet: 0.86

Available in two-component (1 gallon activated) kit of base and activator.

COLOURS

- AS6086425 Navy Grey
- AS6082425 Silver Grey

APPLICATION

SUBSTRATE


CONCRETE STEEL

VOC g/l

VOC <100


COMPLIANT NATIONWIDE

Covers: 7.4-9.2 m²
(80-100 ft²) per 3.78 L

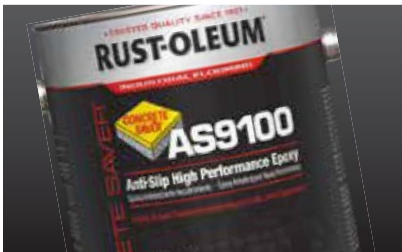

FOR USE ON:

- Floor coating for vehicle routes
- Forklift traffic and ramps
- Walkways and loading docks



COATING PROFILE

AS9100 SYSTEM ANTI-SLIP HIGH PERFORMANCE EPOXY

Low VOC, two-component extreme profile anti-slip epoxy offers maximum protection for vehicle grade floors.

- **Protects against chemicals and abrasion in heavy traffic environments**
- Highly ridged profile endures heavy wear, frequent power cleaning and constant high humidity
- For indoor and outdoor use
- Dries quickly — return to service in 12 hr. for light traffic/ 72 hr. heavy traffic
- Coefficient of friction — Dry: 1.05, Wet: 1.05

Available in two-component (1 gallon activated) kit of base and activator.

COLOURS

- AS9171425 Dunes Tan
- AS9168425 Tile Red
- AS9186425 Navy Grey
- AS9182425 Silver Grey

SAFETY COLOURS

- AS9144425 Safety Yellow

APPLICATION


SUBSTRATE

CONCRETE STEEL†

VOC g/l


VOC <250

Covers: 3.7-5.5 m²
(40-60 ft²) per 3.78 L
† When primed with 9100 System – DTM Epoxy Mastic

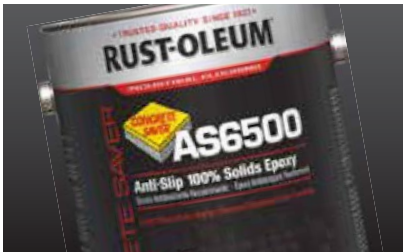

FOR USE ON:

- Floor coating for food processing
- Preparation areas and wash areas
- Where regular power cleaning and high humidity is common



COATING PROFILE

AS6500 SYSTEM ANTI-SLIP 100% SOLIDS EPOXY

Extra heavy-duty, two-component 100% solids epoxy maintains the anti-slip, chemical and abrasion resistance required in food processing where regular power cleaning and high humidity is common.

- **Protects against chemicals and abrasion in heavy traffic environments**
- Low odour ideal for use in confined, low ventilation areas
- For indoor and outdoor use
- Dries quickly — return to service in 12 hr. for light traffic/ 72 hr. heavy traffic
- Coefficient of friction — Dry: 1.1, Wet: 1.0

Available in two-component kit of base and activator.

COLOURS

- AS6586425 Navy Grey
- AS6582425 Silver Grey

APPLICATION

SUBSTRATE

CONCRETE STEEL†

VOC g/l


VOC <100

COMPLIANT NATIONWIDE

Covers: 2.3-3.2 m²
(25-35 ft²) per 3.78 L

† When primed with 9100 System – DTM Epoxy Mastic

FIBERGLASS REINFORCED PLASTIC

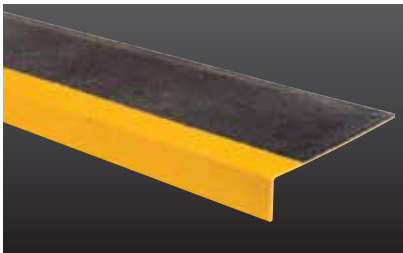

FOR USE ON:

- Interior/exterior concrete, metal or wood stairs


SAFESTEP® STEP COVERS

Heavy duty preformed anti-slip step covers provide a corrosion resistant surface for damaged, worn or slippery steps. (Glued and screw fixed).

AVAILABLE SIZES (width & depth):

- 271792 32" x 10" Black/Yellow Coarse Grit
- 271795 36" x 10" Black/Yellow Coarse Grit
- 271796 48" x 10" Black/Yellow Coarse Grit
- 271797 59" x 10" Black/Yellow Coarse Grit
- 271798 32" x 13.5" Black/Yellow Coarse Grit
- 271799 36" x 13.5" Black/Yellow Coarse Grit
- 271800 48" x 13.5" Black/Yellow Coarse Grit
- 271801 59" x 13.5" Black/Yellow Coarse Grit
- 292460 32" x 10" Black/Yellow Medium Grit
- 292461 36" x 10" Black/Yellow Medium Grit
- 292463 48" x 13.5" Black/Yellow Medium Grit

FIBERGLASS REINFORCED PLASTIC

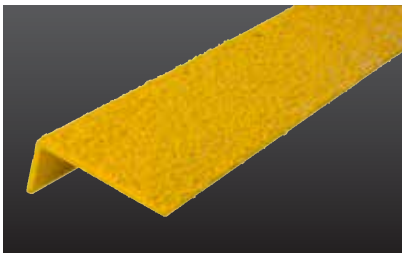

FOR USE ON:


- Interior/exterior concrete, metal or wood stairs

SAFESTEP® STEP EDGE

Heavy-duty, high visibility, slip-resistant step edges. (Glued and screw fixed).

AVAILABLE SIZES (width & depth):

271818	32" x 2.75" x 1.25"	Yellow	Coarse Grit
271819	36" x 2.75" x 1.25"	Yellow	Coarse Grit
271820	48" x 2.75" x 1.25"	Yellow	Coarse Grit
271821	59" x 2.75" x 1.25"	Yellow	Coarse Grit
292482	32" x 2.75" x 1.25"	Yellow	Medium Grit
292483	36" x 2.75" x 1.25"	Yellow	Medium Grit
292484	48" x 2.75" x 1.25"	Yellow	Medium Grit

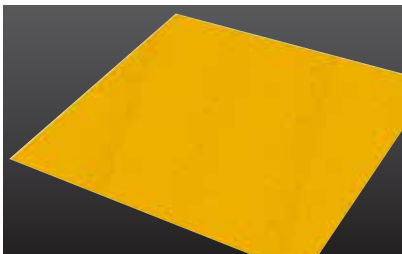

FOR USE ON:

- Interior/exterior concrete, metal or wood walkway, ramps and landings

SAFESTEP® SHEETING

Heavy-duty sheets with a tough anti-slip surface. Highly versatile and long-lasting fibreglass sheets for ramps, walkways, etc. (Glued and screw fixed).

AVAILABLE SIZES (width & depth):

271810	47" x 47"	Black	Coarse Grit
271811	47" x 47"	Safety Yellow	Coarse Grit
271814	47" x 96"	Safety Yellow	Coarse Grit
271815	47" x 96"	Gray	Coarse Grit
292178	47" x 96"	Black	Medium Grit

AVAILABLE SIZES (width & depth):

Landing Cover

271816	47.25" x 47.25"	Black/Yellow	Coarse Grit
--------	-----------------	--------------	-------------

Ladder Rung Cover

295380	12" x 1"	Safety Yellow	Medium Grit
--------	----------	---------------	-------------

FLOOR IN 24



FOR USE ON:

- Warehousing and showrooms
- Laboratories and clean rooms
- Aircraft hangers and mechanical areas
- Storage facilities

FASTKOTE® POLYUREA FLOOR COATING


Easy-to-apply, fast-curing, long-lasting floor coating. This high-gloss floor coating is designed for industrial and commercial settings with heavy foot traffic, rubber-wheeled vehicles and occasional chemical spills.

• Fast-curing protective floor coating

- Excellent chemical and abrasion resistance
- Easy roller application
- Fast dry times
 - Light traffic in 4-6 hours
 - Vehicle traffic in 24 hours

COLOURS

277498	Safety Yellow	277497	Super Light Grey
277495	Grey	280972	Clear
277496	Tan	285122	Black

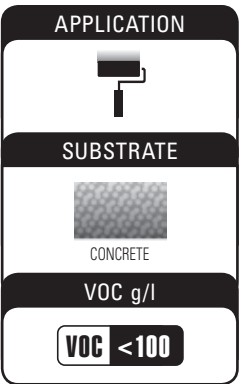

Covers: 37.1 m²
(400 ft²) per 3.78 L



FOR USE ON:

- Warehousing and showrooms
- Laboratories and clean rooms
- Aircraft hangers and mechanical areas
- Storage facilities

FASTKOTE® UV STABLE POLYUREA FLOOR COATING


Easy-to-apply, fast-curing, long-lasting floor coating. This high-gloss floor coating is designed for industrial and commercial settings with heavy foot traffic, rubber-wheeled vehicles where UV stability is important.

• Excellent chemical and abrasion resistance with UV stability

- Easy roller application
- Fast dry times
 - Light traffic in 4-6 hours
 - Vehicle traffic in 24 hours

COLOURS

278270	Safety Yellow	278494	Super Light Grey
278478	Grey	277499	Clear
278493	Tan	280971	Black

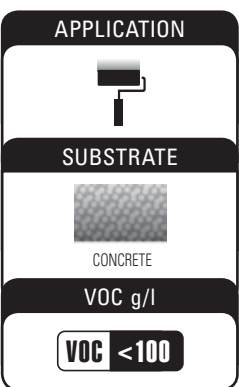

Covers: 37.1 m²
(400 ft²) per 3.78 L

FLOOR IN 24



FOR USE ON:

- Commerical application
- Restaurant
- Showrooms

MEDICI® DECORATIVE POLYUREA FLOOR COATING

High gloss, UV stable polyurea floor coating for use in industrial and commercial environments. Unique faux stain finishes are created using the Medici coating, tray and roller system. Medici combines two different finish colours in a simultaneous roller application to obtain a faux stain finish. The high solids content and excellent abrasion resistance makes it the perfect choice for a durable, decorative floor.

- **100% UV stable decorative finish**
- Fast dry coating accepts light traffic in 4-6 hours; full vehicle traffic in 24 hours
- Durable polyurea formula protects against chemicals and abrasion
- Easy roller application creates a consistent finish unlike other concrete stains

COLOURS

- | | |
|---|---|
|  280947 Terra Cotta |  280939 Brown Slate |
|  280938 Sierra Sunset |  280950 Stone |



APPLICATION

SUBSTRATE

CONCRETE

VOC g/l

VOC <100

Covers: 31.7 m²
(400 ft²) per 3.78 L



FOR USE ON:

- Warehousing and showrooms
- Laboratories and clean rooms
- Aircraft hangers and mechanical areas
- Storage facilities

FINISHKOTE 80 HIGH SOLIDS POLYASPARTIC FLOOR COATING

A UV stable, fast dry coating that provides excellent UV, chemical and abrasion resistance in a wide range of temperatures making it an excellent choice for both interior and exterior applications.

- **Can be applied by spray or roller at temperatures between -19-49°C (-20-120°F) and in high humidity**
- Fast dry coating can be top coated in 4-6 hours
- Provides excellent adhesion to concrete, epoxies, urethanes and polyureas
- Dries to a high gloss, professional finish

AVAILABLE PRODUCTS

- 283567** Part A - 2 Gallon
283616 Part B - 2 Gallon



APPLICATION

SUBSTRATE

CONCRETE

VOC g/l

VOC <100

Covers: 23.2-32.5 m²
(250-350 ft²) per 3.78 L

FLOOR IN 24



FOR USE ON:

- Warehousing and showrooms
- Laboratories and clean rooms
- Aircraft hangers and mechanical areas
- Storage facilities

FINISHKOTE 100 HIGH SOLIDS POLYASPARTIC FLOOR COATING

A 100% solids polyaspartic floor coating that provides excellent UV, chemical and abrasion resistance in a wide range of temperatures making it an excellent choice for both interior and exterior applications.

- **Squeegee/backroll application at temperatures between -19-49°C (-20-120°F) and in high humidity**
- Fast dry coating can be top coated in 4-6 hours
- Provides excellent adhesion to concrete, epoxies, urethanes and polyureas
- Dries to a high gloss, professional finish
- Can be applied clear or tinted with Polyurea Universal Tints

AVAILABLE PRODUCTS

- 283618** Part A - 2 Gallon
283643 Part B - 3 Gallon



APPLICATION

SUBSTRATE

CONCRETE

VOC g/l

VOC <100

Covers: 9.2-18.5 m²
(100-200 ft²) per 3.78 L



FOR USE ON:

- Warehousing and showrooms
- Laboratories and clean rooms
- Aircraft hangers and mechanical areas
- Storage facilities

BUILDKOTE POLYUREA FLOOR COATING PRIMER

Provides exceptional adhesion and withstands a wide range of temperatures and climate conditions. BuildKote has an extended open time making it a great choice for broadcast systems.

- **Can be applied by spray or roller at temperatures between -19-49°C (-20-120°F) and in high humidity**
- Fast dry coating can be top coated in 2-4 hours
- Provides excellent adhesion to concrete, fiberglass, wood, epoxy, urethanes and polyurethanes
- Can be applied clear or tinted with Polyurea Universal Tints
- Can also be applied to vertical surfaces as a primer or stand-alone coating

AVAILABLE PRODUCTS

- 283193** Part A - 1 Gallon
283191 Part B - 2 Gallon



APPLICATION

SUBSTRATE

CONCRETE

VOC g/l

VOC <100

Covers: 7.4-18.5 m²
(80-200 ft²) per 3.78 L

FLOOR IN 24



FOR USE ON:

- Commerical application
- Restaurant
- Showrooms

HEAVY METAL
DECORATIVE
FLOOR COATING

A high gloss, floor coating that uses pearlescent additives for a distinctive iridescent finish perfect for restaurants, showrooms, lobbies or any other space that needs a decorative and durable floor.

- *Easy-to-apply with long working time – 45 minute pot life*

- Fast dry coating accepts traffic in less than 24 hours
- Durable formula protects against chemicals and abrasion
- Use FastKote Polurea Black as a base coat for a more dramatic effect

AVAILABLE PRODUCTS

- 280952** Part A - 2 Gallon
280954 Part B - 1 Gallon

COLOURS

- 280927** Blue Sky
- 280928** Silver Bullet
- 280929** Copper Pot
- 280926** Earth Brown



APPLICATION

SUBSTRATE

CONCRETE

VOC g/l

VOC <100

Covers: 8.3-9.2 m²
(90-100 ft²) per 3.78 L

COMPANION PRODUCTS

200 ANTI-SKID FLOOR
COATING ADDITIVE

Specially refined aggregate provides increased skid resistance

- Formulated for use with our 6000 System Water-Based Epoxy or 6500 System 100% Solids Epoxy
- Can be added directly to the liquid coating or broadcast over the final finish

AVAILABLE PRODUCTS

- 200504** Anti-Skid Floor Coating Additive

ULTRAWEAR® ADDITIVE

Use with industrial floor coatings to achieve greater durability and an anti-slip surface

- Blend one bag per gallon

AVAILABLE PRODUCTS

- 213898** UltraWear Additive

DURABILITY ADDITIVE

Increase the durability, longevity and anti-slip properties of Rust-Oleum fast flooring products

- Easy and convenient — mix one bag into one gallon FastKote Polyurea Floor Coating or FastKote UV Polyurea Floor Coating
- Fine blend of aluminum oxide

AVAILABLE PRODUCTS

- 280945** Durability Additive

DECORATIVE VINYL CHIPS

Use with most systems for a decorative finish

- Available in 1 lb. bags

AVAILABLE PRODUCTS

- 205220** Black/White
205178 Blue/White
205177 Black/White/Blue
205179 Black/White/Grey



Visit Rustoleum.com/industrial for available colours.

RUST-OLEUM MIXERS
& ROLLERS

- 6695023** Jiffler Mixer
6697005 9" Phenolic "No Nap" Roller Cover

FLOOR COATINGS TECHNICAL DATA

The data contained in this chart is presented for the comparison of basic physical characteristics of Concrete Saver Floor Coatings. For more detailed information, see Rust-Oleum technical data sheets for individual products.	RECOMMENDED FILM THICKNESS				PERCENT VOLUME SOLIDS	COVERAGE				DRY TIME HRS. AT 21°C (70°F) – 27°C (80°F) & 50% HUMIDITY				THINNING AS NEEDED			CLEAN-UP	MIX RATIO / ACTIVATOR NO.	POT LIFE HRS. AT 21°C (70°F) – 27°C (80°F) & 50% HUMIDITY	DRY HEAT RESISTANCE (°C/°F)	VOC LEVEL (g/l) VOLATILE ORGANIC COMPOUND	FLASH POINT (°C/°F)	APPLICATION TEMPERATURE RANGE
	WET		DRY			PRACTICAL ASSUMES 15% MATERIAL LOSS		THEORETICAL AT 1 MIL DFT.		TACK-FREE	HANDLE	RECOAT	TRAFFIC	BRUSH / ROLLER	AIRLESS SPRAY	AIR-ATOMIZED SPRAY							
	MILS	MICRONS	MILS	MICRONS		ft²/gal.	m²/l	ft²/gal.	m²/l														
5600 System– Acrylic Urethane Floor Paint	5-8	125-200	1.5-2.0	37.5-50	25-30	170-400	4.2-6.6	400-480	9.8-11.8	1-2	—	4-6	24	—	—	—	Soap/Water	—	—	—	<100	>93°C (200°F)	10-32°C (50-90°F)
6000 System– Water-Based Epoxy	4-6.5	100-162.5	1.5-2.5	37.5-62.5	33-37	200-350	4.9-8.6	500-600	12.3-14.8	—	—	1-2	16-72	—	—	—	Soap/Water	7:1 6001604	6-8	—	<250	96°C (205°F)	15-38°C (60-100°F)
S60 Water-Based Epoxy Floor Coating	7-10	175-250	3.5-5	87.5-125	50	135-195	3.3-4.8	800	19.7	30 min.	—	1-2	24	Water	Water	Water	Soap/Water	2:1	2	—	0	>93°C (200°F)	10-32°C (50-90°F)
9100 System DTM Epoxy Mastic (with 9101402 Activator)	6.5-10.5	162.5-262.5	5-8	125-200	78-81	125-225	3.1-5.5	1250-1300	30.8-32.0	6-8	6-12	16-72	—	—	—	160402 10%	160402	1:1 70°F	2-41	149°C (300°F)	<340	43°C (110°F)	10-38°C (50-100°F)
6200 System – Fast-Cure Epoxy Floor Coating	3.5-8.0	87.5-200	2.5-5.5	62.5-137.5	69	300-350	7.4-8.6	—	—	—	—	4	5	—	—	—	160402	1:1	2-4	149°C (300°F)	<250	B:26°C A:-9°C	10-38°C (50-100°F)
6600 System– Heavy Duty Maintenance Floor Coating	16	400	16	400	100	100	2.5	1604	39.5	—	—	10-24	10-72	—	—	—	160402	2:1 1.6:1	½	—	<100	>100°C (212°F)	16-32°C (60-90°F)
6500 System– High Traffic Floor Coating	16	400	16	400	100	100	2.5	1604	39.5	—	—	10-24	10-72	—	—	—	160402	1.6:1	½	—	<100	>100°C (212°F)	16-32°C (60-90°F)
5500 System– Acrylic Dustproofer Floor Sealer	—	—	—	—	—	150-400	—	—	—	—	—	3	12	—	—	—	Soap/Water	—	—	—	<100	>93°C (200°F)	10-38°C (50-100°F)
6711 System– Clear Water-Based Polyurethane	2-3.5	50-87.5	.5-1.0	12.5-25	29	400-800	9.8-19.7	465	11.4	¼	—	½	24	—	—	Water up to 5%	190402 Soap/Water	—	—	—	<250	>93°C (200°F)	10-38°C (50-100°F)
EasyClear Epoxy Maintenance Floor Coating	3.0-7.0	75-175	2.0-5.0	50-125	76	400	9.8	1,221	30.0	—	—	10-24	10-96	—	—	—	160402	2:1	1.5	—	<100	B:0°C A:112°C	15.5-29°C (60-85°F)
AS5600 System– Floor and Deck Coating	20-23	500-575	12-15	300-375	62-64	60-70	1.5-1.7	—	—	—	—	—	24	—	—	—	Soap/Water	—	—	—	<50	>93°C (200°F)	10-38°C (50-100°F)
AS5400 System– 1-Step Epoxy Floor Coating	30-35	750-875	17-20	425-500	60-62	50	1:23	—	—	—	—	12	24	—	—	—	160402	—	—	—	<340	27°C (81°F)	10-38°C (50-100°F)
AS6000 System– Low Profile Epoxy Floor Coating	16-20	400-500	10-15	250-375	65-75	80-100	1.9-2.4	—	—	—	—	—	48	—	—	—	Soap/Water	3:7:1 AS60	1	—	<70	>93°C (200°F)	10-38°C (50-100°F)
AS9100 System– High Performance Epoxy Floor Coating	27-40	675-1000	17-25	425-625	62	40-60	1-1.5	—	—	—	—	—	72	—	—	—	160402	9.6:1 AS91	4	—	<250	27°C (81°F)	10-38°C (50-100°F)
AS6500 System– 100% Solids Epoxy Floor Coating	27-40	675-1000	26-40	650-1000	96-100	25-35	0.6-0.9	—	—	—	—	—	48	—	—	—	160402	4.1:1 AS65	1	—	<30	>93°C (200°F)	10-38°C (50-100°F)
FastKote®	4	100	3.4	100	100	400	37.16	—	—	1-2	3-6	2-12	24	—	—	—	Acetone	—	18	—	<10	—	10-32°C (50-90°F)
FastKote® UV	4	100	3.2	80	100	400	37.16	—	—	1-2	3-6	4-12	24	—	—	—	Acetone	—	18	—	0	—	10-32°C (50-90°F)
EcoPrime	2-3	50-75	2-3	50-75	100	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

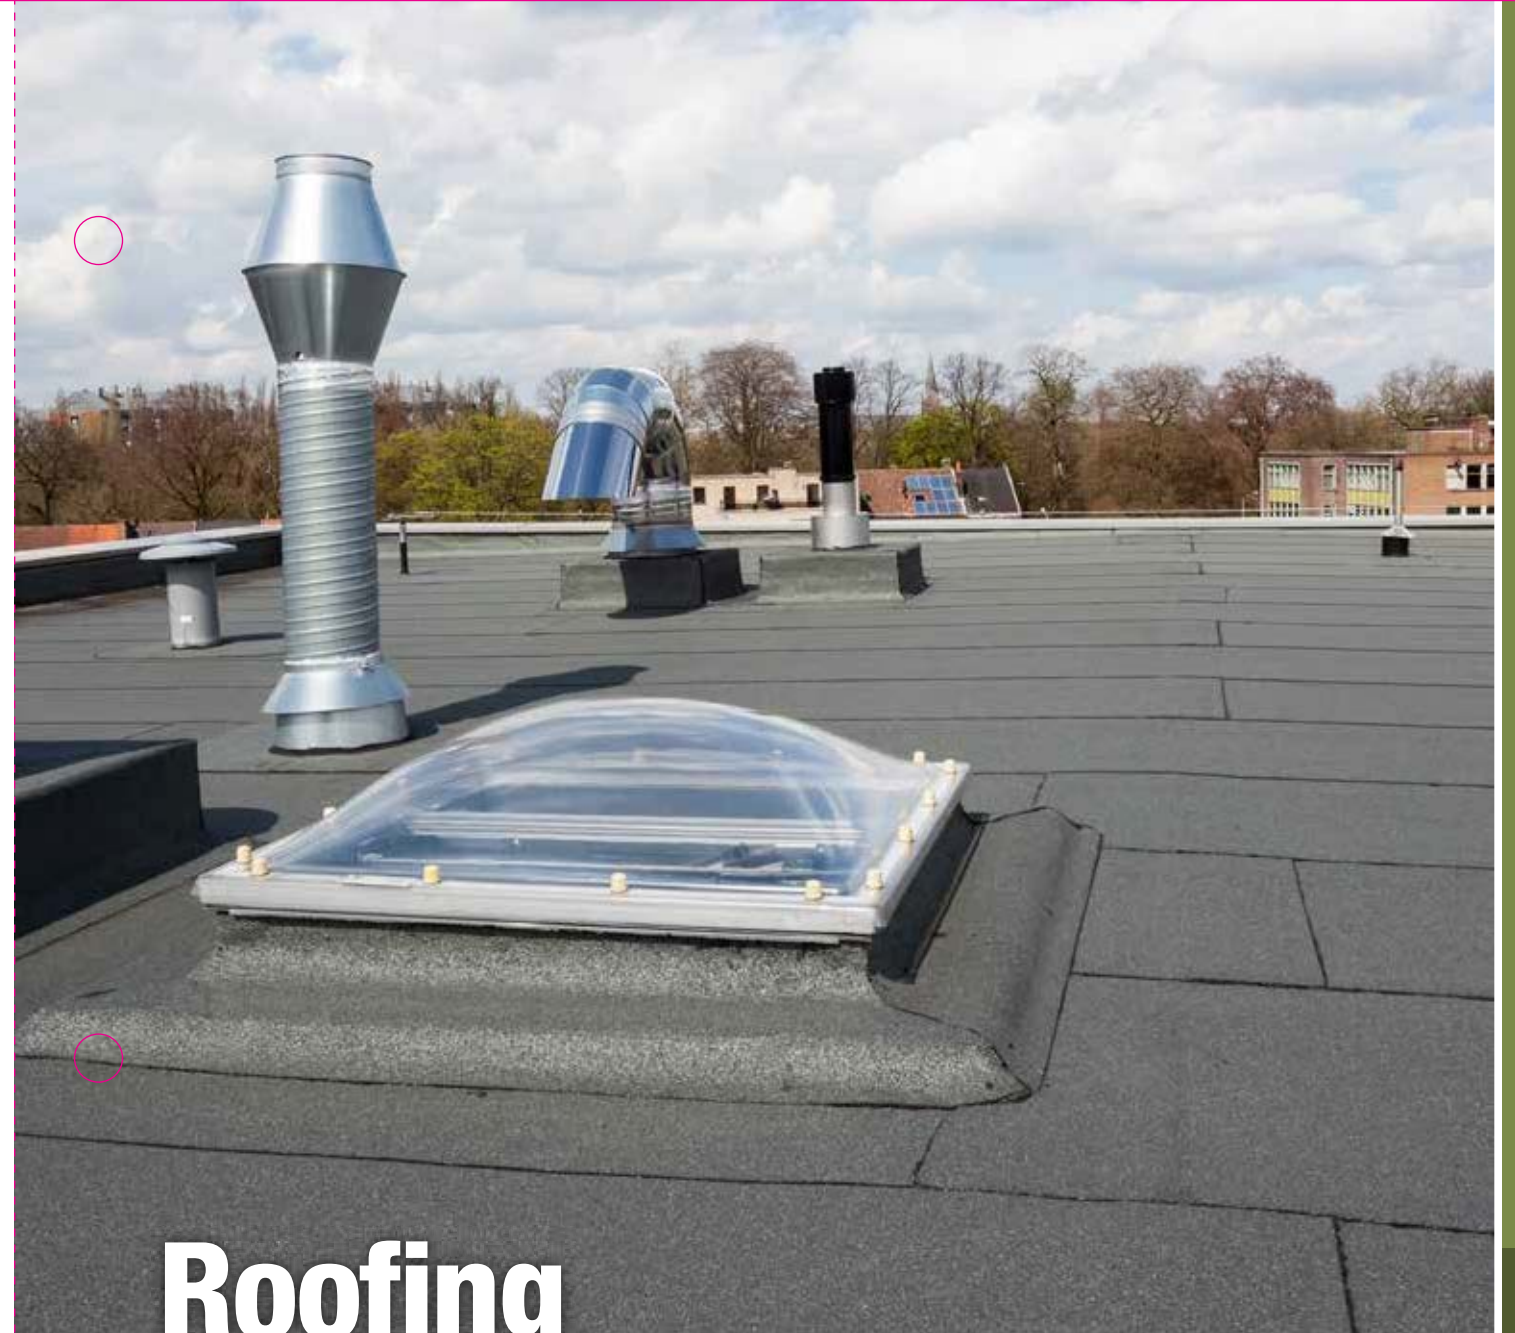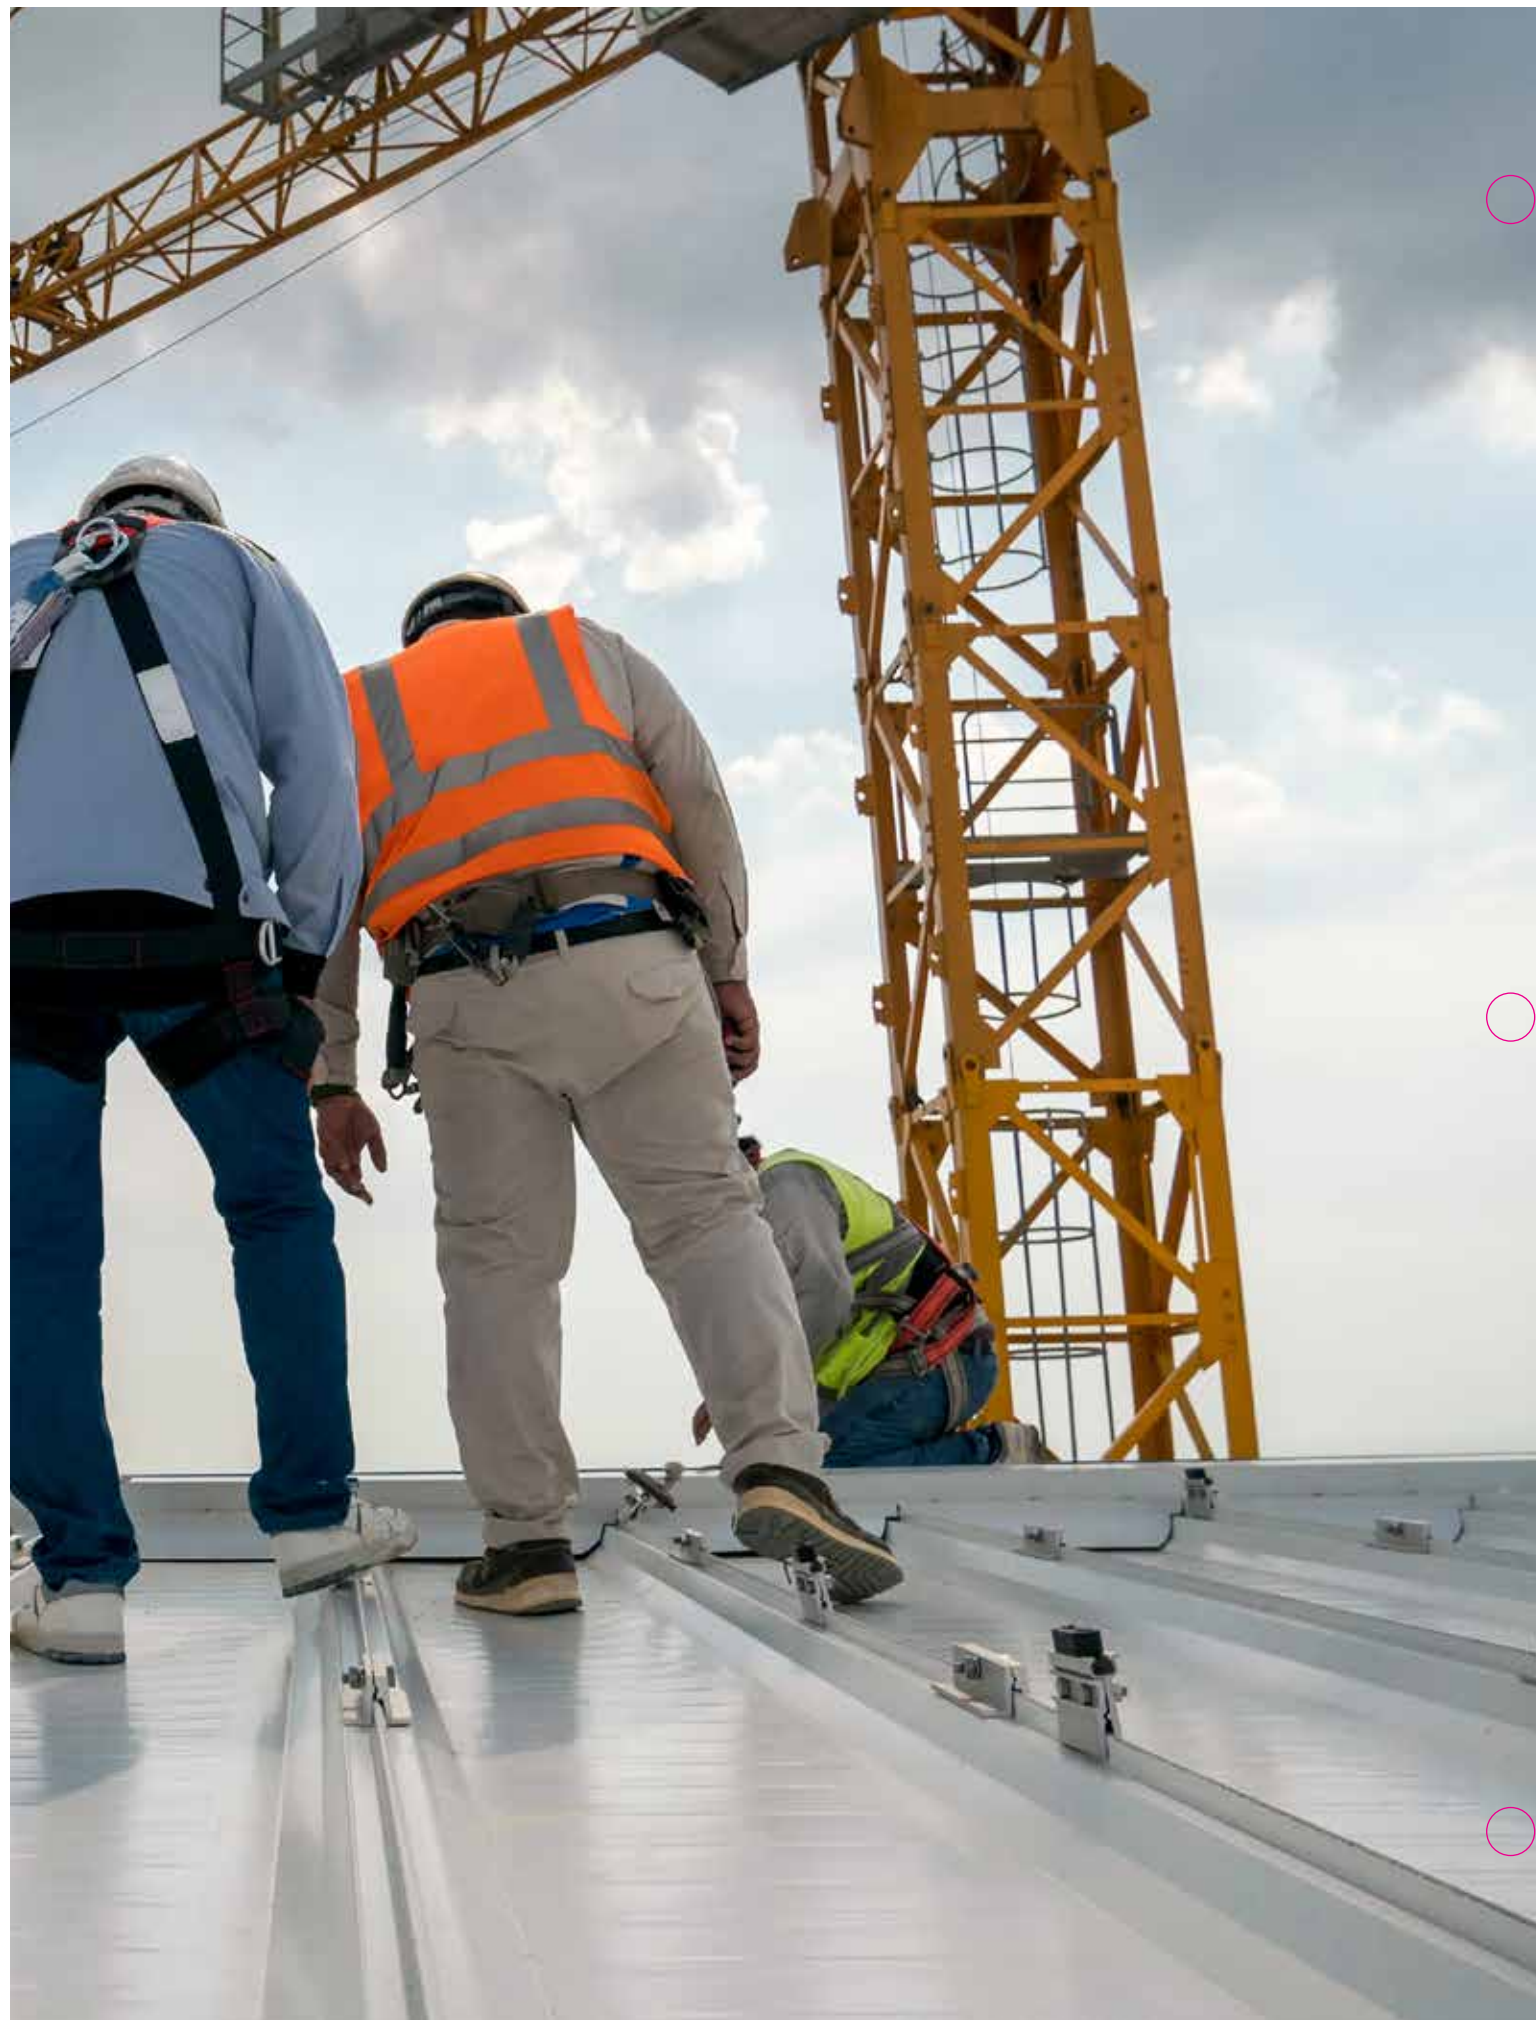

Roofing

Rust-Oleum LeakSeal has innovated quality products that repair and beautify commercial and residential spaces. Rust-Oleum LeakSeal is proud to introduce its new roofing program complete with Roof Coatings, Patch & Repair, and Cleaners for commercial and residential roofs.

Use on low and steep slope roofs, including commercial and residential properties, RVs, campers, porch awnings, barns, sheds & more.



PRIMER



- FOR USE ON:**
- Metal
 - Single-ply membranes
 - Concrete


LEAKSEAL® UNIVERSAL ROOF PRIMER

Rust-Oleum LeakSeal Universal Roof Primer is designed to be used on a variety of roofing substrates such as metal, single-ply membranes and concrete to promote adhesion of topcoats to the cleaned substrates.

- **All purpose primer**
- Easy to use aerosol
- Adhesion promoters
- Proprietary solvent blend
- No-dry time can be immediately coated

AVAILABLE PRODUCTS

321984 340 g



- FOR USE ON:**
- New and aged asphaltic or single ply membranes


LEAKSEAL® WATER-BASED PRIMER

Rust-Oleum LeakSeal Water-Based Primer is a polymer modified primer that conditions a variety of roofing substrates prior to application of Rust-Oleum LeakSeal Elastomeric Roof Coating systems.

- **Multi-surface primer**
- Quick drying
- Environmentally safe
- Low VOC
- Promotes adhesion for coating systems to new and aged asphaltic or single ply membranes

AVAILABLE PRODUCTS

322037 18.9 L
322051 3.78 L



- FOR USE ON:**
- Cold, hot, wet, dry, or underwater surfaces
 - New asphalt ply and mod-bit membranes, vents, shingles, skylights and chimneys

LEAKSEAL® ULTIMATE WET PATCH

Rust-Oleum LeakSeal Rubberized Wet Patch is a premium quality, heavily fibered, asphalt-based, roof cement blended with penetrating oils and plasticizing agents that can be applied directly to cold, hot, wet, dry or underwater surfaces. Rubberized Wet Patch can be used to repair and restore flashings and roofing defects such as blisters, cracks, and punctures. It can also be used to adhere new asphalt ply, and modified bitumen membrane flashings or seal vents, shingles, skylights, and chimneys. Rubberized Wet Patch resists sags and spreads very easily in cold conditions.

- **Superior adhesion**
- All-weather repairs
- Heavily fibrated and flexible to resist cracking
- Sag resistant

AVAILABLE PRODUCTS

322022 11.4 L
322050 3.78 L
322032 300 mL



- FOR USE ON:**
- Flat or slope roofs

LEAKSEAL® CLEAR ROOF PATCH

Rust-Oleum LeakSeal Clear Roof Patch provides a quick, durable waterproofing seal that is easy to apply. It can be used as a stand alone sealant or in conjunction with coating systems.

- **One-part thermoplastic elastomer**
- High performance
- Flexible seal
- Fast skinning fast cure through

AVAILABLE PRODUCTS

322045 3.78 L
322028 946 mL
322031 300 mL



REPAIR

REPAIR



FOR USE ON:

- Roofs
- Skylights
- Flashings
- Chimneys


LEAKSEAL® ROOF REPAIR WET/DRY

Rust-Oleum LeakSeal Plastic Roof Cement is a fibered, asphalt based cement used to install, repair, or rebuild roof flashings at parapet walls, gravel stops, stacks, vents, monitors and similar applications. It is perfect for use with fiberglass or polyester fabric or roll roofing. Applies fast & smooth without stringing.

- **Applies smooth without stringing**
- Fibered, asphalt based
- Seals crack and splits in dry conditions
- Waterproofs and stops leaks

AVAILABLE PRODUCTS

322034 3.78 L
322033 800 mL



FOR USE ON:

- General repairs on asphalt and modified bitumen roofs


LEAKSEAL® ROOF REPAIR ALL SEASON

Rust-Oleum LeakSeal Roof Repair All Season is a fibrated, asphalt based mastic formulated with a blend of SBS rubber modifier, penetrating oils, and plasticizing agents.

- **Stops leaks**
- All season application
- SBS Modified
- Adheres to damp surfaces
- Low temperature workability

AVAILABLE PRODUCTS

322133 18.9 L
322132 3.78 L
322130 300 mL



FOR USE ON:

- Metal
- Wood
- Vinyl
- Glass

LEAKSEAL® GUTTER & SIDING SEALANT

LeakSeal Gutter & Siding Sealant is an all season application. Adheres to metal, wood, vinyl and glass.

- **Low temperature workability**
- Versatile
- Stops leaks

AVAILABLE PRODUCTS

338373 300 mL - White
338375 300 mL - Clear



FOR USE ON:

- Flashings
- Seams
- Cracks
- Small holes
- Blisters
- Eavestroughs

LEAKSEAL® ROOF PATCH FABRIC MESH

LeakSeal Roof Patch Fabric Mesh is a fibreglass fabric used to reinforce roof repair jobs such as flashings, seams, cracks, small holes, blisters and eavestroughs.

- **Use with LeakSeal Roof Patch to repair cracks, seams, small holes, flashings, blisters and gutters**

AVAILABLE PRODUCTS

259957 25 ft. roll



REPAIR

COATING



FOR USE ON:

- Metal roofs
- Sidewalls
- Modified bitumen


**LEAKSEAL® ALUMINUM
ROOF COATING - 15 YEAR**

Rust-Oleum LeakSeal 15 Year Aluminum Roof Coating is a metallic pigmented coating used for rustproofing and weatherproofing metal roofs and sidewalls and as a reflective coating for built-up roofing and modified bitumen systems.

- **66% Reflectivity**
- Energy efficient reflective coating
- 15.9% Metallic Flake Content
- 1 Coat direct to tight rust — no primer needed
- Prevents rust and waterproofs metal roofs

AVAILABLE PRODUCTS

322077 18.9 L
322066 3.78 L



FOR USE ON:

- Metal roofs
- Sidewalls


**LEAKSEAL® ALUMINUM
ROOF COATING - 7 YEAR**

Rust-Oleum LeakSeal 7 Year Aluminum Roof Coating is a metallic pigmented coating used for rustproofing and weatherproofing metal roofs and sidewalls, and as a reflective coating for built-up roofing and modified bitumen roof systems.

- **50% Reflectivity**
- Energy efficient reflective coating
- 9.7% Metallic flake content
- 2 Coat direct to tight rust — no primer needed
- Prevents rust and waterproofs metal roofs

AVAILABLE PRODUCTS

322079 18.9 L
322068 3.78 L



FOR USE ON:

- Metal roofs
- Concrete
- Modified bitumen
- Built-up
- Weathered single ply roofing

**LEAKSEAL® ELASTOMERIC
ROOF COATING - 17 YEAR**

Rust-Oleum LeakSeal 17 Year Elastomeric Roof Coating provides a high initial reflectivity value of 85%, energy efficient, long term durability and excellent resistance to weathering and dirt pick-up.

- **85% Reflectivity**
- Energy efficient reflective coating
- Rain resistant in 2 hours
- Low temperature flexibility to -34°C (-30°F)

AVAILABLE PRODUCTS

322080 18.9 L
322069 3.78 L



FOR USE ON:

- Metal roofs
- Concrete
- Modified bitumen
- Asphalt build up
- Weathered single ply roofing


**LEAKSEAL® ELASTOMERIC
ROOF COAT - 7 YEAR**

Rust-Oleum LeakSeal 7 Year Elastomeric Roof Coating provides a high initial reflectivity value of 67%, energy efficient, long term durability and excellent resistance to weathering and dirt pick-up. This elastomeric roof coating is formulated to meet and/or exceed the standards as established in ASTM D6083. Rust-Oleum LeakSeal 7 Year Elastomeric Roof Coating waterproofs and weatherproofs metal, weathered single ply membranes as well as smooth surface asphalt built-up and modified bitumen roofing substrates.

- **67% Reflectivity**
- Energy efficient reflective coating
- Rain Resistant in 6 hours
- Mildew resistant

AVAILABLE PRODUCTS

322082 18.9 L
322071 3.78 L



FOR USE ON:

- Asphalt build up
- Modified bitumen


**LEAKSEAL® FIBERED
ROOF COATING**

Rust-Oleum LeakSeal Fibered Black Roof Coating is a high quality cold-process asphalt based roof coating formulated to resist the detrimental effects of the environment.

- **Water proofer**
- Solvent-based
- Extremely flexible, resists splitting and cracking
- Fibered for enhanced durability
- Fast, easy economical installation

AVAILABLE PRODUCTS

322084 18.9 L
322073 3.78 L



FOR USE ON:

- Asphalt build up
- Modified bitumen
- Damp or green concrete


**LEAKSEAL® ROOF AND
FOUNDATION COATING**

Rust-Oleum LeakSeal Roof and Foundation Coating is a non-fibered asphalt emulsion that can be either spray or roller applied as a high quality primer and thin base coat for use after curing with Rust-Oleum LeakSeal roof coatings, or as a damp proof on vertical surfaces to protect against moisture penetration in roofing or building applications. This product is used to fill pores and protect against moisture penetration when sprayed or rolled-on.

- **Damp proofer**
- Asphalt emulsion
- Protects and seals roofs and foundation walls
- Spray grade, non-fibered
- Rain resistant in 2 hours

AVAILABLE PRODUCTS

322085 18.9 L
322074 3.78 L



WATERPROOFING



- FOR USE ON:**
- Exterior wall cavities
 - Poured concrete
 - Steel
 - Wood base substrates

LEAKSEAL® FOUNDATION MEMBRANE

Rust-Oleum LeakSeal 36 inch Foundation Membrane is an impermeable, self-adhered sheet designed to be applied to exterior cavity walls to mitigate air infiltration/exfiltration, vapour transmission and water penetration.

- *Manufactured to a preset, uniform thickness that provides consistent and uniform coverage*
- Rugged HDPE film protects SBS membrane against incidental damage during construction process
- White facer reduces heat adsorption
- Recommended LeakSeal Water-based Primer for superior adhesion

AVAILABLE PRODUCTS

322024 36"



- FOR USE ON:**
- Wood
 - Metal
 - Concrete
 - Masonry
 - Asphalt surfaces

LEAKSEAL® WATERPROOFING SEALANT

LeakSeal Waterproofing Sealant works with waterproofing membrane. Use on wood, metal, concrete, masonry and asphalt surfaces.

- *Stays flexible*
- Seals all joints and holes
- Bonds to wet surfaces
- Waterproofs and stops leaks

AVAILABLE PRODUCTS

338378 800 mL

338377 300 mL

WATERPROOFING



- FOR USE ON:**
- Exterior wall cavities
 - Poured concrete
 - Steel
 - Wood base substrates

LEAKSEAL® FOUNDATION MEMBRANE

Rust-Oleum LeakSeal 9 inch Foundation Membrane is an impermeable, self-adhered sheet designed to be applied to exterior cavity walls to mitigate air infiltration/exfiltration, vapour transmission and water penetration.

- *Manufactured to a preset, uniform thickness that provides consistent and uniform coverage*
- Rugged HDPE film protects SBS membrane against incidental damage during construction process
- Superior adhesion
- All-weather repairs
- Heavily fibrated and flexible to resist cracking
- Sag resistant
- White facer reduces heat adsorption
- Seals window and door frames

AVAILABLE PRODUCTS

322026 6"

322027 9"



- FOR USE ON:**
- Exterior wall cavities
 - Poured concrete
 - Steel
 - Wood base substrates

LEAKSEAL® WATERPROOFING LIQUID MEMBRANE


Rust-Oleum LeakSeal Waterproofing Liquid Membrane is designed to seal exterior above and below grade wall assemblies and mitigate air infiltration/exfiltration, vapour transmission and water penetration.

- *Seamless, monolithic membrane*
- Roller or spray applied
- Highly elastic formula remains flexible to expand with building movement and resists cracking
- Withstands wide temperature swings
- UV resistant

AVAILABLE PRODUCTS

322038 18.9 L

322052 3.78 L

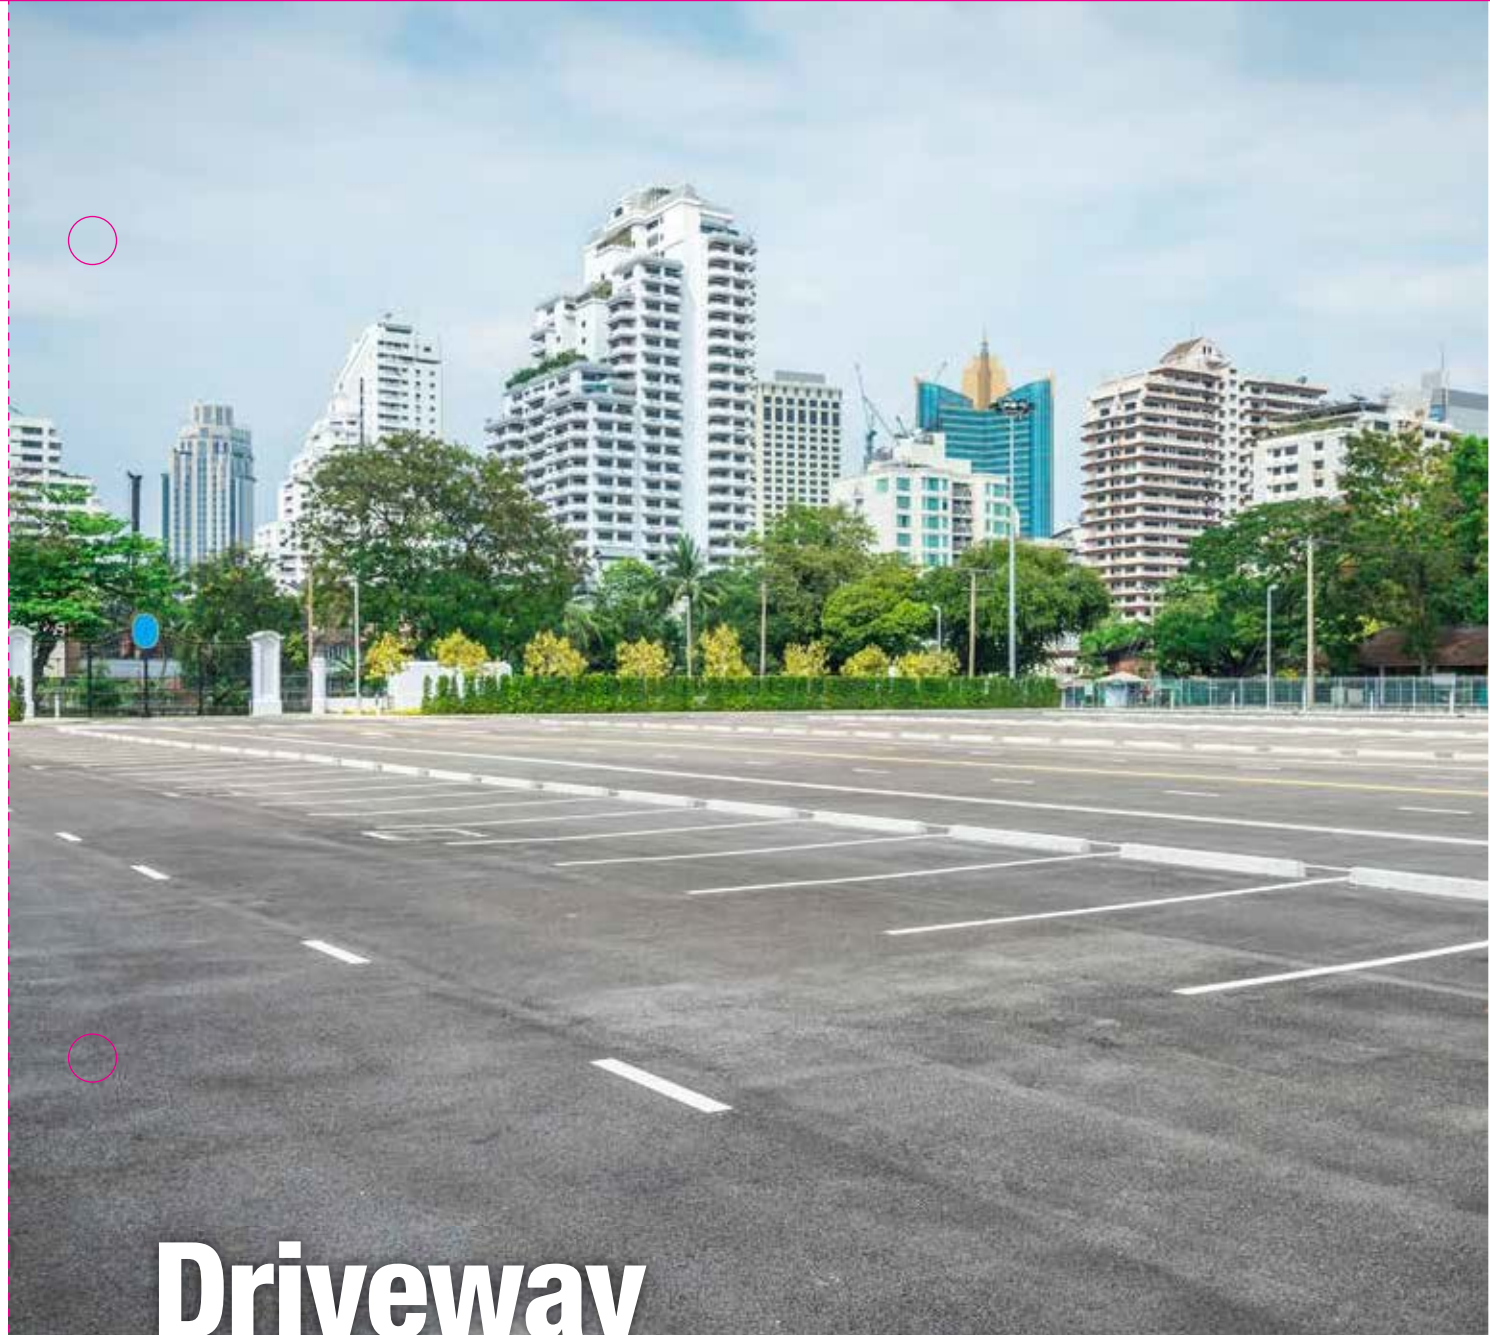

Driveway

For high-performance coatings that excel on the most demanding surfaces — with one coat coverage and outstanding durability — look to Rust-Oleum®, the #1 trusted brand for protection.



EPOXYSHIELD®



FOR USE ON:
• Asphalt surfaces

**EPOXYSHIELD®
ULTIMATE DRIVEWAY
CRACK FILLER**

EPOXYSHIELD Ultimate Driveway Crack Filler is formulated with rubber to produce a flexible, durable, long-lasting seal over cracks in asphalt surfaces.

- **Rubberized**
- Ready to seal within 2 hours
- Non-tracking formula
- Easily fills small cracks
- Urethane fortified

AVAILABLE PRODUCTS
317751 White - 300 mL

APPLICATION

SUBSTRATE

ASPHALT



FOR USE ON:
• Asphalt surfaces

**EPOXYSHIELD®
PREMIUM CRACK FILLER**

EPOXYSHIELD Premium Rubberized Crack Filler is formulated with urethane-fortified polymers to produce a flexible, durable, long-lasting seal over cracks in asphalt surfaces.

- **For cracks less than 12 mm (1/2")**
- Easily fills small cracks
- Urethane fortified for better flexibility
- Pourable, rubberized

AVAILABLE PRODUCTS
257557 Black - 3.78 L

APPLICATION

SUBSTRATE

ASPHALT

EPOXYSHIELD®



FOR USE ON:
• Asphalt surfaces

**EPOXYSHIELD® ASPHALT
POTHOLE FILLER**

EPOXYSHIELD Asphalt Pothole Filler is a pre-mixed, ready-to-use “cold patch” asphalt repair product that permanently patches potholes and large cracks. This advanced-technology formula remains workable to temperatures as low as 5°C (41°F) and provides superior adhesion to the asphalt base. The low odour formula makes it easier to work with.


- **Fills in cracks and holes greater than 12 mm (1/2")**
- Permanently fills large cracks and potholes
- Drive-ready immediately
- Use under all weather conditions

AVAILABLE PRODUCTS
257892 Black - 4.5 kg
280607 Black - 10 kg

APPLICATION

SUBSTRATE

ASPHALT

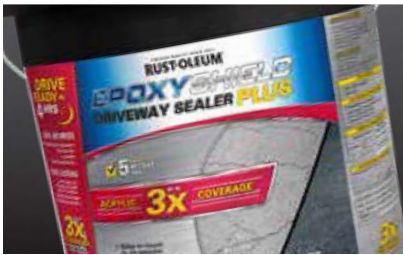

FOR USE ON:
• Asphalt surfaces

**EPOXYSHIELD® DRIVEWAY
SEALER PLUS 3X**

EPOXYSHIELD Driveway Sealer Plus provides exceptional coverage. One-coat application gets your driveway back in 4 hours.

- **Rain ready in 1 hour**
- Low VOC
- Up to 3 times better coverage than standard asphalt or coal tar
- One coat application, easy-stir formula and low odour

AVAILABLE PRODUCTS
270902 Black - 17 L

APPLICATION

SUBSTRATE

ASPHALT



Janitorial/Sanitation

Rust-Oleum manufactures a diverse arsenal of cost-effective and high-performance products for all cleaning needs. The Rust-Oleum product range includes Cleaners and Degreasers, Mould Remediation, Disinfectants, Rust Removers, Drain, Septic and more. Whatever the cleaning challenge, Rust-Oleum has the right solution for your janitorial and sanitation needs.



MOULD REMEDIATION



FOR USE ON:

- Hard and fabric surfaces such as drywall, wood, composite wood, plastic, concrete, siding, shingles, metal, brick, stone, tile, grout, stucco, fabric (sports bags, clothing), furniture, upholstery, flooring, rubber (front load washing machine gasket) and many more

CONCROBIUM MOLD CONTROL®

Concrobium Mold Control is a patented solution that effectively kills and prevents mould and mildew, and eliminates musty odours with no bleach or harmful chemicals. The product works as it dries by crushing mould spores at the roots and leaves behind an invisible antimicrobial shield that prevents future mould growth. Use Concrobium Mold Control for mould and mildew clean-up and prevention, general interior maintenance, water damage restoration and during construction/renovation (paint prep and pre-treatment of building materials).

• *Kills and prevents mould and mildew*

- Contains no bleach, ammonia or volatile organic compounds (VOCs)
- Health Canada Registered (DIN 02269996)
- CFIA Approved
- Xactimate Code: HMR-GRMBIO
- Coverage rate varies according to surface and application method

AVAILABLE PRODUCTS

- 620020 18.9 L
- 620004 3.78 L
- 620946 946 mL



FOR USE ON:

- Most hard, non-porous or semiporous surfaces such as wood and composite wood, concrete, masonry, drywall, grout, fibreglass, tile, plastic, laminate and metal

CONCROBIUM® MOLD STAIN REMOVER – 2 PART

Concrobium Mold Stain Remover is an innovative mould stain cleaning system designed to help restoration professionals complete jobs more effectively and profitably. The unique solution quickly and easily removes the toughest mould stains on a range of surfaces, and is the ideal choice for professional mould remediators.

• *Ready-to-use immediately once parts 1 and 2 are combined*

- Employs peracetic acid (PAA), a highly effective oxidizing agent for mould and bacterial stains
- Requires no scrubbing and no clean-up; just wet the surface and allow to dry; Cleans most surfaces in a single application
- Can be used in homes, hospitals, schools, commercial and industrial buildings — anywhere mould stain removal is required
- Xactimate Code: HMR-GRMS

AVAILABLE PRODUCTS

- 629489 3.78 L/500 mL

MOULD REMEDIATION



FOR USE ON:

- Most hard, non-porous or semiporous surfaces such as wood and composite wood, concrete, masonry, drywall, grout, fibreglass, tile, plastic, laminate and metal

CONCROBIUM® MOLD STAIN REMOVER

Concrobium Mold Stain Remover is an innovative mould stain cleaning system designed to help restoration professionals complete jobs more effectively and profitably. The unique solution quickly and easily removes the toughest mould stains on a range of surfaces, and is the ideal choice for professional mould remediators.

• *Ready-to-use*

- Employs peracetic acid (PAA), a highly effective oxidizing agent for mould and bacterial stains
- Requires no scrubbing and no clean-up; just wet the surface and allow to dry; Cleans most surfaces in a single application
- Can be used in homes, hospitals, schools, commercial and industrial buildings — anywhere mould stain removal is required
- Xactimate Code: HMR-GRMS

AVAILABLE PRODUCTS

- 6292338 1 L



FOR USE ON:

- Large spaces and hard-to-reach areas such as basements, cellars, attics, crawlspaces and wall cavities

FOGGER

A cold (ULV) fogger is an effective application method for Concrobium Mold Control® to eliminate mould, mildew and musty odours in large or inaccessible spaces. The fogger evenly mists and saturates the air in an enclosed environment, coating all surfaces. Fogging can be an ideal approach to mould remediation in damp, musty basements, attics, crawlspaces and any large area where mould is a concern.

• *Easy to use tool that atomizes Concrobium Mold Control solution into a fine mist for even surface application*

- Use to pre-treat building materials during construction or renovation
- 3.78 L fluid tank; 30 foot reach

AVAILABLE PRODUCTS

- 200620810



FOR USE WITH:

- Fogger

FOGGER INTAKE FILTER


Keep intake filter in place during use to help prevent dust and fog droplets from entering the unit.

• *Washable and re-usable; rinse thoroughly with water and allow to dry*

AVAILABLE PRODUCTS

- 200081CC

MOULD REMEDIATION

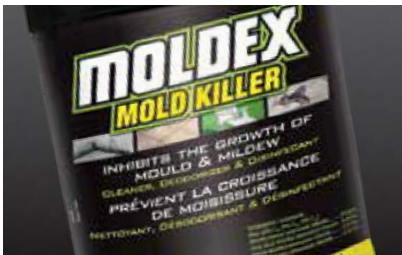

FOR USE ON:

- Walls, floors and other hard, (inanimate) non-porous surfaces such as tables, chairs, countertops, sinks, tile, porcelain, and bedframes

MOLDEX® MOLD KILLER

Moldex Mold Killer is a one-step disinfectant cleaner that is effective against a broad spectrum of bacteria. It is fungicidal and will prevent the growth of mould and mildew and their odours when used as directed. It quickly removes dirt, grime, mould, mildew, food residue, and other organic matter commonly found in homes, basements, attics, walls, kitchens and bathrooms. It destroys and neutralizes mould, mildew and their odours at their source. It is not a masking agent or general purpose stain remover. It is a bleach-free, phosphate free, non-abrasive disinfectant mould killer that can be used on most washable surfaces.

- **Inhibits the growth of mould & mildew; cleans, disinfects and deodourizes**
- Bleach-free formula contains no phosphates and leaves a clean fresh scent
- Hospital grade disinfectant; non-scratch formula
- Health Canada Registered (DIN 02437198)

AVAILABLE PRODUCTS

- 350634** 18.9 L (MTO)
- 5522** 3.78 L
- 5012** 946 mL



FOR USE ON:

- Glazed ceramic tile, grout, tubs, fibreglass, shower doors, vinyl shower curtains, sinks, toilets, walls, doors, counters, glass, plastic, no-wax floors, windowsills, vinyl siding, wood, concrete, rubber, around the pool, and more

MOLDEX® INSTANT MOLD & MILDEW STAIN REMOVER

Moldex Instant Mold & Mildew Stain Remover is an aggressive cleaner that erases stains before your eyes. It delivers industrial strength cleaning action without scrubbing. Formulated with new Advanced Bleach Gel which is designed to penetrate deep and eliminate mould and mildew stains. Our Active Cling™ Technology allows powerful cleaning agents to remain (or hold) onto vertical surfaces longer to achieve the highest effective contact time. Just spray on and watch stains completely disappear.

- **3X More powerful to remove mould and mildew stains instantly**
- No scrubbing — Instant results
- Contains Advanced Bleach Gel — Indoor & Outdoor Formula

AVAILABLE PRODUCTS

- 350632** 18.9 L (MTO)
- 350629** 3.78 L
- 7110** 946 mL

MOULD REMEDIATION



FOR USE ON:

- Patio furniture, awnings, shower curtains, walls, tile, grout, plastic, previously painted surfaces, basements, window frames, sealed wood, drywall, siding, shingles, tarps, tents, canvas, boat & R.V. tops, fabric, vinyl, brick and ceramic


MOLDEX® MOLD & MILDEW NON-BLEACH STAIN REMOVER

Moldex Non-Bleach Mold & Mildew Stain Remover is a multi-surface cleaner that removes deeply seated mould and mildew stains. This product is perfect for mould remediation, flood disaster, housekeeping and property maintenance applications. It leaves behind a residual stain fighting technology on the surface that lasts for months. It is a safe, powerful, bleach-free alternative, perfect for almost any surface.

- **Safe, powerful, bleach-free alternative; fast acting and light scrubbing**
- Indoor/outdoor; no ammonia and non-toxic
- No odour & non-corrosive; will not harm children, pets or plants; colour safe for fabrics and carpets

AVAILABLE PRODUCTS

- 5312** 946 mL

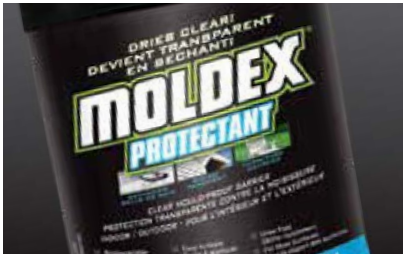

FOR USE ON:

- Awnings, shower curtains, walls, tile, grout, plastic, previously painted surfaces, basements, window frames, sealed wood, tarps, tents, shingles, roofs, siding, asphalt, concrete, foundations, brick, masonry, walkways and retaining walls

MOLDEX® PROTECTANT

Moldex Protectant is a simple to use, spray applied invisible film that protects against the harmful effects of moisture damage. Apply this mould treatment immediately after cleaning to establish a barrier between the surface and the bacteria, mould and mildew. When applied properly, this water-based product provides long-lasting resistance to stains and discolouration. Perfect for both indoor and outdoor applications. It is an easy to apply mould stain prevention solution that dries clear and fast.

- **Non-toxic, biodegradable water-based formula creates a barrier for long-lasting protection**
- Indoor/outdoor; will not harm surfaces; sprays on, dries clear
- Safe for fabrics and almost any surface; works like car-wax to protect the surface from the elements

AVAILABLE PRODUCTS

- 350633** 18.9 L (MTO)
- 350631** 3.78 L (MTO)
- 5212** 946 mL



FOR USE ON:

- Bathtubs, sinks, showers, boats, grout and tile, vinyl curtains, siding and more

KRUD KUTTER® MOULD & MILDEW STAIN REMOVER

Krud Kutter Mould & Mildew Stain Remover Plus Blocker removes tough mildew stains and protects as it cleans.

- **Environmentally friendly, bleach-free formula**
- Ideal for use on most interior and exterior surfaces
- Fresh floral scent

AVAILABLE PRODUCTS

- 287851** 946 mL

CLEANERS/DEGREASERS



FOR USE ON:

- Exterior siding and roofing gutters, wood fences and decks, carpets, stucco, brick, concrete and more

KRUD KUTTER® ORIGINAL
CLEANER DEGREASER

Original Krud Kutter Concentrated Cleaner/Degreaser Stain Remover cuts grease, grime, oil, tar and wax fast. No other single product removes really tough soils as quickly and effectively from so many surfaces.

- **Concentrated commercial strength formula that can be used full strength or diluted with water**
- Colour fast, fabric safe and leaves no residue
- Earth friendly — water-based, non-toxic and biodegradable
- Multi-surface compatibility

AVAILABLE PRODUCTS

- KK55** 208 L
- KK05** 18.9 L
- 287777** 3.78 L
- 287785** 946 mL



FOR USE ON:

- Tools, machinery, hands and other surfaces

KRUD KUTTER® HEAVY DUTY
CLEANER/DEGREASER WIPES

Krud Kutter industrial strength wipes are gentle on skin and fortified with an emollient, they won't crack or dry hands. The textured fabric won't scratch surfaces and is ideal for scrubbing tough soils, while the smooth side wipes surfaces clean. The formula won't leave behind a residue, dries on its own, leaves a pleasant citrus scent, and there is no rinsing required. This cleaner cuts through the toughest tar, grease, wax, ink, paint, lubricants, and adhesive.

- **Dual sided towel — smooth side for hands and textured weave for scrubbing**
- Cuts grease & grime
- Citrus scent
- No rinsing required

AVAILABLE PRODUCTS

- 346527** 30 Count Container

CLEANERS/DEGREASERS



FOR USE ON:

- Machinery and equipment, engines, tires, grills, ovens, tiles, carpet, upholstery and more

MEAN GREEN®
SUPER STRENGTH

Powerful, multi-purpose cleaner and degreaser that can get grease out and eliminate grime from most surfaces. From fabric to concrete, Mean Green has been a trusted brand for more than 20 years. It is used to clean just about everything inside and outside.

- **Multi-Purpose cleaner and degreaser**
- Can be used full strength or diluted
- Hard surface & fabric safe

AVAILABLE PRODUCTS

- 101FE** 3.78 L
- 196FE** 2.84 L
- 136FE** 946 mL



FOR USE IN:

- Janitorial/sanitation, factories, restaurants, garages, automotive, pressure washing, parts washing, and other industrial uses

MEAN GREEN®
INDUSTRIAL STRENGTH

Mean Green Industrial Strength is a highly effective, concentrated, heavy-duty all-purpose cleaner and degreaser. Eliminates grease and grime challenges faced by industrial users. Professional grade product contains 40% more active ingredients than Mean Green Super Strength.

- **Eliminates grease and grime**
- Dissolves oil
- NSF listed for use in food processing plants

AVAILABLE PRODUCTS

- MG104** 208 L (MTO)
- 106E** 18.9 L (MTO)



FOR REMOVAL OF:

- Machinery and equipment, engines, tires, grills, ovens, tiles, carpet, upholstery and more

MEAN GREEN®
ORANGE CHAMP

A multi-purpose, multi-surface cleaner and degreaser with orange power. Orange Champ cuts through tough grease and grime leaving a fresh citrus aroma, a scent of clean. It gives a powerful clean that is safe on most washable surfaces.

- **Multi-Purpose cleaner and degreaser**
- Fresh citrus scent
- Hard surface & fabric safe

AVAILABLE PRODUCTS

- 73124FE** 946 mL

DISINFECTANTS



FOR USE IN:

- Hospitals, nursing homes, nurseries, medical offices, schools, military installations, athletic facilities, public areas, ambulances, institutional kitchens, cafeterias, restaurants, public restrooms, hotels and motels, garbage and refuse centres, shower and bath areas, zoos, prisons, HVAC and R equipment, dental offices, emergency areas, healthcare facilities, intensive care, operating rooms, dental operatories, by police, and EMS

CONCROBIUM® BROAD SPECTRUM DISINFECTANT II

Concrobium Broad Spectrum Disinfectant II is a germicidal detergent formulated to clean, disinfect and deodorize in a simple one-step process.

- **Kills bacteria, viruses and tuberculosis**
- Botanically derived and ready-to-use formula does not have a harsh lingering odour
- One-step solution offers proven disinfection with superior cleaning performance, without the premium price
- Plant-based ingredients are non-toxic and biodegradable; no ammonias, chlorines or glutaraldehydes
- Health Canada Registered (DIN 02483882)
- CFIA Approved
- Xactimate Code: WTR-GRMB

AVAILABLE PRODUCTS

- 621208 208 L (MTO)
- 621004 3.78 L



RUST REMOVERS



FOR USE ON:

- Porcelain, acrylic, fibreglass, stucco, brick, cement, glass, chrome and stainless steel


CONCROBIUM® CALCIUM, LIME & RUST REMOVER

Concrobium Calcium, Lime & Rust Remover is a non-corrosive, readily biodegradable solution that safely and effectively removes calcium, lime, rust and hard water stains with no toxic fumes. It's also septic safe.

- **Non-corrosive**
- No VOCs
- Biodegradable
- Septic safe

AVAILABLE PRODUCTS

- 628257 946 mL

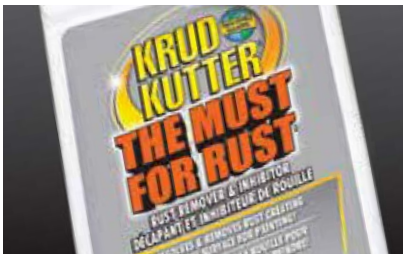

FOR USE ON:

- Iron, steel, aluminum, chrome, auto cooling systems and more

KRUD KUTTER® THE MUST FOR RUST

Krud Kutter The Must for Rust is a superior rust remover and inhibitor. This proprietary formulation penetrates into every void of a metal surface and dissolves rust/oxidation through chemical action. When dry, the clean surface is free of contaminants and is ready for the next step, whether it be painting, welding, plating, lubricating, etc.

- **Water-based formula penetrates metal surfaces, dissolves rust and prevents future rusting**
- Provides ideal surfaces for painting

AVAILABLE PRODUCTS

- 287810 946 mL



FOR USE ON:

- Iron, steel, aluminum, chrome, auto cooling systems and more

KRUD KUTTER® THE MUST FOR RUST REMOVER GEL

New to the Krud Kutter family, The Must for Rust Remover GEL is the perfect solution for horizontal and vertical surfaces! The gel formula penetrates into every void of a metal surface and dissolves rust/oxidation through chemical action. Once completely dry, the surface is ready for the next step, whether it is painting, welding, plating, lubricating, etc. or simply leave the surface bare.

- **Water-based**
- Biodegradable

AVAILABLE PRODUCTS

- 304612 946 mL

RUST REMOVERS



FOR USE ON:

- Washrooms/bathrooms, kitchens, outdoor

KRUD KUTTER® CALCIUM, LIME & RUST STAIN REMOVER

Krud Kutter Calcium, Lime & Rust Remover is a strong formula that efficiently dissolves and removes tough calcium and lime deposits as well as rust stains from the surface of showers, sinks, glass, tubs, toilets, coffee machines and kettles. Will not harm lawn or plants when used as directed. Do not apply to paint, stains or brick that contain iron oxide pigments.

- **Tackles the toughest calcium, lime and rust deposits**
- Dissolves mineral deposits and stains
- Biodegradable and septic safe

AVAILABLE PRODUCTS

305108 828 mL



FOR USE ON:

- Iron, steel, aluminum, chrome and more

WHINK® RUST STAIN REMOVER

Whink Rust Stain Remover in the “brown bottle” has been removing rust since 1947! This convenient liquid formula quickly and easily removes rust stains from white sinks and white toilets, as well as colourfast fabric and carpets.

- **Quickly & easily removes rust stains!**
- Safe on white sinks, white toilets, pipes and septic systems
- Won't harm fabrics
- No scrubbing required

AVAILABLE PRODUCTS

346831 946 mL

346833 473 mL



FOR USE ON:

- Eliminating build-up caused by soap scum and calcium in washrooms/bathrooms, kitchens and outdoors

WHINK® LIME & RUST REMOVER

Whink Lime & Rust Remover quickly dissolves rust & hard water stains, soap scum and build-up on bathroom sinks, tile, shower doors, tubs and toilets. Also leaves fibreglass, stainless steel and chrome sparkling clean. Non-abrasive, professional strength formula is specially designed for hard water areas. Dissolves away unsightly buildup without scrubbing. Can also be used full strength to clean lime scale build-up in humidifiers, vaporizers, tea kettles and cookware.

- **Dissolves hard water problems and removes rust stains fast**
- Great for eliminating build-up caused by soap scum and calcium
- Professional strength

AVAILABLE PRODUCTS

346843 946 mL

RUST REMOVERS



FOR USE IN:

- Toilets

WHINK® RUSTGUARD®

Whink RUSTGuard contains no acids, caustics, chlorine bleach, phosphates or dyes and won't attack plumbing like chlorine bleach cleaners can! This unique formula prevents the formation of rust and hard water build-up in your toilet bowl and reservoir!

- **Safe on all plumbing and septic systems**
- Won't harm pets
- Stops rust with every flush

AVAILABLE PRODUCTS

346846 113 g / 2 tab pack



FOR USE ON:

- Iron, steel, ferrous metals

RUST-OLEUM® RUST DISSOLVER JELLY

Rust-Oleum Rust Dissolver Jelly removes rust from iron, steel and other ferrous metal surfaces. Also removes bluing from steel. Provides excellent clinging properties that help make the process fast and easy.

- **Excellent cling**
- Applies clear
- Removes rust from metal surfaces
- Ideal for heavy rust

AVAILABLE PRODUCTS

338483 236 mL

DRAIN & SEPTIC



FOR USE IN:
• Kitchen, bathroom and shower drains

WHINK® HAIR CLOG BLASTER!®

Whink Hair Clog Blaster! is a fast acting bathroom drain opener designed to specifically attack and break down hair clogs! Hair is the biggest bathroom drain clog problem and Hair Clog Blaster is the answer!

- **Professional strength liquid formula**
- Pours through standing water
- Attacks and breaks down hair and soap scum
- Safe on all pipes and septic systems

AVAILABLE PRODUCTS
346838 946 mL



FOR USE IN:
• Kitchen sinks, bathroom/washroom sinks and drains

ROTO-ROOTER® GEL CLOG REMOVER

The Roto-Rooter Gel Clog Remover professional formula's precise viscosity powers through standing water and clings to the clog until it is destroyed. Works quickly to dissolve nearly all types of drain clogs. Tackles the toughest clogs from hair, soap scum, grease and more.

- **Starts working immediately to clear blocked drains**
- Perfect viscosity to penetrate and cling to the clog
- Safe for use in all pipes, septic systems and garbage disposals

AVAILABLE PRODUCTS
1193 2.37 L



FOR USE IN:
• All pipes

WHINK® SEPTIC TREATMENT

Whink Septic Treatment dissolvable packs — easy to use, use regularly to prevent future problems.

- **3 no-mess packets; 3 month supply / one packet per month**
- Contains septic-cleaning bacteria and enzymes
- Digests organic solids, fats and oils
- Safe for all pipes and septic systems

AVAILABLE PRODUCTS
346841 128 g / 3 pack

MOISTURE CONTROL



FOR USE IN:
• Basements, crawlspaces, attics, storage lockers, storage bins/totes, safes, boats, cars & RVs, garages/sheds

CONCROBIUM® ODOR & MOISTURE CONTROL DESICCANT PACKS

Restoration professionals are trusted to pack, transport and store their customers' valuable contents. Yet stored contents and their containers are often subjected to high humidity and stagnant air. Concrobium Odor and Moisture Control Desiccant Packs ensure contents remain odour-free, dry and protected.

- **Absorb and control musty odour in packed contents boxes, containers and pods**
- Reduce humidity in contained, unattended spaces to help protect contents against moisture damage, musty odour and corrosion
- Low profile, easy-to-place pouches that fit easily into pack-out boxes
- Non-toxic and easily discarded after use
- Packs will continue to absorb odours and moisture in 60% RH conditions for at least 30 days

AVAILABLE PRODUCTS
6851353 1 kg
6751092 260 g
6951002 50 g



SPECIALTY CLEANERS



FOR USE IN:

- Residential, commercial, industrial, institutional facilities

CONCROBIUM®
ODOR ELIMINATOR

Concrobium Odor Eliminator's unique probiotic formula effectively neutralizes odours on hard and fabric surfaces caused by flooding/water damage, garbage, compost/food waste, human waste, pets, smoke and more.

- **Probiotic formula eliminates odours at the source**
- Can also be used as a pre-cleaner
- Fresh scent
- The product does not need classification according to OSHA HazCom Standard 29 CFR paragraph (d) of 1910.1200(g), GHS Rev 03, and WHMIS 2015

AVAILABLE PRODUCTS

628333 946 mL



FOR USE ON:

- Carpets and upholstery including rugs, floor mats, fabric drapes, fabric couches, throw rugs, fiber carpeting (synthetic fibers and wool) and stain resistant coatings

CONCROBIUM® CARPET SHAMPOO

Concrobium Carpet Shampoo is a non-toxic, odour-blocking solution that leaves carpets and upholstery with a deep, long-lasting clean. The special formulation contains Concrobium's antimicrobial technology to eliminate and prevent musty odors cause by mould and mildew. It contains no soaping agents, so there's no sticky residue left behind to cause resoiling and dulled appearance.

- **Safe for all types of carpets and upholstery**
- Eliminates musty odours
- No need for anti-foaming additives
- For use with standard rental and pro hot water extractor carpet cleaning machines
- Fragrance-free

AVAILABLE PRODUCTS

216004 3.78 L

215189CC 1.89 L



FOR REMOVAL OF:

- Dirt, grease, grime, smoke, mildew stains, food stains, heel marks, crayon, old wallpaper paste and wax from painted or unpainted wood, metal or vinyl wallpaper

MOLDEX® PAINT PREP

Moldex Paint Prep is a "Ready to Use Cleaner / TSP Alternative" that is water-based, environmentally friendly, and out-performs traditional hazardous solvents when used to clean and prepare surfaces for paint. Formulated specifically for cleaning hard-to-remove mould and mildew stains.

- **No need to rinse with water; this bleach-free formula is non-toxic, biodegradable and safer for use around children and pets**
- Non-corrosive/phosphate free
- Safe near carpets; no oily residue
- Improves paint adhesion

AVAILABLE PRODUCTS

8122 650 mL

SPECIALTY CLEANERS



FOR REMOVAL OF:

- Adhesive caulk, foam insulation, mastic, silicone, roofing tar, asphalt, diesel, soot and more

KRUD KUTTER®
ULTRA POWER REMOVER

Krud Kutter Ultra Power Specialty Adhesive Remover is a highly safe alternative to acetone, paint thinners and other traditional solvents.

- **Quick release, professional strength formula that does not contain any petroleum solvents, bleach or ammonia**

AVAILABLE PRODUCTS

287858 473 mL



FOR USE ON:

- Aluminum, brick, cinder block, concrete, fibreglass, Formica, glass, metals, plastic, street signs, stainless steel, etc.

KRUD KUTTER®
GRAFFITI REMOVER

Krud Kutter Graffiti Remover is the ultimate spray paint and graffiti remover.

- **Safe, water-based formula**
- Removes acrylic, aerosol paint, enamel, high gloss, oil lacquers, primer, sealers, permanent markers, ink and more

AVAILABLE PRODUCTS

287852 946 mL



FOR USE ON:

- Asphalt, concrete, masonry, composite/wood decks, patios, walkways and more


KRUD KUTTER®
OIL GRABBER® STAIN REMOVER

Krud Kutter Oil Grabber Oil Stain Remover absorbs and lifts embedded oil stains without scrubbing.

- **Removes anti-freeze, brake, diesel, hydraulic and transmission fluids, cooking oils, grease, tree sap and wax**

AVAILABLE PRODUCTS

287779 946 mL

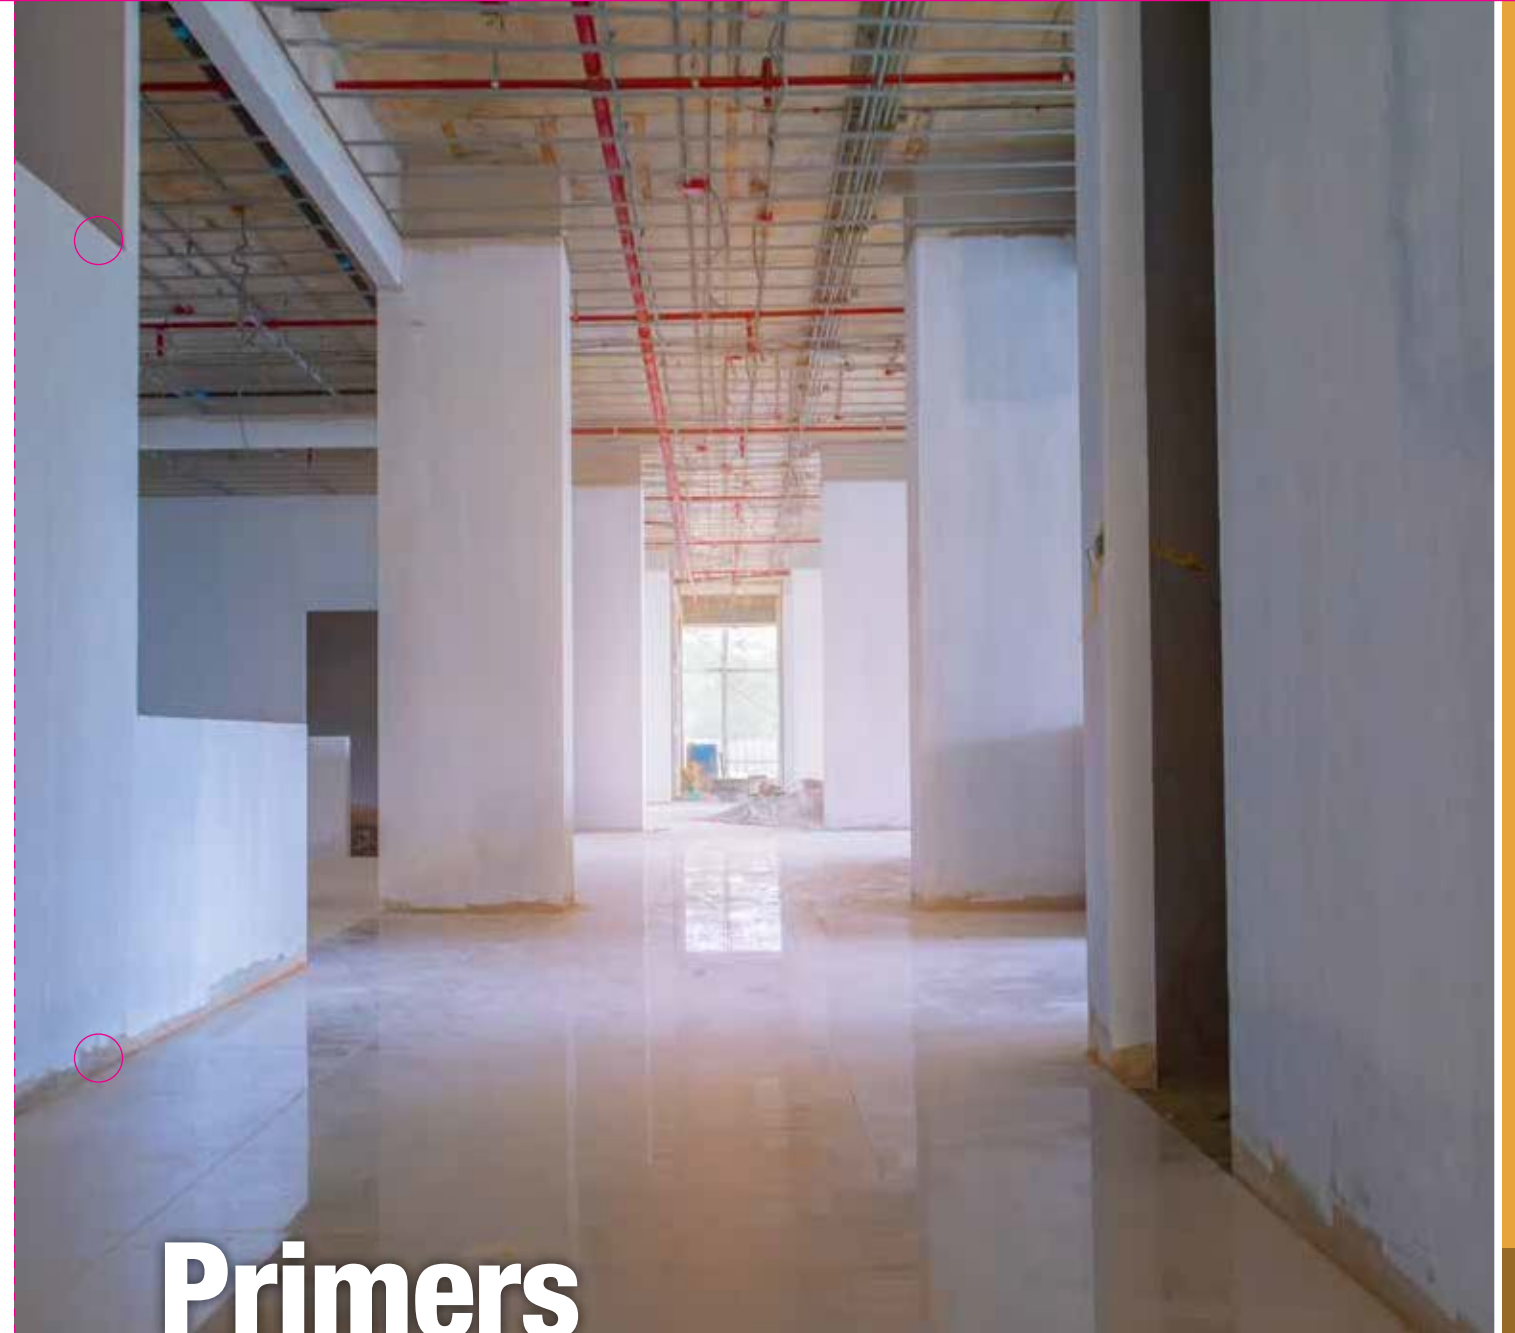

Primers

Rust-Oleum Primers have a solution for every problem. From mould and mildew, to stains and protection, our wide range of high-performance Primers makes it easy to resolve common issues. Professional quality, fast-drying formulas make problem solving simple.



ARCHITECTURAL



FOR USE ON:

- Interior and exterior surfaces including new drywall, wood, masonry, metal, glossy surfaces and more
- Completely and effectively blocks stains from crayons, graffiti, grease spots, tannins – even light water stains
- MPI # 3, 6, 17, 107, 125, 134, 137

ZINSSER® BULLS EYE 1-2-3® WHITE WATER-BASED PRIMER-SEALER

Bulls Eye 1-2-3 is a whole-house, universal interior and exterior, water-based stain-blocking primer-sealer. Excellent adhesion to glossy surfaces, including tile and enamelled trim. Low odour and easy-to-apply with great flow and levelling. Breathable, flexible acrylic formula resists blistering and peeling.

- **Mould and mildew-resistant film makes it great for high humidity areas**
- Application at temperatures as low as 2°C (35°F)
- Tintable
- Dries to touch in 30 minutes; can be recoated in 1 hour

AVAILABLE PRODUCTS

Z02014 946 mL Z02012 3.78 L
Z02010 18.9 L 267189 369 g

APPLICATION

SUBSTRATE

VOC g/l

VOC <100

Covers: 37-42 m²
(400-450 ft²) per 3.78 L



FOR USE ON:

- All types of bare or painted surfaces including wood, drywall, cured plaster, concrete, stucco and masonry, aluminum, vinyl, steel, galvanized metal and PVC

ZINSSER® BULLS EYE 1-2-3® GREY WATER-BASED PRIMER-SEALER

Zinsser Bulls Eye 1-2-3 Grey Primer is an all purpose, high performance, water-based primer for interior and exterior residential, commercial and industrial applications. Bulls Eye 1-2-3 Grey Primer has excellent stain blocking resistance, is fast drying and has excellent adhesion to glossy surfaces. Use Bulls Eye 1-2-3 Grey Primer with rich or dark topcoat colours to improve their hide and coverage. The dried film is mould and mildew resistant.

- **Improves hide and coverage of deep colour paints**
- Seals uniformly; blocks stains
- Dries to touch in 30 minutes; can be recoated in 1 hour

AVAILABLE PRODUCTS

201746 946 mL 201791 3.7 L

APPLICATION

SUBSTRATE

VOC g/l

VOC <100

Covers: 37 m²
(400 ft²) per 3.7 L



FOR USE ON:

- Old glossy paints and clear finishes, metal, fibreglass, PVC, composites, glass and tile

ZINSSER® BULLS EYE 1-2-3® DEEP TINT WATER-BASED PRIMER-SEALER

Bulls Eye 1-2-3 DEEP TINT offers the same interior and exterior, all-surface, all-purpose performance of Bulls Eye 1-2-3 and allows the addition of more tint to reach colour depths not possible with typical primers. This high-performance water-based primer-sealer/stain blocker/bond coat is designed to accept up to 24-48 mL per litre to tone the surface towards the finish colour and increase the hiding power of the topcoat.

- **Use over or under any oil or water-based paint**
- Dries to touch in 30 minutes; can be recoated in 1 hour

AVAILABLE PRODUCTS

Z02134 902 mL Z02131 3.6 L

APPLICATION

SUBSTRATE

VOC g/l

VOC <100

Covers: 37-42 m²
(400-450 ft²) per 3.6 L



FOR USE ON:

- Non-porous interior and exterior surfaces; masonry, siding, metal, and drywall

ZINSSER® MOULD STOP WHITE WATER-BASED PRIMER

ZINSSER Mould Stop Primer is a water-based coating that can be used to paint over existing stains left by mould, mildew, moss, fungi and any other fungal organisms. The Mould Stop Primer contains an mildewcide to prevent the growth of mould, mildew and other fungal organisms on the paint film.

- **Prevents odour causing bacteria on paint film***
- Prime over existing mould and mildew stains
- Interior/Exterior; water-based
- Binds chalky siding, masonry, and metal
- Dries to touch in 30 minutes; can be recoated in 1 hour

*Inhibits the Growth of Mould and Mildew on paint film

AVAILABLE PRODUCTS

336964 946 mL 336961 3.78 L


APPLICATION

SUBSTRATE

VOC g/l

VOC <100

Covers: 37-41.8 m²
(400-440 ft²) per 3.78 L

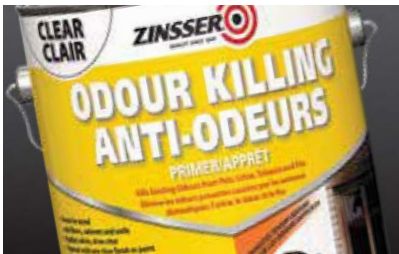

FOR USE ON:

- All painted or unpainted interior surfaces such as wood floors, cabinets, walls and ceilings, including drywall, cured plaster, masonry, metal and PVC

ZINSSER® ODOUR KILLING PRIMER CLEAR WATER-BASED PRIMER-SEALER

Zinsser Odour Killing Primer is a low odour, water-based primer that kills existing odours on interior surfaces. It applies white and dries fast to a clear, low sheen finish to permanently seal in odours. Odour Killing Primer is designed to eliminate difficult existing odours from pets (including urine), food, cigarette and cigar smoke, fire and smoke damage. Odour Killing Primer is compatible with all clear finishes and paints, both water and oil based.

- **Applies white, dries clear**
- Compatible with all paints and clear finishes
- Dries to touch in 25 minutes; can be recoated in 45 minutes

AVAILABLE PRODUCTS

316873 946 mL 316872 3.78 L 320240 340 g

APPLICATION

SUBSTRATE

VOC g/l

VOC <100

Covers: 32.5-37 m²
(350-400 ft²) per 3.78 L



FOR USE ON:

- Prime drywall, cured plaster, wood or metal doors, windows, paneling and trim; clean galvanized metal; glossy laminates and other interior surfaces
- MPI # 17, 39, 50

ZINSSER® BULLS EYE® WATER-BASED PRIMER-SEALER

This all-purpose formula, designed for the professional painter is great for interior walls, ceilings, doors, trim, panelling — any surface where a fast-drying, low odour, high-adhesion primer-sealer is required.

- **Blocks solvent-based stains to prevent them from bleeding through the topcoat**
- A quick-drying, quick-sanding, high hide, superior adhesion, stain-blocking primer that is compatible with all topcoats
- Dries fast and dead flat
- Dries to touch in 30 minutes; can be sanded or recoated in 1 hour

AVAILABLE PRODUCTS

254067 3.78 L

APPLICATION

SUBSTRATE

VOC g/l

VOC <100

Covers: 37 m²
(400 ft²) per 3.78 L

ARCHITECTURAL

ARCHITECTURAL



FOR USE ON:

- Drywall, wood, cured plaster, masonry, hardboard, vinyl, PVC, fiberglass, tile or metal
- MPI #17, 17X, 39, 50, 50X, 137, 137X, 149, 149X

ZINSSER® BULLS EYE ZERO™ WATER-BASED PRIMER

Bulls Eye Zero Primer delivers “best in class” performance in an eco-friendly, LEED compliant, zero VOC formula that’s great for all interior and exterior surfaces. It sticks to tough surfaces including chalky siding and hardboard.

- **Seals porous surfaces like drywall, new wood, concrete and “builders flat” in just one coat**

- Packaged in a container made from 100% recycled plastic
- Dries to touch in 30-45 minutes; can be recoated in 1 hour

AVAILABLE PRODUCTS

254282 3.78 L

APPLICATION

SUBSTRATE

VOC g/l

VOC ZERO

Covers: 37 m² (400 ft²) per 3.78 L



FOR USE ON:

- Hardboard, chipboard, glass, ceramic tile, PVC, metal pipes and galvanized duct work
- MPI #36, 46, 50, 136

ZINSSER® B-I-N® SHELLAC BASE PRIMER-SEALER

B-I-N is the original pigmented shellac-based stain-killing primer-sealer. Great for knots, water stains, fire and smoke damage. Best interior new wood primer. Dries in minutes; recoat in 30 minutes. Seals in tough stains, pet, smoke and fire odours. Great under all topcoats.

- **Use on all interior surfaces and for spot priming on exterior surfaces**

- Sticks to all surfaces without sanding, etching or deglossing
- Dries to touch in 15 minutes; can be recoated in 30 minutes

AVAILABLE PRODUCTS

Z00918 473 mL Z00911 3.7 L
Z00914 946 mL Z00910 18 L Z01018 369 g

APPLICATION

SUBSTRATE

VOC g/l

VOC <550

Covers: 37-47 m² (400-500 ft²) per 3.7 L



FOR USE ON:

- Wood, drywall, cured plaster, masonry, galvanized metal, PVC and glass and ceramic tile

ZINSSER® B-I-N® ADVANCED SYNTHETIC SHELLAC

B-I-N Advanced is a synthetic shellac base primer-sealer that provides the ultimate in stain blocking for whole-surface interior priming and exterior spot priming. It combines fast dry time, low application odour, outstanding hide and superior stain blocking, making it the ideal choice for new construction, remodelling and fire and water damage restoration.

- **Sticks to all surfaces**

- High hiding
- Blocks odours
- Dries to touch in 25 minutes; can be recoated in 45-60 minutes

AVAILABLE PRODUCTS

273873 3.78 L

APPLICATION

SUBSTRATE

VOC g/l

VOC <100

Covers: 37 m² (400 ft²) per 3.78 L

ARCHITECTURAL



FOR USE ON:

- Wood, panelling, Formica®, glossy paints and varnishes, tile, drywall, cured plaster, masonry, metal and PVC

ZINSSER® B-I-N® 2 ALKYD PRIMER-SEALER

B-I-N 2, a soy-based alkyd primer, stain blocker, and odour sealer, is an economical alternative to B-I-N Shellac Base Primer Sealer. It seals difficult stains from water, fire and smoke damage and can be used to spot prime knots and sap streaks. B-I-N 2 also seals odours from smoke, food and pet accidents.

- **Sticks to all surfaces without sanding or deglossing**
- Dries to touch in 35 minutes; can be recoated in 2 hours

AVAILABLE PRODUCTS

261663 946 mL 261664 3.78 L

APPLICATION

SUBSTRATE

VOC g/l

VOC <350

Covers: 37 m² (400 ft²) per 3.78 L



FOR USE ON:

- Wood, hardboard, drywall, cured plaster and masonry, spackled areas, ceiling tiles, wood and metal doors
- MPI # 45, 69, 136, 223

ZINSSER® COVER STAIN® OIL-BASED PRIMER-SEALER

Cover Stain is an all-purpose oil-based stain-blocking primer-sealer. Ideal for interior and exterior applications. Recoat in only two hours. Great for cedar bleed. May be used under any oil-based or water-based topcoat.

- **Seals water, smoke and nicotine stains**

- Seals porous surfaces; Sands easily
- Dries to touch in 30 minutes; can be recoated in 2 hours

AVAILABLE PRODUCTS

256185 946 mL 256184 3.7 L
256188 18.9 L Z03618 369 g

APPLICATION

SUBSTRATE

VOC g/l

VOC <350

Covers: 37-41.8 m² (400-450 ft²) per 3.7 L



FOR USE ON:

- Wood, drywall, cured plaster, concrete, stucco and masonry, aluminum, vinyl, galvanized, PVC, panelling, laminates, and ceramic tile
- MPI # 45, 136

ZINSSER® ODORLESS OIL-BASED PRIMER-SEALER

Odorless Oil-Based Stain Blocker is a high-solids, low VOC specialty primer for interior use when the stain blocking performance of an oil is required, but odour is a concern. Developed specifically for “people-sensitive” areas in commercial and residential environments, the state-of-the-art sprayable formula has even less odour than most water-based primers.

- **Non-yellowing, dries flat to a bright white finish and sands easily**

- Excellent at blocking stains from water, smoke, nicotine, graffiti, tannin and more
- Dries to touch in 30 minutes; can be recoated in 2 hours

AVAILABLE PRODUCTS

248264 946 mL 248263 3.78 L
254168 369 g

APPLICATION

SUBSTRATE

VOC g/l

VOC <350

Covers: 33-37 m² (350-400 ft²) per 3.78 L

ARCHITECTURAL



FOR USE ON:

- PVC sheeting & piping, vinyl, tile, glazed block and brick, galvanized steel, drywall, masonry, glass, panelling
- MPI #17

ZINSSER® BONDZ®
URETHANE-ACRYLIC
MAXIMUM ADHESION
PRIMER

Bondz Maximum Adhesion Primer is an interior/exterior water-based primer that bonds any top coat, including solvent based and epoxies, to hard, dense surfaces. The fast-drying urethane modified acrylic formula can be top coated in just 2 hours, faster than other bonding primers.

- **Bonds hard, dense surfaces to any top coat**
- Exceptional flow and levelling
- Outstanding wet adhesion; very low odour and low VOC levels
- Dries to touch in 30 minutes; can be recoated in 1 hour, 6 hours for two-part epoxies

AVAILABLE PRODUCTS

262281 946 mL 262282 3.7 L

APPLICATION

SUBSTRATE

DRYWALL WOOD

MASONRY METAL

TILE

VOC g/l

VOC <100

Covers: 37 m²
(400 ft²) per 3.7 L



FOR USE ON:

- New construction and repainting or repair of interior drywall

ZINSSER® GARDZ®
PROBLEM SURFACE
SEALER

Zinsser Gardz is a new technology, fast-drying, water-based, penetrating sealer and sizing for interior wall and surface covering. It penetrates, seals and binds unstable surfaces.

- **Mould and mildew resistant film**
- Higher build for porous surfaces
- Seals textured surfaces
- Wallpaper strippable
- Dries to touch in 30 minutes; can be recoated in 3 hours

AVAILABLE PRODUCTS

289393 916 mL 289394 3.61 L

APPLICATION

SUBSTRATE

DRYWALL

VOC g/l

VOC <100

Covers: 33-42 m²
(350-450 ft²) per 3.61 L



FOR USE ON:

- Acrylic, ABS, fiberglass, PVC, nylon, polycarbonate, polypropylene, polyurethane, TPO, priming plastics, moulded parts, vinyl, windows, doors, shutters, fencing, light poles, facia, vents, trim & mouldings and more

ZINSSER® VINYL & PLASTIC
BONDING PRIMER

Zinsser Vinyl & Plastic Bonding Primer is ideal for prepping hard-to-paint plastic and vinyl surfaces found in homes and building construction. Great for vinyl, windows, doors, shutters, fencing, light poles and more.

- **Bonds paint for long-lasting adhesion**
- Prevents paint from peeling
- Topcoat with oil-based, water-based, 2K urethane or 2K epoxy paint
- Dries to touch in 20-30 minutes; can be recoated in 2-3 hours

AVAILABLE PRODUCTS

289379 916 mL

APPLICATION

SUBSTRATE

PLASTIC

VOC g/l

VOC <100

Covers: 15 m²
(162.5 ft²) per 916 mL

ARCHITECTURAL



FOR USE ON:

- Wood/wood siding, PVC/plastic, plywood, brick, stucco, masonry, concrete, plaster, aluminum, aluminum siding, metal, galvanized steel, and fiberglass

ZINSSER® PEEL STOP®
PLUS HIGH BUILD
BINDING PRIMER

Peel Stop Plus High Build Binding Primer is a high-performance water-based binding primer that stops peeling paint by gluing down worn paint edges from previous paint jobs that can lead to topcoat cracking. It is 3 times thicker than regular primers, creating a smoother surface for finishing. Peel Stop Plus also has outstanding flexibility so topcoats last longer.

- **Stops peeling paint**
- Creates a smoother finish — seals weathered surfaces
- Outstanding flexibility; dries white
- Dries to touch in 30 minutes; can be recoated in 2 hours

AVAILABLE PRODUCTS

266847 946 mL 268560 3.78 L

APPLICATION

SUBSTRATE

DRYWALL WOOD

MASONRY METAL

VOC g/l

VOC <100

Covers: 5-19 m²
(50-200 ft²) per 3.78 L
(25-30 mils wet)



IDEAL FOR:

- New or previously painted wallboard, plaster ceilings and walls, and any wood trim
- MPI #43, 54

ZINSSER® PERMA-WHITE®
MOULD & MILDEW-PROOF™
WATER-BASED
INTERIOR PAINT

Perma-White Mould & Mildew-Proof Interior Paint is a water-based paint specifically designed to withstand the harsh conditions of the moisture-prone areas in your home. Its unique formulation prevents mildew growth on the paint film even under the harshest conditions.

- **Mould & Mildew-Proof guarantee for 10 years**
- Self-priming, available in satin or semi-gloss finishes
- Easy to apply
- Dries to touch in 60 minutes; can be recoated in 2 hours

AVAILABLE PRODUCTS

202714 Satin - 931 mL
202755 Semi-Gloss - 931 mL
202712 Satin - 3.78 L
202762 Semi-Gloss - 3.78 L

APPLICATION

SUBSTRATE

DRYWALL WOOD

MASONRY METAL

VOC g/l

VOC <50

Covers: 19-23 m²
(200-250 ft²) per 3.78 L
based on recommended
two-coat application

ARCHITECTURAL



FOR USE ON:

- All ceilings including kitchens, bathrooms, basements, closet, porch and more

ZINSSER® CEILING PAINT WATER-BASED STAIN-BLOCKER

Zinsser Ceiling Paint is a water-based ceiling paint that offers superior stain-blocking coverage in just one coat.

- **No-spatter formula; goes on pink, dries in one hour or less to a bright white flat finish that's mould and mildew resistant**
- Seals water and other household stains without the odour of oil-based primers or paints
- Hides imperfections on new or previously painted drywall, plaster, wood, textured and popcorn ceilings
- Dries to touch in 1 hour; can be recoated in 1 hour

AVAILABLE PRODUCTS

254065 3.7 L

APPLICATION

SUBSTRATE

DRYWALL

Covers: 23-37 m² (250-400 ft²) per 3.7 L



FOR USE ON:

- Heavy duty repairs, interior or exterior plaster, wood, drywall, wallboard, brick, concrete, stucco, paint and metal

ZINSSER® MH READY PATCH™

Get the strength of plaster and the workability of spackling paste with Zinsser Ready Patch Professional Formula Spackling & Patching Compound. This full-bodied product is durable enough for your most heavy-duty repairs, indoors or out.

- **Full-bodied for heavy-duty interior/exterior repairs**
- Shrink resistant – won't sag or crack like drywall mud
- Can be painted when dry to the touch
- May be primed or painted when dry to touch (normally less than 30 minutes)

AVAILABLE PRODUCTS

320254 473 mL

APPLICATION

SUBSTRATE

DRYWALL METAL



FOR USE ON:

- Basements, foundations, retaining walls and other interior or exterior concrete, stucco, masonry and concrete block surfaces

ZINSSER® WATERTITE® MOULD & MILDEW-PROOF* WATERPROOFING PAINT

WaterTite Mould & Mildew-Proof* Waterproofing Paint has a unique oil-based formula that combines a state-of-the-art waterproofing resin with Portland cement to create a coating that stops up to 34 psi of water pressure. It also contains a mildewcide to prevent the growth of mould and mildew for a minimum of five years after application, making it great for basements and other masonry surfaces where mould and mildew can be problematic.

- **LIFETIME WATERPROOF GUARANTEE, Mould & Mildew-Proof* GUARANTEE FOR 5 YEARS**
- Resists 34 psi of water pressure
- Smooth, non-gritty finish applies easily to wet or dry walls
- Ultra low odour oil-based formula has even less odour than latex paint
- Dries to the touch in 1 hour; can be recoated after 4 hours

*This product contains a mildewcide to prevent the growth of mould and mildew on the paint film only.

AVAILABLE PRODUCTS

Z05011 3.7 L Z05013 11.34 L

APPLICATION

SUBSTRATE

CONCRETE MASONRY

Covers: 7 m² (75 ft²) of porous surface on the first coat, 9.3 m² (100 ft²) on the second coat



FOR USE ON:

- Basements, foundations, retaining walls and other interior or exterior concrete, stucco, masonry and concrete block surfaces

ZINSSER® WATERTITE® LX MOULD & MILDEW-PROOF* LATEX WATERPROOFING PAINT

WaterTite LX is a multi-purpose, latex-based concrete and masonry waterproofing paint. It forms an impermeable barrier to water on interior or exterior, vertical or horizontal, concrete block, cast-in-place concrete and cementitious stucco. When applied to basement or cellar walls, it stops moisture from entering. When applied to canals or holding basins it stops water from exiting into the substrate. It is also an excellent block-filler for use in car washes, garages and exterior walls.

- **15-YEAR WATERPROOF GUARANTEE, Mould & Mildew-Proof* GUARANTEE FOR 10 YEARS**
- Resists 20 psi of water pressure
- Ultra-smooth finish
- Great for wet or dry walls
- Dries to touch in 2 hours; recoat in 2-3 hours

*This product contains a mildewcide to prevent the growth of mould and mildew on the paint film only.

AVAILABLE PRODUCTS

265652 3.78 L

APPLICATION

SUBSTRATE

CONCRETE MASONRY

Covers: 11.6 m² (125 ft²) per 3.78 L

REMEDICATION



- FOR USE ON:**
- Stucco, brick, tilt-up, pre-cast, or poured-in-place concrete as well as CMU and cement block
 - MPI #36, 46, 50, 136

ZINSSER® WATERTITE® FLEXIBLE PRIMER & FINISH

WaterTite Flexible Primer & Finish can be applied to a multitude of vertical concrete and masonry surfaces including stucco, brick, tilt-up, pre-cast, poured-in-place, CMU and cement block. This high build, moisture and mildew resistant, low VOC coating can be applied to fresh vertical concrete after 72 hours with a high alkali pH level up to 13.8 and offers elastomeric qualities to fill hairline cracks up to 1.5 mm (1/16”).

- **Expands and contracts to fill hairline cracks**
- One coat primes, two coats prime and finish
- Can be applied to new concrete & stucco within 72 hours
- Mildew resistant finish
- Tintable to 24 colours
- Dry to touch in 4 hours; recoat in 2 hours

AVAILABLE PRODUCTS

- 283569** Deep Tint Base - 3.55 L
- 283570** White Tint Base - 3.55 L

APPLICATION

SUBSTRATE

CONCRETE MASONRY

Covers: 9-12.5 m²
(100-135 ft²) per 3.55 L

REMEDICATION



- FOR USE ON:**
- Concrete
 - Masonry surfaces

ZINSSER® WATERTITE® HYDRAULIC CEMENT FOR CONCRETE & MASONRY

WaterTite Hydraulic Cement for Concrete & Masonry stops water flow from active and non-active water leaks. It permanently seals deep cracks and holes in all grades of concrete. Developed for use prior to waterproofing or painting, this quick-setting formula creates a watertight seal in 5 minutes, even when water is present.

- **Seals deep cracks and holes**
- Adheres to wet surfaces
- Creates watertight seal in 5 minutes
- Use for patching and anchoring

AVAILABLE PRODUCTS

- 266296** 1.13 kg

APPLICATION

SUBSTRATE

CONCRETE MASONRY



- FOR USE ON:**
- Concrete
 - Masonry surfaces

ZINSSER® WATERTITE® ETCH & CLEANER FOR CONCRETE & MASONRY

WaterTite Etch & Cleaner for Concrete & Masonry is a sulfamic acid-based etching and cleaning solution. Ideal for removing tough, caked-on efflorescence and excess mortar build-up on concrete, stone, brick, tile and galvanized metal when mixed with warm water. It also provides a light surface etch to promote the coating penetration and adhesion over concrete and other masonry surfaces.

- **Prepares concrete for waterproofing and painting**
- Removes efflorescence
- Safer than muriatic acid

AVAILABLE PRODUCTS

- 265985** 355 mL

APPLICATION

SUBSTRATE

CONCRETE MASONRY



- FOR USE ON:**
- Seal joints such as expansion and control joints, cracks in concrete walls, walkways, floors, windows, doors and panels

ZINSSER® WATERTITE® POLYURETHANE SEALANT FOR CONCRETE & MASONRY

WaterTite Polyurethane Sealant for Concrete and Masonry is a high performance, moisture-curing polyurethane joint sealant that seals and waterproofs. This permanently flexible joint filler was developed for use on interior and exterior concrete and masonry surfaces. Elastic and non-brittle, it will not break or chip.

- **Flexible joint filler**
- Fills cracks and voids
- Seals and waterproofs
- Remains flexible over time

AVAILABLE PRODUCTS


- 265984** 300 mL

APPLICATION

SUBSTRATE

CONCRETE MASONRY

REMEDiation

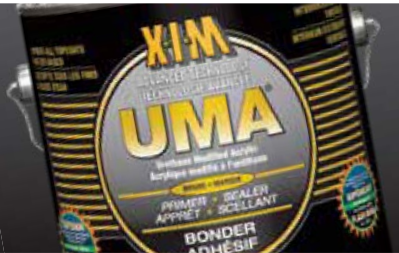

FOR USE ON:

- Wood, metal, most plastics, fiberglass, formica, tile, porcelain, glazed block, glass, ceramic, kynar siding, aluminum, galvanized steel, silicone polyester siding and more

X-I-M® ADVANCED®
TECHNOLOGY UMA®
BRAND

Advanced Technology UMA Brand bonder maintains adhesion under demanding conditions. Moisture destroys the adhesion of ordinary water-based primers to hard, glossy surfaces. Advanced Technology UMA Brand is engineered for unmatched wet adhesion, to either interior or exterior surfaces. It helps resist the problems of wrinkling, blistering or cracking caused by moisture penetrating the top coat. Contains FLASH BOND® TECHNOLOGY, a unique water-based NANO PARTICLE formulation for enhanced adhesion and hardness.

- **Adhesion to hard, glossy surfaces including Kynar®, tile, glass and Formica®**
- Cures in temperatures above 2°C (38°F)
- Bonds all topcoats; including those with latex, oil finishes, urethane, epoxy or lacquer
- Low odour and low VOC
- Dries to touch in 30-45 minutes; can be recoated in 24 hours

AVAILABLE PRODUCTS

1105C2 917 mL 1105C1 3.61 L 1105C6 18 L


APPLICATION

SUBSTRATE

VOC g/l

VOC <100

Covers: 42 m²
(450 ft²) per 3.61 L

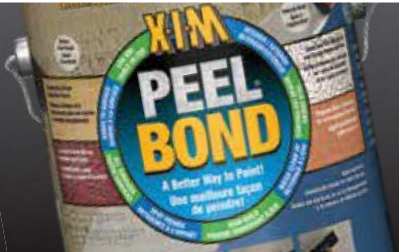

FOR USE ON:

- Wood, T1-11 siding, plywood, stucco, brick, aluminum, galvanized metal, fibreglass, PVC plastic, door frames, window sills/frames, walls, siding, shutters, barns/sheds, garage doors and more

X-I-M® PEEL BOND®

PEEL BOND is a high-build, water-based bonding primer that fills and repairs cracked and weathered surfaces for latex topcoats. PEEL BOND can be applied 33% thicker, up to 40 mils wet on a dry, vertical surface without sagging. It is a Thixotropic Polymer system designed to increase film build without sacrificing adhesion, film formation or spray-pump life.

- **Eliminates call backs**
- Longer lasting finish coat
- Cleans up with water
- Interior and exterior use
- Dries to touch in 30-60 minutes; can be recoated in 1-2 hours

AVAILABLE PRODUCTS

1146C1 3.61 L

APPLICATION

SUBSTRATE


VOC g/l

VOC <100

Covers: 4.6-37.2 m²
(50-400 ft²) per 3.61 L



REMEDICATION

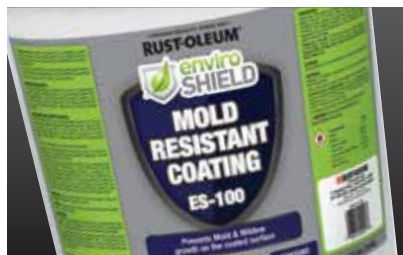

FOR USE ON:

- Poured concrete, concrete block, Brick/Masonry, stucco, wood, plywood/OSB, drywall, painted surfaces


ENVIROSHIELD™ MOLD RESISTANT COATING

EnviroSHIELD ES90 and ES100 are designed for restoration professionals and certified applicators to combat mould and mildew. These mould resistant coatings are ideal for new construction, remodeling or repair projects and contain advanced antimicrobial technology to prevent future mould and mildew growth on the coated surface.

- **ASTM* performance tested**
- Excellent coverage and hiding
- Water-based; easy clean up
- Dries to touch in 30 minutes; can be recoated in 20-30 minutes

AVAILABLE PRODUCTS

ES1005 Clear - 5 gallon
ES905 White - 5 gallon

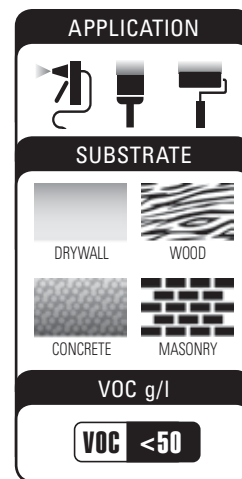

**Covers: 37 m²
(400 ft²) per gallon**



FOR USE ON:

- Treated and untreated lumber, OSB, particle board, masonry surfaces, concrete, brick, wallboard, composite construction materials


ENVIROSHIELD™ ODOUR & SMOKE BLOCKER

EnviroSHIELD Odour & Smoke/Stain Blocker coatings are designed for professionals and certified applicators to permanently encapsulate odours from fire, smoke, animals, nicotine and mildew. In addition, the white formula effectively covers and blocks difficult stains. These water-based coatings offer easy clean up and are low odour and low VOC.

- **Seals in offensive fire, animal and mildew odours**
- White formula covers and blocks stains
- Low odour, low VOC
- Water-based; easy clean up
- Dries to touch in 30 minutes; can be recoated in 45 minutes; 2 hours for sanding

AVAILABLE PRODUCTS

ES01005 White Tintable - 5 gallon

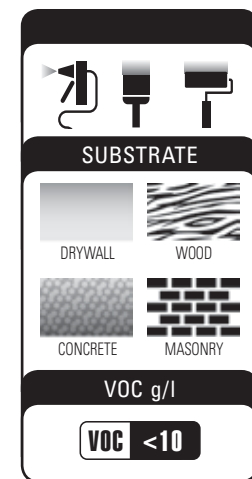

**Covers: 27-55 m²
(300-600 ft²) per gallon**



FOR USE ON:

- Any masonry surface stained by: heavy dirt, grime, soot, nicotine, oxidation


ENVIROSHIELD™ WATERLESS MASONRY CLEANER

EnviroSHIELD Masonry Cleaner is formulated with natural rubber and intended for the removal of heavy dirt, grime, soot, nicotine and stains on limestone, sandstone, marble, concrete, plaster, brick and terra cotta. Designed for both interior and exterior use, its waterless application makes it a very safe, effective acid-free solution that can be used virtually anywhere without making a mess. It is specifically formulated to work below the surface and pull out ugly stains that penetrated deep into the pores of most masonry material.

- **Water-based**
 - No water required
 - Apply, let dry and peel off
 - Dries to touch in 24 hours

AVAILABLE PRODUCTS

ESMCNPL1	1 gallon
ESMCNPL5	5 gallon

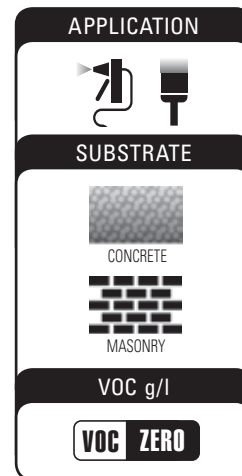

**Covers: 5-9 m²
(100-500 ft²) per gallon**



FOR USE ON:

- Treated and untreated lumber, OSB, particle board, masonry surfaces, concrete, brick, wallboard, composite construction materials


ENVIROSHIELD™ ODOUR & STAIN BLOCKER

EnviroSHIELD Odour & Stain Blocker permanently blocks stains and seals-in tough, deeply embedded smoke odours from fire damage surfaces. It also encapsulates and blocks the distinctive odours caused by animals, nicotine and musty mildew. It tackles tough stains including severe water damage, rust, nicotine, tannin, ink, pencil, marker, pet stains and more. It is a water-based primer, sealer or finish coat that is formulated to perform like a solvent or oil-based sealer without the harsh fumes. It can be used as a finish coat after cleaning to seal and fully restore finished interior painted surfaces. It applies white and dries non-gloss white. Odour & Stain Blocker can be used as a primer for top-coating with both latex and oil-based paints after it has thoroughly dried.

- ***Covers and blocks stains while sealing-in offensive fire and animal odours***
- White formula covers and blocks stains
- Low odour, low VOC
- Water-based; easy clean up
- Dries to touch in 30 minutes; can be recoated in 45 minutes; 2 hours for sanding

AVAILABLE PRODUCTS

ES0905 White Tintable - 5 gallon

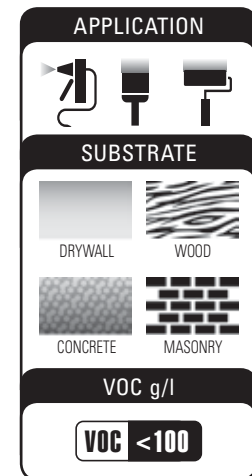

**Covers: 27-55 m²
(300-600 ft²) per gallon**

REMEDICATION



FOR USE ON:

- Drywall, plaster, wood, metal, vinyl, PVC, fiberglass, masonry

ENVIROSHIELD™ SHELLAC 9000 PRIMER SEALER STAIN & ODOUR BLOCKER

EnviroSHIELD Shellac 9000 is the ultimate odour and stain blocker and the choice of professionals for fire and water damage restoration. It permanently blocks severe stains and is an excellent odour barrier. Shellac 9000 will completely seal stains and odours from fire and water damage, smoke, mildew, pet urine, trauma scenes, graffiti, fire and furnace puff-backs, etc. This coating can be used on multiple interior and spot-exterior surfaces and is compatible with any architectural paint.

- **Pigmented shellac**
- Ultimate stain and odour blocking primer and sealer
- Permanently seals pet, smoke, nicotine and musty odours
- Outstanding adhesion
- Applies down to zero degrees Celcius
- Interior/spot exterior
- Dries to touch in 20 minutes; can be recoated in 45 minutes

AVAILABLE PRODUCTS

334376 White Tintable - 5 gal

APPLICATION



SUBSTRATE



DRYWALL WOOD METAL MASONRY

VOC g/l

VOC <100

Covers: 27-46 m²
(300-500 ft²) per gallon

REMEDICATION



FOR USE ON:

- Drywall, plaster, wood, metal, vinyl, PVC, fiberglass, masonry

ENVIROSHIELD™ OIL-BASED 7000 PRIMER STAIN & ODOUR SEALER

EnviroSHIELD Oil-Based 7000 is formulated for whole-surface interior priming. The premium blended high-solids formula combines outstanding adhesion, reliable stain-blocking and effective odour sealing performance characteristics making it an exceptional product for fire and water damage restoration. It dries fast and flat and is compatible with any architectural paint.

- **Seals and blocks stains and odours from smoke and fire damage**
- Blocks water stains, nicotine and graffiti and prevents bleed through
- Excellent adhesion, high hiding
- Applies down to five degrees Celcius
- Topcoat 2 hours
- Interior oil-based
- Dries to touch in 40 minutes; can be recoated in 2 hours

AVAILABLE PRODUCTS

334380 White Tintable - 5 gal

APPLICATION



SUBSTRATE



DRYWALL WOOD METAL MASONRY

VOC g/l

VOC <350

Covers: 27-46 m²
(300-500 ft²) per gallon



APPLY TO:

- Seal interior or exterior, vertical or horizontal concrete block and cast-in-place concrete

ENVIROSHIELD™ MASONRY 3000 WATERPROOF LATEX COATING

EnviroSHIELD Masonry 3000 Waterproof Coating forms an impermeable barrier to water on interior or exterior, vertical or horizontal concrete block and cast-in-place concrete. Backed by a 15 year waterproof and 10 year mould and mildew resistant finish guarantee, it stops moisture from entering or exiting a concrete surface. Masonry 3000 can be used to stop moisture from entering basement or cellar walls and concrete subfloors and will stop water from exiting when applied to canals and holding basins. This coating can also be used as a block filler for commercial applications such as car washes and garages where high performance topcoats are applied. It is not recommended for use in swimming pools or use in contact with potable water.

- **Blocks 20 PSI of water pressure — guaranteed**
- Meets ASTM D-7088, ASTM D-6904, ASTM D-5590
- Smooth bright white finish, tintable to off white to pastel & mid tones
- Protect from rain for 8 hours after application outside
- Interior/exterior; water-based
- Dries to touch in 2 hours; can be recoated in 2 hours

AVAILABLE PRODUCTS

334378 White Tintable - 5 gal

APPLICATION



SUBSTRATE



MASONRY

VOC g/l

VOC <100

Covers: 8.5-10 m²
(95-115 ft²) per gallon





Miracle Sealants®

The leader in professional-grade care and maintenance products for tile, grout, natural stone, brick and masonry surfaces. Premium-quality products rated #1 in performance and quality.



SEAL



WATER, STAIN & SLIP PROTECTION FOR:

- Grout, quarry tile, ceramic tile, glazed tile, porcelain tile, polished granite, terrazzo, polished marble, stucco, slate, quartz, travertine

MIRACLE SEALANTS® 511 IMPREGNATOR SEALER

The original impregnating sealer designed for the protection of all medium to dense porous surfaces. 511 Impregnator forms an invisible barrier that is resistant to moisture and stains while allowing vapour to escape. 511 Impregnator is not a surface coating and will not alter the natural look. All surfaces treated are harder and less slippery. Independent laboratory tests show 511 Impregnator outperforms competitive products. (Test results are available upon request)

- **Superior coverage; weather, oil & water resistant**
- UV transparent, will not yellow
- Can be used as grout release
- Safe for food areas; interior/exterior
- COVERAGE: Up to 90 m² (1,000 ft²) per 946 mL

AVAILABLE PRODUCTS
346475 473 mL 346476 946 mL



WATER, STAIN AND SLIP PROTECTION FOR:

- Grout, limestone, saltillo tile, slate, terra cotta, sandstone, flagstone, polished granite, cantera/adoquin, polished marble, flamed & honed granite, honed/textured marble

MIRACLE SEALANTS® 511 POROUS PLUS SEALER

511 Porous Plus is a penetrating sealer designed for the most porous surfaces. 511 Porous Plus forms an invisible barrier that is resistant to moisture and stains while allowing vapour to escape. 511 Porous Plus is not a surface coating and will not alter the natural look. All surfaces are harder and less slippery. Independent tests show 511 Porous Plus out performs competitive products. (Test results are available upon request)

- **Superior coverage**
- Weather, oil and water resistant
- UV transparent, will not yellow
- Can be use as grout release
- Safe for food areas; interior/exterior
- COVERAGE: Up to 90 m² (1,000 ft²) per 946 mL

AVAILABLE PRODUCTS
346485 236 mL 346486 473 mL 346487 946 mL



WATER AND STAIN PROTECTION FOR:

- Grout, quarry tile, ceramic tile, glazed tile, granite, marble, limestone, terrazzo, saltillo tile, slate, flagstone

MIRACLE SEALANTS® 511 H2O PLUS SEALER

A water-based penetrating sealer designed for the protection of all surfaces. 511 H2O Plus is not a surface coating and will not alter the natural look. 511 H2O Plus is VOC compliant and does not produce a strong odour. 511 H2O Plus contains no P.F.O.S. or P.F.O.A. components. Independent tests show 511 H2O Plus to be superior in performance. (Test results are available upon request)

- **Superior stain protection and oil and water resistance**
- Low odour; will not yellow
- Can be use as grout release
- Safe for food areas; interior/exterior
- COVERAGE: Up to 137 m² (1,500 ft²) per 3.78 L

AVAILABLE PRODUCTS
346483 946 mL 346482 3.78 L

SEAL



WATER, STAIN & SLIP PROTECTION FOR:

- Quartz and engineered stone

MIRACLE SEALANTS® 511 QUARTZ COUNTERTOP SEALER

511 Quartz Counter Top Sealer is an impregnating sealer designed for the protection of all quartz and medium to dense porous surfaces. 511 Quartz Counter Top Sealer forms an invisible barrier that is resistant to moisture and stains while allowing vapour to escape. 511 Quartz Counter Top Sealer is not a surface coating and will not alter the natural look. All surfaces treated are harder and less slippery.

- **Superior coverage**
- Weather, oil and water resistant
- UV transparent, will not yellow
- Can be use as grout release; safe for food areas; interior/exterior
- COVERAGE: Up to 23 m² (250 ft²) per 473 mL

AVAILABLE PRODUCTS
346489 473 mL



FOR USE ON:

- Glass shower tile

MIRACLE SEALANTS® 511 GLASS TILE & SHOWER DOOR SEALER

511 Glass Tile & Shower Sealer is specifically designed to protect glass tile and showers from staining, buildup and water spots. This easy-to-use formula is safe and effective indoors and out and is applied with a simple spray-on wipe off application. It will keep your glass surfaces clean longer and reduce cleaning times by as much as 80%. Prevents stains, water spots and excessive cleaning of glass surfaces.

- **Creates a barrier between glass and water**
- Glass is easier to clean
- Prevents calcium buildup; makes calcium removal easier
- Glass stays cleaner longer
- Interior and exterior use; UV transparent
- COVERAGE: Covers up to 16.7 m² (180 ft²) per 473 mL. Coverage varies depending on surface.

AVAILABLE PRODUCTS
346481 473 mL



WATER, STAIN AND SLIP PROTECTION FOR:

- Grout, ceramic tile, quarry tile, marble, granite and terrazzo

MIRACLE SEALANTS® TILE, STONE & GROUT SEALER

Tile, Stone & Grout Sealer penetrates into the pores of the surface to form a barrier that is resistant to moisture and stains while allowing complete vapour transmission. Tile, Stone & Grout Sealer is an entry-level low-cost alternative to impregnating/penetrating sealers. It is not a surface coating and will not alter the natural look. All surfaces treated are harder and less slippery. It can be used on both interior and exterior applications. Independent laboratory tests show Tile, Stone & Grout Sealer outperforms competitive products. (Test results are available upon request)

- **Stain and weather resistant**
- One Product = Multiple Uses; Easy-to-use
- Can be used as grout release
- Safe for food areas; interior/exterior
- COVERAGE: Up to 23.2 m² (250 ft²) per 946 mL

AVAILABLE PRODUCTS
346492 473 mL 346493 946 mL

SEAL



WATER AND STAIN PROTECTION FOR:

- All sanded and unsanded cementitious grout joints

MIRACLE SEALANTS® 511 GROUT SEALER AEROSOL

511 Spray-On Grout Sealer is a convenient aerosol spray designed for the protection of all cementitious grout surfaces. It can be applied to the grout before it has dried or cured completely. It forms an invisible barrier that offers maximum stain protection without changing the natural look of the grout. It is recommended for both interior and exterior applications. It utilizes similar technology to the proven 511 Impregnator. Can be used on all cementitious grout within 2-hours of finishing the grout process. It has been tested by Scientific Certification Systems and has received Indoor Advantage Gold Certification.

- **Stain and water resistant**
- Apply same day as grouting
- Safe for food areas; easy-to-use; interior/exterior
- COVERAGE: Grout: Up to 76 m² (250 ft²) per spray can

AVAILABLE PRODUCTS

346480 425 mL



WATER AND STAIN PROTECTION FOR:

- All sanded and unsanded cementitious grout joints

MIRACLE SEALANTS® GROUT SEALER

Grout Sealer is a sealer designed for the protection of all sanded and non-sanded grout joints. Grout Sealer forms an invisible barrier that is resistant to moisture and stains while allowing vapour to escape. Grout Sealer is not a surface coating and will not alter the natural look. Grout Sealer comes with a unique applicator tip for easy application.

- **Offers superior grout protection**
- Easy to use with applicator tip
- Interior/exterior
- COVERAGE: Up to 7 m² (75 ft²) per bottle

AVAILABLE PRODUCTS

346479 177 mL



WATER AND STAIN PROTECTION FOR:

- All sanded and unsanded cementitious grout joints

MIRACLE SEALANTS® GROUT SHIELD SEALER

Miracle Grout Shield is a specialty sealer additive that mixes with “sanded” and “non-sanded” cement grout instead of water to provide the best stain protection. Mixes with grout in place of water “eliminating the weakest link” in a grout job/project. Best protection for those who cannot wait for their grout to cure before sealing with Miracle Sealants 511 Products.

- **Improves compressive, tensile & flexural strengths**
- Improves water resistance, stain resistance and colour consistency

AVAILABLE PRODUCTS

346478 710 mL **346477** 2 L

ENHANCE



NATURAL STONE POLISH FOR:

- Countertops
- Fireplaces
- Vanities
- Walls

MIRACLE SEALANTS® STONE POLISH

Stone Polish nourishes and enriches the natural beauty and polish of marble, granite, agglomerate, terrazzo, stone countertops, vanities, fireplaces and walls. Stone Polish is not recommended for floors. Stone Polish is easy to use, with no machinery necessary for removal.

- **High shine**
- Easy to use
- Not for floors
- COVERAGE: 68 m² (750 ft²) per 946 mL

AVAILABLE PRODUCTS

346488 946 mL



READY TO USE SOLVENT BASE IMPREGNATOR/COLOUR ENHANCER FOR:

- Granite, marble, natural stone, slate, limestone, ceramic tile, quarry tile, grout, polished stone – Not for concrete/masonry without testing

MIRACLE SEALANTS® 511 SEAL & ENHANCE

511 Seal & Enhance is a unique, solvent-base formula designed to eliminate the need to use an impregnator before using a colour enhancer for maximum stain protection and superior colour enhancement. 511 Seal & Enhance will enhance the colour and rejuvenate the appearance of tumbled, honed, acid-washed, sandblasted, flamed, textured, even polished stone and tile surfaces. In addition, 511 Seal & Enhance revitalizes old and worn stone and tile installations. It can be used successfully in both interior and exterior environments and is freeze/thaw resistant.

- **Superior coverage; best for floors**
- Weather, stain, oil and water resistance; will not yellow
- Can be use as grout release; safe for food areas
- Interior/exterior
- COVERAGE: Up to 90 m² (1,000 ft²) per 946 mL

AVAILABLE PRODUCTS

346490 473 mL **346491** 946 mL

CLEAN



**SPRAY AND WIPE CLEANER
AND RE-SEALER FOR:**

- All ceramic tile, porcelain tile, quartz, polished or unpolished natural stone

**MIRACLE SEALANTS® 511
KLEEN & RESEAL**

511 Kleen & Reseal is a unique formula designed to remove dirt and soil from natural stone and tile, including vanities, showers and furniture and reseals in one easy step. 511 Kleen & Reseal will cut through dirt and soil with no rinsing, streaking or soapy residue left behind. 511 Kleen & Reseal is safe for all types of surfaces.

• **Neutral pH is safe for all surfaces**

- Re-seals with each use
- Safe for counters and food areas
- Ready-to-use, no scrubbing
- Contains 511 H2O Plus
- COVERAGE: Covers up to 46 m² (500 ft²) per 946 mL. Coverage will vary depending on surface product is used upon.

AVAILABLE PRODUCTS

346484 946 mL



FOR USE ON:

- Granite, non-polished marble, cement, slate, sandstone, brick, flagstone, ceramic tile, masonry, grout, quarry tile, porcelain tile, non-polished natural stone

**MIRACLE SEALANTS®
HEAVY DUTY ACIDIC CLEANER**

Heavy Duty Acidic Cleaner is a fast acting, heavy duty acid cleaner for textured, non-polished, natural and manufactured surfaces. Heavy Duty Acidic Cleaner removes cementitious grout and mortar residue, joint cement, lime and hard water deposits, efflorescence, rust and other heavy dirt and grime.

• **Easy-to-use; fast-acting**

- Interior/exterior
- Dilutable; strong acid
- COVERAGE: Approximately 18.5 - 371 m² (200 - 4000 ft²) per 3.78 L with standard dilution

AVAILABLE PRODUCTS

346467 946 mL **346465** 3.78 L



FOR USE ON:

- Concrete, quarry tile, non-polished natural stone, granite, ceramic & porcelain tile, brick, masonry surfaces, grout

**MIRACLE SEALANTS®
PHOSPHORIC ACID CLEANER**

Cleaning for cast surfaces including pre-cast concrete, non-polished natural surfaces including flamed and honed granite, tumbled and honed marble, cleft and honed slate, quarry tile, flamed and honed limestone, unglazed ceramic tile, porcelain tile, cement grout, brick, concrete, mortar and masonry. Removes cementitious grout residue and dirt build up.

• **Fast-acting; easy-to-use**

- Milder than other acidic cleaners
- Dilutable
- Interior/exterior
- COVERAGE: Up to 277 m² (2,500 ft²) per 3.78 L

AVAILABLE PRODUCTS

346470 946 mL

CLEAN



FOR USE ON:

- Granite, marble, limestone, travertine, natural stone, ceramic tile, quarry tile, grout, porcelain tile, slate

**MIRACLE SEALANTS®
TILE & STONE CLEANER**

Tile & Stone Cleaner is a pH neutral cleaner designed for all tile, stone, grout and masonry surfaces. Strong enough for the professional, yet gentle enough for the do-it-yourself specialist. Tile & Stone Cleaner is a nontoxic cleaner that can handle the most difficult stains, yet is gentle enough for everyday use. It comes in both a ready to use spray and a concentrate for diluting options.

• **Safe for food areas**

- One product = Multiple uses
- No odour; safe for regular use
- Easy-to-use
- COVERAGE: Up to 909 m² (10,000 ft²) per 3.78 L

AVAILABLE PRODUCTS

346473 946 mL **346472** 3.78 L



**SPECIALTY NO-RINSE
MAINTENANCE CLEANER FOR:**

- Honed & textured limestone, honed terrazzo, honed & textured marble

**MIRACLE SEALANTS®
LIMESTONE & TRAVERTINE
STONE SOAP**

Limestone/Travertine Stone Soap is a specially formulated no rinse stone soap designed for easy ongoing maintenance of honed, tumbled, textured limestone, marble, travertine, terrazzo and other stone containing calcium. It produces a protective film that protects the surface of the stone. It only reacts with the calcium in the stone so there is no risk of buildup like a traditional floor coating. Non-textured surfaces can be buffed with a floor machine and white nylon pad for added patina or shine. Helps recreate an old world finish.

• **Hides scratches and etch marks; biodegradable, non-toxic**

- No-rinse; does not build up; easy-to-use
- COVERAGE: Approximately 23.2 - 162.5 m² (250 - 1,750 ft²) per 946 mL with recommended dilution ratios

AVAILABLE PRODUCTS

346469 946 mL



**STAIN REMOVING ABSORBENT
POWDER FOR:**

- All tile, all natural stone, clay pavers, concrete and masonry surfaces

**MIRACLE SEALANTS®
POULTICE PLUS POWDER MIX**

An easy to use, fine, non-acidic absorbent powder designed to work with different cleaners/ chemicals to draw out most stains from most absorbent surface materials.

• **Fast & effective**

- Non-acidic
- Non-bleach
- COVERAGE: Coverage will vary depending on density, porosity, texture, surface absorption, weather, time solution is left on the surface and application methods. Used as directed, Poultice Plus will clean approximately 0.45 - 1 m² (5 - 10 ft²) per 454 g container

AVAILABLE PRODUCTS

346471 454 g

CLEAN



SPECIALTY DEEP CLEANING ACTION FOR MOST SURFACES INCLUDING:

- Marble, limestone, sandstone, flagstone, brick, masonry, grout, clay pavers

MIRACLE SEALANTS®
LIQUID POULTICE (2-PART)

Liquid Poultrice is an environmentally safe, biodegradable cleaner designed for deep cleaning all porous stone materials and grout including acid sensitive surfaces. The cleaning action of Liquid Poultrice penetrates deep into the pores of the surface to safely lift out various types of dirt and grime. Liquid Poultrice is especially effective for cleaning organic materials like coffee and tea.

• **Biodegradable**

- Environmentally safe
- Easy-to-use
- Non-acid
- Interior/exterior
- COVERAGE: Up to 90 m² (1,000 ft²) per 3.78 L mixed solution

AVAILABLE PRODUCTS

346468 3.78 L x 2



UNIQUE POLISHING COMPOUND FOR MAINTAINING:

- Marble, travertine, terrazzo, limestone, other natural stone

MIRACLE SEALANTS®
WATER RING & ETCH REMOVER

Water Ring & Etch Remover is a unique, fast-acting polishing powder specially formulated to remove water rings, light scratches and etch marks. Can be used with a floor or hand machine.


• **Fast & effective**

- Non-oxalic acid
- Easy-to-use
- COVERAGE: Coverage will vary depending on density, porosity, texture, surface absorption, weather, time solution is left on the surface and application methods. Used as directed, Water Ring & Etch Remover will cover up to 3.5 - 7 m² (37.5 - 75 ft²) per 113 g container.

AVAILABLE PRODUCTS

346474 113 g

ACCESSORIES

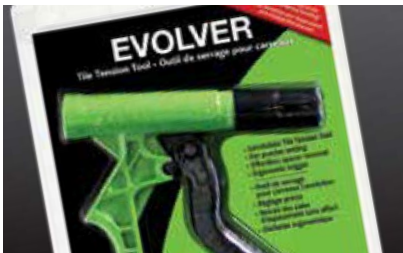

TILE SPACING & LEVELLING SYSTEM FOR:

- Floor and wall installations, all tile and natural stone tiles, all tile sizes

MIRACLE SEALANTS®
LEVOLUTION TOOLS

Levolution is a revolutionary Tile Spacing & Leveling System designed for all tiles, especially large format tile. Levolution is an all in one system and can be used for both floor & wall installations! It's Spacer/Anchor comes in 3 sizes to accommodate for a 3 mm (1/16"), 4 mm (1/8") or 4.5 mm (3/16") grout joint. The universal spacers offers 3-in-1 profiles which include Cross (+) for straight grid patterns, Tee (T) for brick grid patterns and Flat (-) for edges at walls for all patterns. Levolution can be used with tile or stone with thicknesses up to a 12.7 mm (1/2") inch.

Levolution requires only one piece per intersection regardless of the tile size so you are laying tiles instead of extra spacers saving you time and money. Other systems on the market require up to 4 pieces per intersection and an additional piece every 12" with large format tiles. Levolution can save up to 51% in labour over other systems.

• **Fast and level floor and wall installs**

- Saves time; tile spacer and levelling anchor in one piece
- Re-usable caps
- Endorsed & used by Industry Professionals
- Patented system

AVAILABLE PRODUCTS

- 346496 Levolution Evolver Tool
- 346497 Levolution Universal Caps
- 346498 Levolution Universal Spacer 1/16"
- 346499 Levolution Universal Spacer 1/8"
- 346500 Levolution Universal Spacer 3/16"



FOR USE WITH:


- Miracle Sealants repellents and sealants

MIRACLE SEALANTS®
MIRA BRUSH APPLICATOR

The Mira Brush is a unique hand applicator designed for use with Miracle Sealants repellents and sealants. A foam reservoir disperses solution evenly onto the surface. In addition, a convenient applicator tray for ease of application.

AVAILABLE PRODUCTS

346494 Applicator

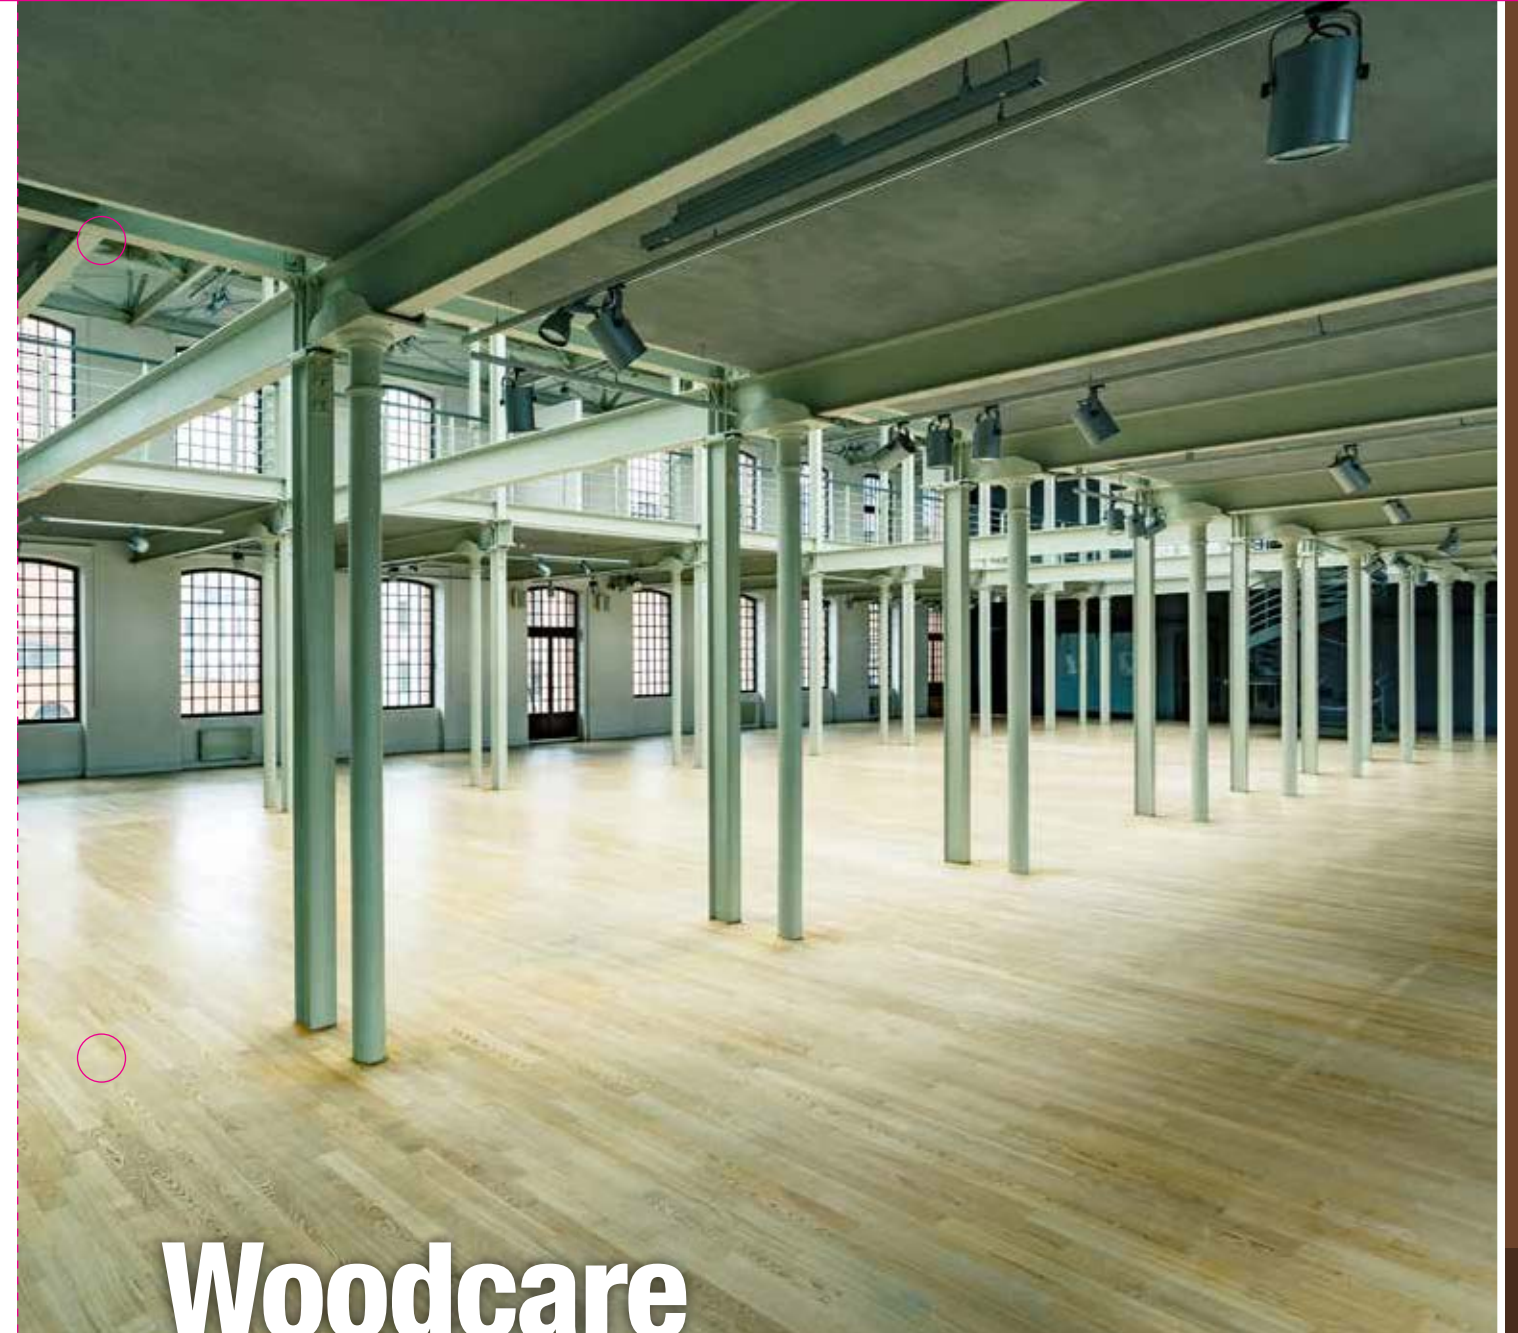

Woodcare

Rust-Oleum's diverse products are cost effective, durable and provide protection to any project. The unique formulas for interior and exterior wood projects and floor finishes outperform the competition for scratch and stain resistance. In addition, they provide the best protection for heavy foot traffic and weather durability. Varathane products offer a quality finish and superior protection — so don't just finish it, Varathane it!





FOR USE ON:

- All interior wood surfaces requiring protection from spills, wear and abrasion

VARATHANE® PROFINISHER
CLEAR FINISH INTERIOR
(OIL-BASED)


Premium quality, ultra durable professional clear coating. This low VOC oil-based formula is ideal for all interior applications, including floors, and delivers outstanding performance with superior scratch and stain resistance. It also offers smooth flow and great levelling properties with an ambering effect on light woods and stains.

• Professional grade durability

- Fingerprint resistant
- Dry to recoat in 4-6 hours
- Dry to use in 12-15 hours

AVAILABLE PRODUCTS

- 271385 Clear Gloss - 3.78 L
- 271386 Clear Semi-Gloss - 3.78 L
- 271387 Clear Satin - 3.78 L
- 282567 Clear Matte - 3.78 L



Practical Coverage
at Recommended DFT
(assumes 15% material loss)
31-63 m² (340-680 ft²) per 3.78 L
(Smooth, dense woods);
26-57 m² (280-620 ft²)
per 3.78 L (Porous woods)



FOR USE OVER:

- Almost any surface; from rough and unfinished to stained, painted or smooth surfaces

VARATHANE® BAR & TABLE
FINISH INTERIOR (EPOXY)


Bar & Table Finish pour-on finish; is an ultra-thick, high gloss, crystal clear epoxy that provides maximum durability. Ideal as a waterproof finish for table and bar tops, it is also great for crafts and refinishing furniture. It can be used over almost any surface; from rough and finished to stained, painted or smooth surfaces.

• One coat is as thick as 75 coats of varnish

- Provides maximum durability
- Waterproof
- Heat and chemical-resistant
- Ideal for table and bar tops, crafts and furniture refinishing
- Kit contains: 946 mL Part A - Resin, 946 mL Part B - Activator, stir stick, 1 pair of gloves and instruction sheet

AVAILABLE PRODUCTS


- 334575 Clear - 1.89 L Kit



Covers: 1.19 m²
(12.8 ft²) per 1.89 L





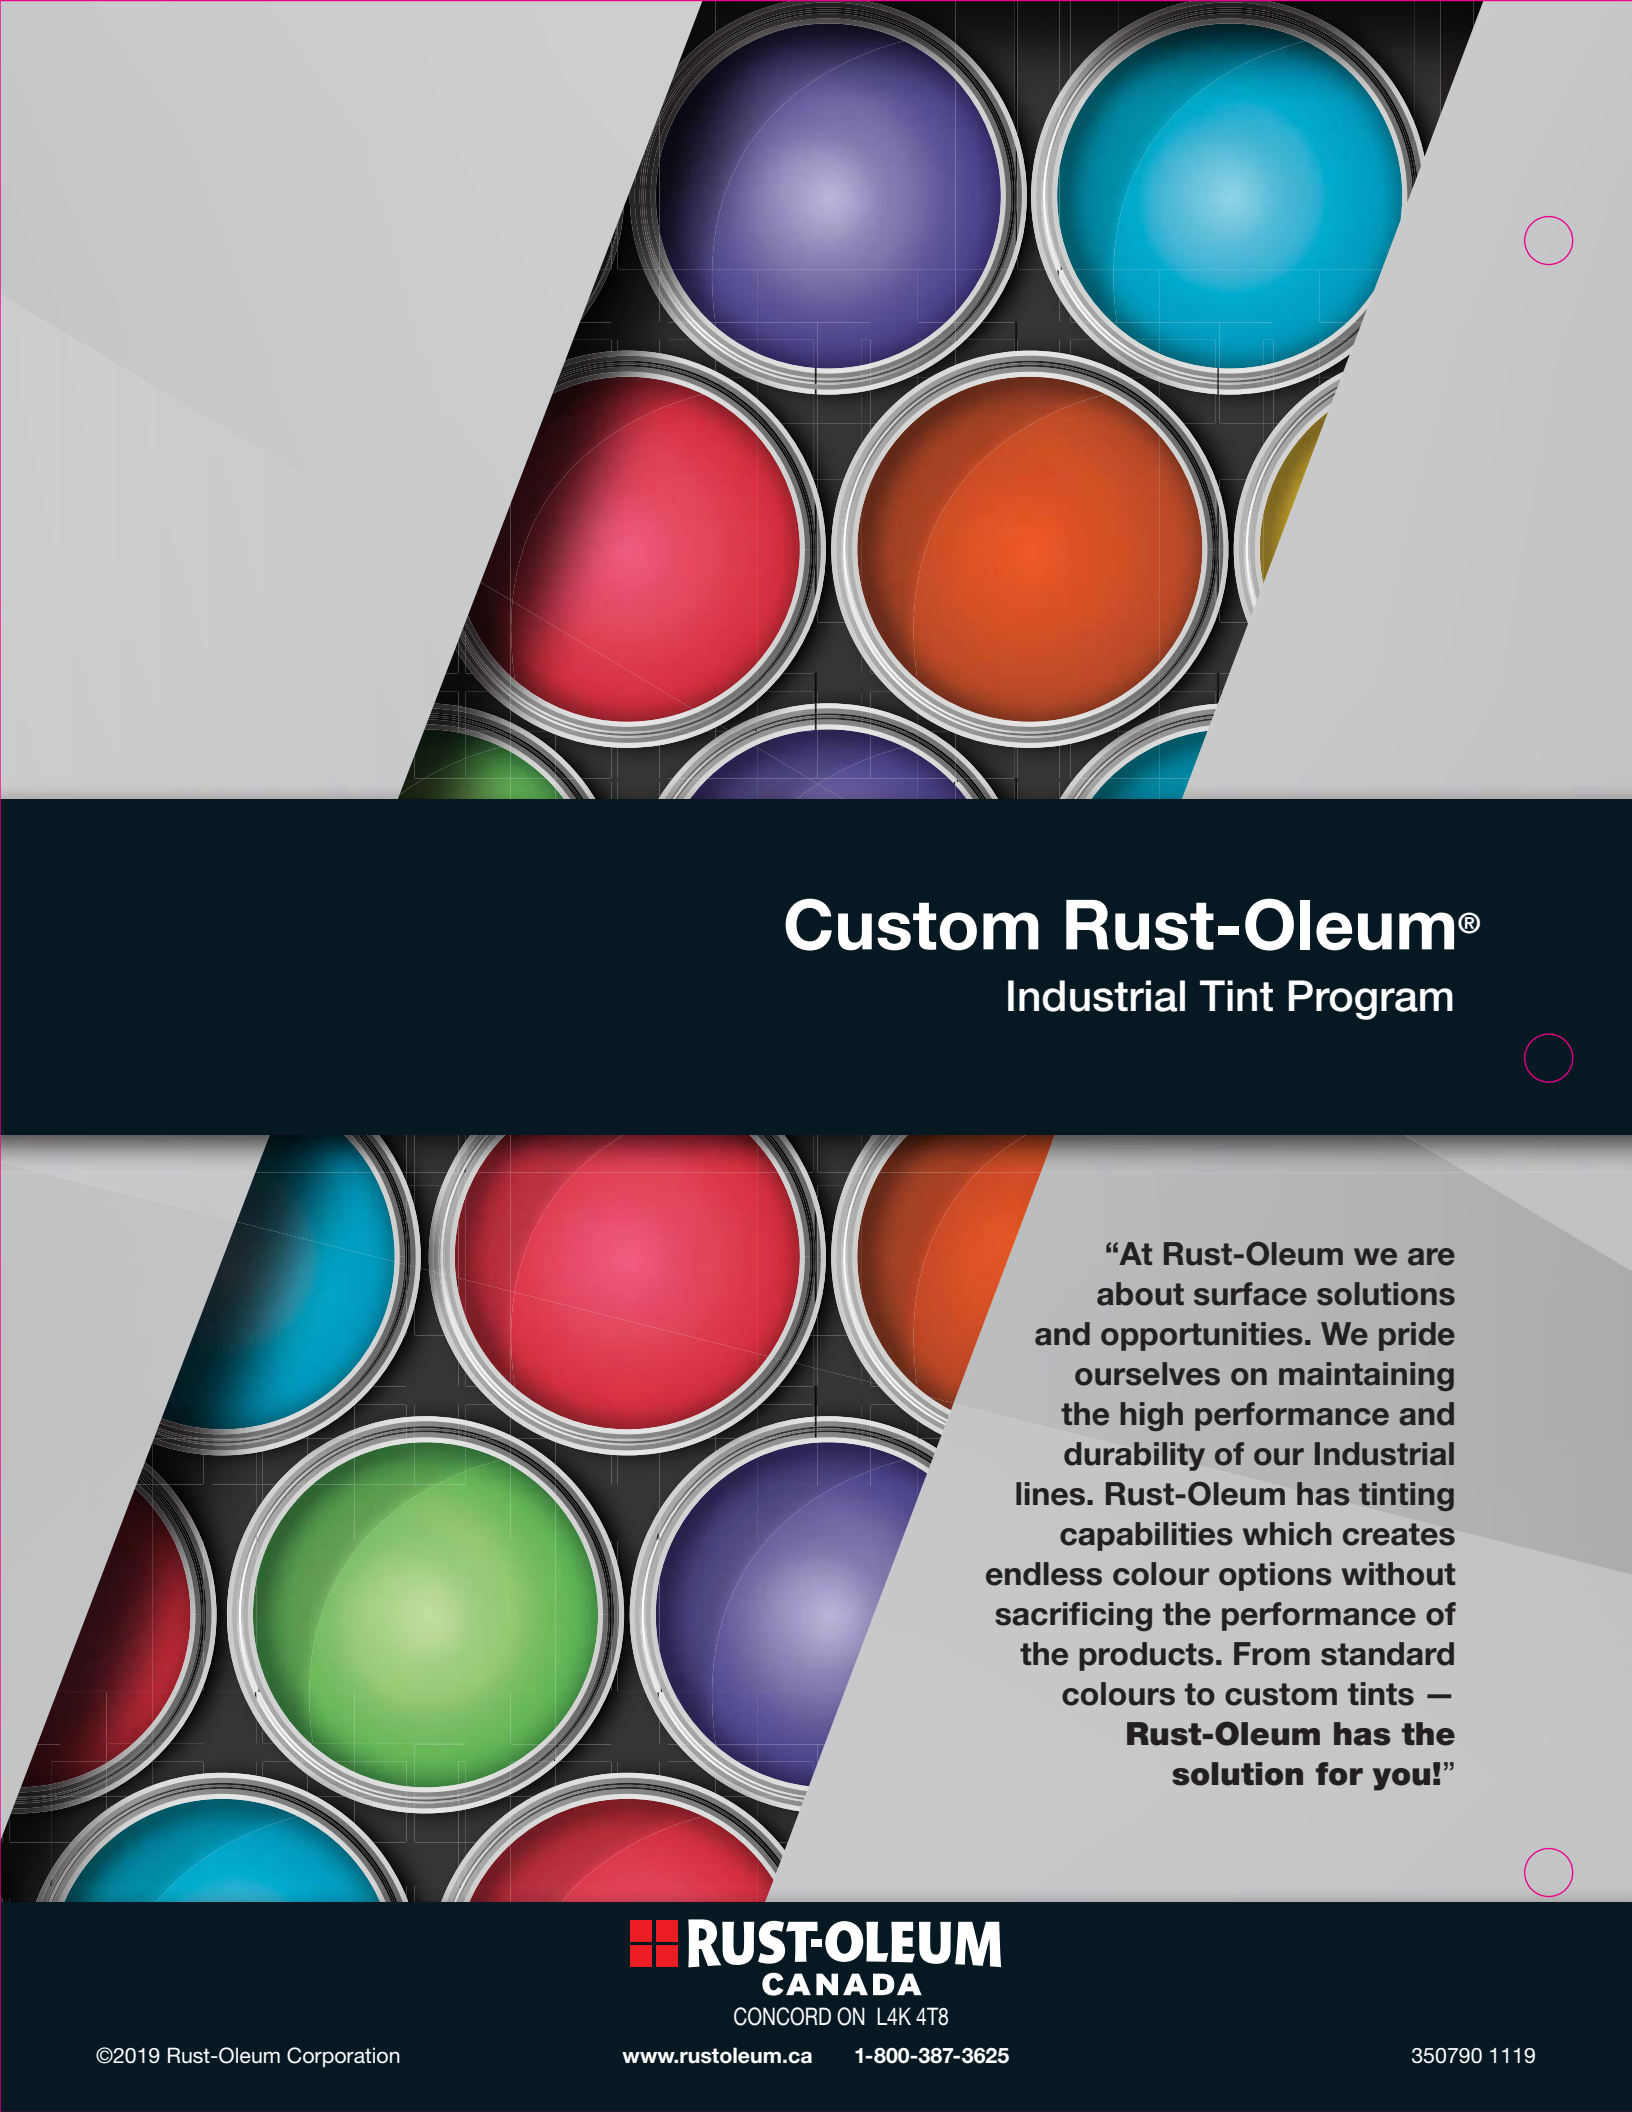

Custom Rust-Oleum®

Industrial Tint Program

“At Rust-Oleum we are about surface solutions and opportunities. We pride ourselves on maintaining the high performance and durability of our Industrial lines. Rust-Oleum has tinting capabilities which creates endless colour options without sacrificing the performance of the products. From standard colours to custom tints — **Rust-Oleum has the solution for you!**”

 **RUST-OLEUM**
CANADA

CONCORD ON L4K 4T8